



Securing Your Containers. Protecting Your Cargo.
At Sea. Over Land. On Rail.™

TWISTLOCK ASSEMBLIES


Retractable | Non-Retractable | Screwdown

Designed for 20' to 53' **CHASSIS** and Steel or Aluminum **FLATBED TRAILERS**




CHASSIS Twistlocks w/ Light Holes

Left & right models, all **Non-Retractable**:




1101-1131-L

Front Curbside/Rear Roadside
1 Light Hole




1101-1131-R

Front Roadside/Rear Curbside
1 Light Hole




1101-1206-L

Front Curbside/Rear Roadside
3 Light Holes




1101-1206-R

Front Roadside/Rear Curbside
3 Light Holes



1101-1207-L


Front Curbside/Rear Roadside
2 Light Holes*



1101-1207-R


Front Roadside/Rear Curbside
1 Light Hole*

*Models w/ Ø3/4" & Ø2-3/4" I.D. light holes on 45° side also available



1101-3817-L*


Front Curbside/Rear Roadside
2 Light Holes



1101-3817-R*


Front Roadside/Rear Curbside
1 Light Hole

*Detent spring & balls in shear block, not in pin;
Models w/ Low-profile pin also available: 1101-3817-LP-L/R



1101-3206-L


Front Curbside/Rear Roadside
2 Light Holes**



1101-3206-R


Front Roadside/Rear Curbside
2 Light Holes

**Model 1101-3206-ABS-L includes an add'l ABS light hole




1101-3207-L

Front Curbside/Rear Roadside
2 Light Holes




1101-3207-R

Front Roadside/Rear Curbside
1 Light Hole



1101-3406-L


Front Curbside/Rear Roadside
2 Light Holes***



1101-3406-R


Front Roadside/Rear Curbside
2 Light Holes

***Model 1101-3406-ABS-L includes an add'l ABS light hole



1101-3407-L

Front Curbside/Rear Roadside
2 Light Holes




1101-3407-R

Front Roadside/Rear Curbside
1 Light Hole

CHASSIS Twistlocks w/ Light Holes

Left & right models, all **Non-Retractable**:

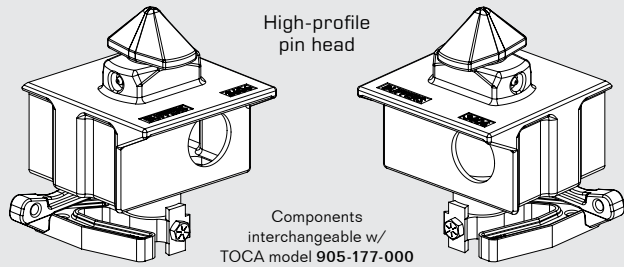


1101-3606-L

Front Curbside/Rear Roadside
1 Light Hole

1101-3606-R

Front Roadside/Rear Curbside
1 Light Hole

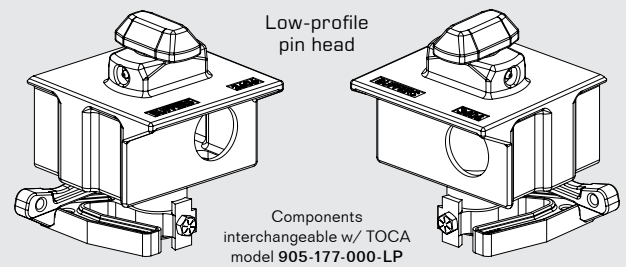


1101-3606-LP-L

Front Curbside/Rear Roadside
1 Light Hole

1101-3606-LP-R

Front Roadside/Rear Curbside
1 Light Hole

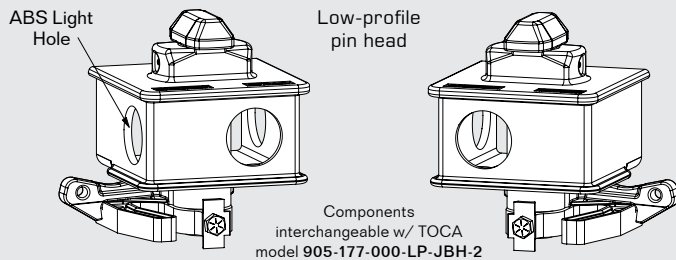


1101-3706-L

Front Curbside/Rear Roadside
3 Light Holes

1101-3706-R

Front Roadside/Rear Curbside
2 Light Holes

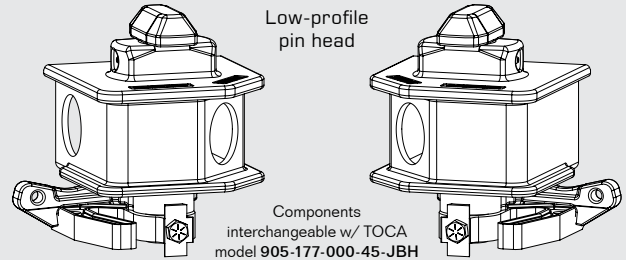

1101-3707-L


Front Curbside/Rear Roadside
2 Light Holes

1101-3707-R

Front Roadside/Rear Curbside
1 Light Hole

CHASSIS Retractable Twistlocks w/o Light Holes


No left or right models. **Retractable (R)** models can be made **Non-Retractable (NR)** by adding a bushing:

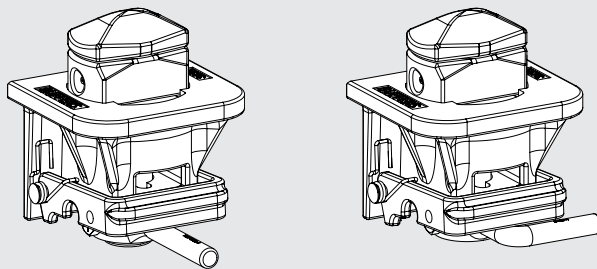

1101-3633-R
1101-3633-NR

1101-3623-R
1101-3623-NR


- Standard types w/ 7 ³/₁₆" (183 mm) retracted length
- Standard backplate: 4 ⁹/₁₆" (116 mm) H x 4 ³/₄" (120 mm) W
- Interchangeable between retractable and non-retractable
- Straight (3633) or bent (3623) handle
- Spring-loaded latch included

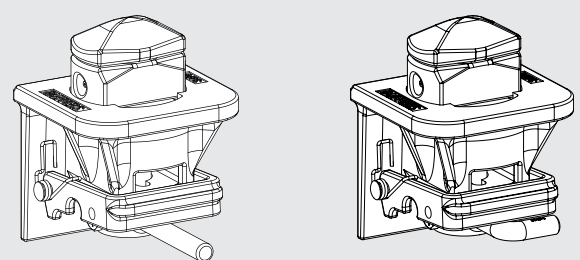

1101-3690-R
1101-3690-NR

1101-3695-R
1101-3695-NR

- Standard types w/ 7 ³/₁₆" (183 mm) retracted length
- Larger, square backplate: 5 ³/₈" (136 mm) H x 5 ³/₈" (136 mm) W
- Interchangeable between retractable and non-retractable
- Straight (3690) or bent (3695) handle
- Spring-loaded latch included

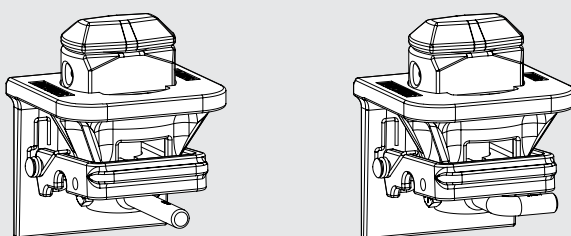


1101-3837-R
1101-3837-NR

1101-3843-R
1101-3843-NR


- Shorter retracted length: 6 ³/₈" (163 mm)
- Larger, square backplate: 5 ³/₈" (136 mm) H x 5 ³/₈" (136 mm) W
- Interchangeable between retractable and non-retractable
- Straight (3837) or bent (3843) handle
- Spring-loaded latch included

CHASSIS Non-Retractable Twistlocks w/o Light Holes

No left or right models, all **Non-Retractable (NR)**:



1101-3634-NR



1101-3624-NR


- Standard backplate: 4 ⁹/₁₆" (116 mm) H x 4 ³/₄" (120 mm) W
- Non-retractable ONLY
- Straight (3634) or bent (3624) handle
- Spring-loaded latch included

PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See our Chassis Catalog, Section 1108 for latches that may work for your application.




CHASSIS Drop-In Twistlocks w/ 70° handle rotation

All **Non-Retractable** models:



1102-1257-R


Front Roadside/Rear Curbside



1102-1257-L

Front Curbside/Rear Roadside


- Standard locking clearance
- Dual grease fittings
- Weld chamfer on housing
- Designed to hang straight for welding



1102-3027


Non-sided

- Compact design that can fit directly over pinlocks on front bolster of combo chassis
- Dual grease fittings
- Weld chamfer on housing
- Designed to hang straight for welding



1102-3257-R


Front Roadside/Rear Curbside



1102-3257-L


Front Curbside/Rear Roadside

- Same as 1102-1257-L/-R except for longer handle
- Standard locking clearance



1102-3247-R


Front Roadside/Rear Curbside



1102-3247-L


Front Curbside/Rear Roadside

- J.B. Hunt-style for thin flange container fittings
- Does not lock over standard ISO corner fitting
- Dual grease fittings



1102-3248-R


Front Roadside/Rear Curbside



1102-3248-L


Front Curbside/Rear Roadside

- J.B. Hunt-style for thin flange container fittings
- Same as 1102-3247-L/-R except for longer handle



1102-3557-R

Front Roadside/Rear Curbside



1102-3557-L


Front Curbside/Rear Roadside

- Approved for use on Maersk chassis
- Standard locking clearance
- Dual grease fittings
- Weld chamfer on housing
- Designed to hang straight for welding
- High cone design


WE'VE GOT YOU COVERED WITH THE PARTS YOU NEED

CHASSIS Drop-In Twistlocks w/ 90° handle rotation

All **Non-Retractable** models:



- Standard locking clearance
- Dual grease fittings
- Weld chamfer on housing
- Designed to hang straight for welding
- Handle in locked position $3\frac{3}{16}"$ (81 mm) outside pin center




1102-1259-R


Front Roadside/Rear Curbside

1102-1259-L

Front Curbside/Rear Roadside



- Same as 1102-1259-L/-R except for low-profile pin head for shallow container fittings




1102-3259-R


Front Roadside/Rear Curbside

1102-3259-L

Front Curbside/Rear Roadside



- Standard locking clearance
- Dual grease fittings
- Handle designed for narrow bolsters w/ limited space
- Handle in locked position $1\frac{5}{8}"$ (41 mm) outside pin center




1102-3229-R

Front Roadside/Rear Curbside

1102-3229-L

Front Curbside/Rear Roadside




- Same as 1102-1259-L/-R except for straight handle
- Non-handed


1102-3258

Front Roadside/Rear Curbside

PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See our Chassis Catalog, Section 1108 for latches that may work for your application.



- Same as 1102-1259-L/-R except for high cone on pin head




1102-3559-R


Front Roadside/Rear Curbside

1102-3559-L

Front Curbside/Rear Roadside



- Same as 1102-1259-L/-R except for handle that is $2\frac{3}{8}"$ (61 mm) outside pin center when locked




1102-3261-R


Front Roadside/Rear Curbside

1102-3261-L

Front Curbside/Rear Roadside



- Same as 1102-3261-L/-R except for low-profile pin head for shallow container fittings




1102-3260-R


Front Roadside/Rear Curbside

1102-3260-L

Front Curbside/Rear Roadside



- Same as 1102-3261-L/-R except for high cone on pin head




1102-3262-R

Front Roadside/Rear Curbside


1102-3262-L

Front Curbside/Rear Roadside




1102-1690-R

Front Roadside/Rear Curbside



1102-1690-L

Front Curbside/Rear Roadside




1102-1691

Non-sided

- Shallow body designed for front bolsters w/ limited space
- High locking clearance
- Dual grease fittings
- Weld chamfer on housing
- Designed to hang straight for welding

CHASSIS Screwdown Twistlocks w/o Light Holes

No left or right models. **Retractable (RS)** models can be made **Non-Retractable (NRS)** by adding a bushing:




1101-3629-RS 1101-3629-NRS

- Screwdown feature to eliminate play under pin head and increase clamp strength
- Interchangeable between retractable and non-retractable
- Standard backplate: 4 ⁹/₁₆" (116 mm) H x 4 ³/₄" (120 mm) W
- Retracted length: 9 ¹/₁₆" (230 mm)
- Spring-loaded latch included
- Wrench tool 1111-8122 available for Hand Nut



1111-8122




1101-3829-NRS 1101-3829-NRS-HDG

- Screwdown feature to eliminate play under pin head and increase clamp strength
- Only offered as non-retractable screwdown (NRS)
- Standard backplate: 4 ⁹/₁₆" (116 mm) H x 4 ³/₄" (120 mm) W
- Spring-loaded latch included
- Wrench tool 1111-8122 available for Hand Nut
- Galvanized (HDG) version also available: 1101-3829-NRS-HDG

FLATBED Screwdown Twistlock

No left or right models. **Retractable (RS)**:



1101-3729-RS


- Screwdown feature to eliminate play under pin head and increase clamp strength
- Square top plate for easy weld-in
- Standard backplate: 4 ⁹/₁₆" (116 mm) H x 4 ³/₄" (120 mm) W
- Retracted length: 9 ³/₈" (239 mm)
- Spring-loaded latch included
- Wrench tool 1111-8122 available for Hand Nut



1111-8122

FLATBED Height Extender Twistlock

Non-Retractable:




1101-2959

- Used on double-drop decks to improve cargo-carrying capability
- Locks down on flatbed twistlock
- Gives 6" (152 mm) height extension:
Designed to bridge the 6" difference in deck height from the main drop level to the level over the rear axles
- Portable for easy storage & transport
- Heavy duty & galvanized

FLATBED Twistlocks – Various Models

No left or right models. All **Retractable (R)** or **Retractable Screwdown (RS)**:




Locked pin position

1101-1132



- Flat housing sides for transversal bracing
- Left- or right-locking; set by internal handle positioner
- Low weight: 13.5 lbs. / 6.12 Kg
- Models also available w/ extended handles up to 2³/₄" / 70mm down
- Requires external latch (not included)

PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See our **Trailer Catalog, Section 1108** for latches that may work for your application.

Model 1101-1132-OS28 w/ 1-1/8" / 28mm Ext. Handle




Model 1101-1132-OS70 w/ 2-3/4" / 70mm Ext. Handle




Ready to load position

1101-3532



- Rectangular housing for easy bracing
- Left- or right-locking; set by internal handle positioner
- Models also available w/ extended handles up to 2³/₄" / 70mm down
- Requires external latch (not included)
- 3", 4", 5" & 6" handle extensions are also available:

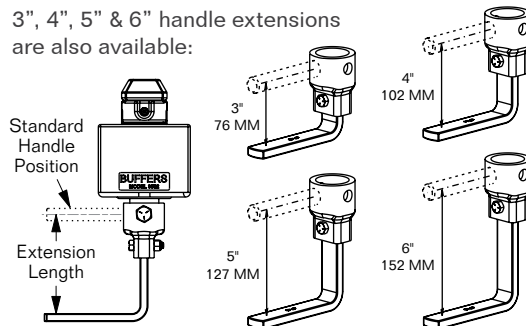

Model 1101-3532-OS35 w/ 1-3/8" / 35mm Ext. Handle




Model 1101-3532-OS70 w/ 2-3/4" / 70mm Ext. Handle

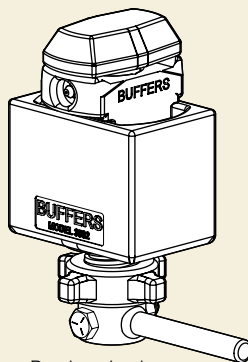


Ready to load position

1101-3539-RS

- Screwdown feature to eliminate play under pin head & increase clamp strength
- Left- or right-locking; set by internal handle positioner
- Wrench tool 1111-8122 available for Hand Nut
- Requires external latch (not included)
- Models also available w/ extended handles up to 6" / 152 mm down:

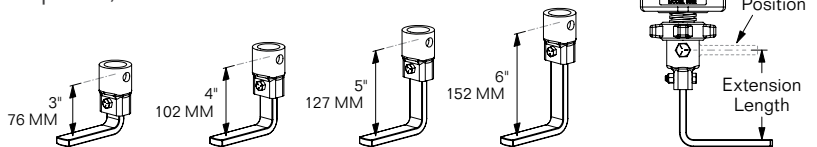


1111-8122



Ready to load position

1101-3836-R

- Short retracted length: 6¹/₄" / 159 mm
- Extended handles available up to 6" / 152 mm down
- Low weight; only 12.5 lbs. / 5.6 Kg
- Spring-loaded latch included




Locked pin position

1101-3152

- Short retracted length: only 5⁹/₁₆" / 141 mm
- Low weight; only 12.9 lbs. / 5.9 Kg
- Spring-loaded latch included


FLATBED Twistlocks – Various Models

No left or right models, all **Retractable**:




1101-3733-R & 1101-3743-R-SC/HDG

- Square top plate for easy weld-in
- Only offered as retractable
- Retracted length: 7 3/16" (183 mm) w/ standard straight handle
- Extended handles available up to 6" / 152 mm down
- Spring-loaded latch included
- 3743-R-SC/HDG has L-shaped handle, unpainted housing & galvanized components

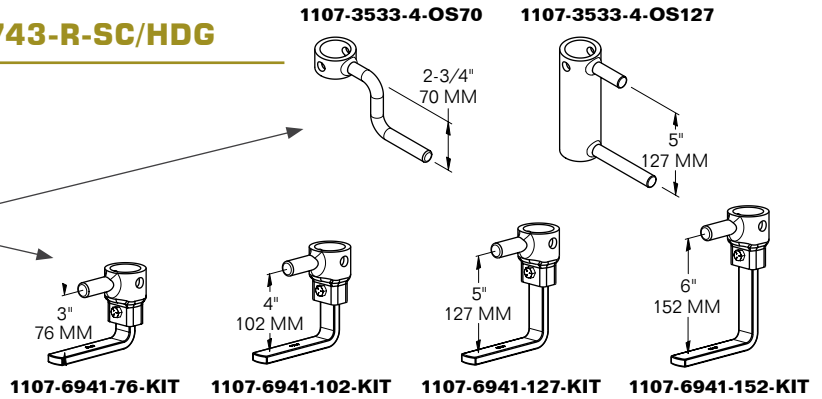


Height-Adjustable 1101-3600-HA-WL Series


- Improves loading & securing containers on flatbeds w/ camber
- Can be used as a standard retractable twistlock
- Rotate handle clockwise to extend upward (max. 3") to compensate for trailer camber
- Cast steel housing & forged steel pin
- Non-handed design locks to either left or right
- 3 grease fittings for easy operation
- Gravity latch w/ spring-loaded pull-pin control included

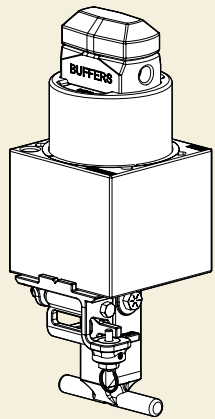


1101-3600-HA-WL-KIT w/ T-Handle & Latch

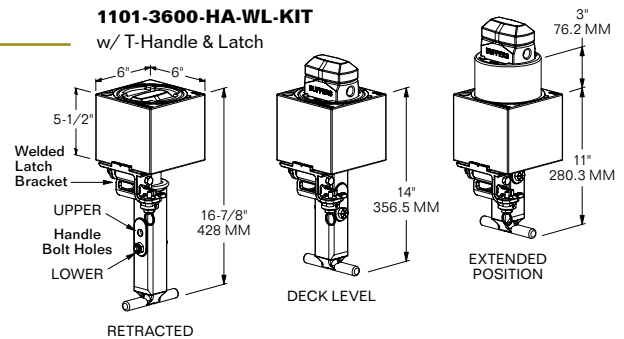

1101-3600-HA-9-WL-KIT w/ 9" Extension Tube, T-Handle & Latch

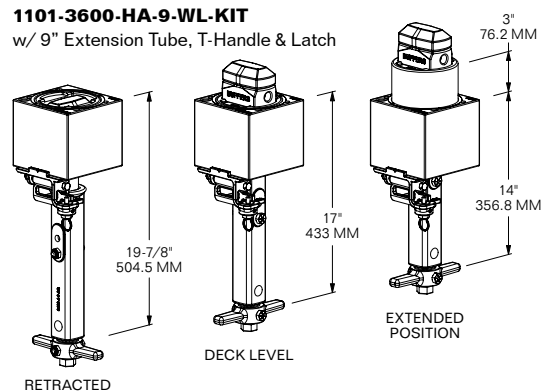


1101-3600-HA-9-NH-WL-KIT w/ 9" Extension Tube & Latch (no T-Handle)

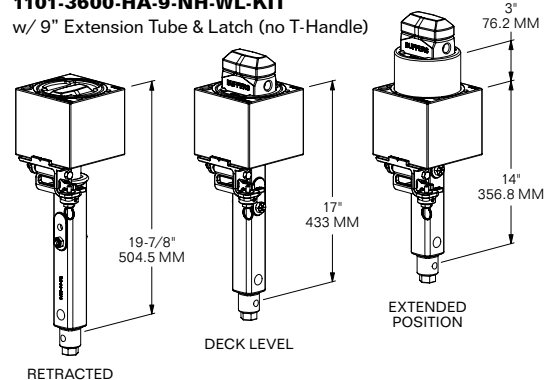

OPERATING GUIDE

1101-3600-HA-WL-KIT illustrated below:

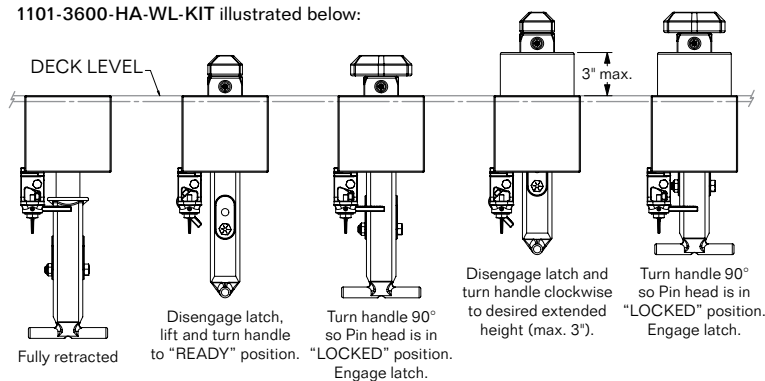

*INSTALLATION NOTES

This twistlock can be installed so that latch swings in transverse or longitudinal direction of flatbed.


FOR LONGITUDINAL LATCH OPERATION:

- Install Handle Bolt in Handle's Upper Bolt Hole
- Install Twistlock w/ Welded Latch in positions A or B

FOR TRANSVERSAL LATCH OPERATION:

- Install Handle Bolt in Handle's Lower Bolt Hole
- Install Twistlock w/ Welded Latch in positions C or D

For additional information, please do not hesitate to call our Engineering Department.

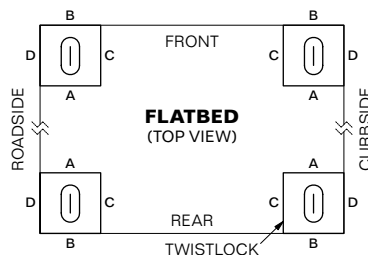

Every Order Delivers Quality, Value Pricing and Responsive Fulfillment.

ONLY BUFFERS OFFERS A 12-MONTH QUALITY WARRANTY

Covering workmanship and material on every part you purchase.

Certified C-TPAT and AAR:



904.696.0010

www BuffersUSA.com • Sales@BuffersUSA.com

10180 New Berlin Road • Jacksonville, FL 32226

BUFFERS USA

Securing Your Containers. Protecting Your Cargo.
At Sea, Over Land, On Rail.™

7410-BRO-021-E
Rev. 2024-12-19