


# 4-LEG BRIDLE WIRE ROPE SLING

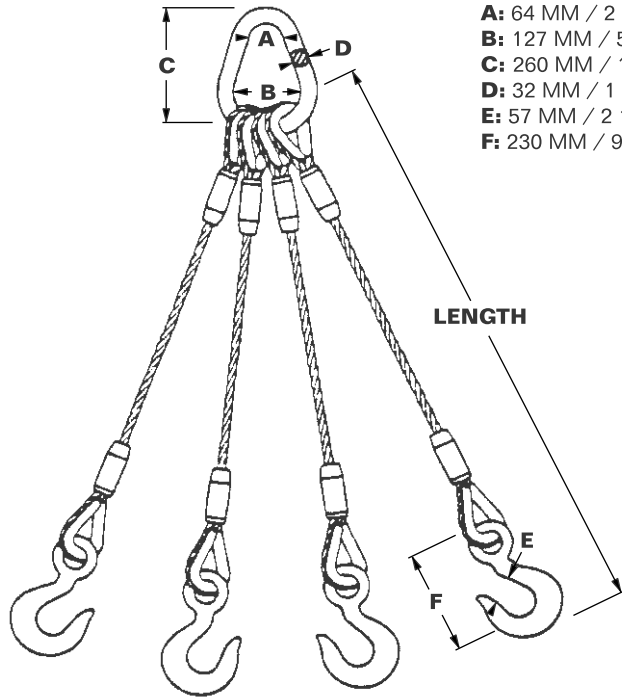

**MODEL 6103-1/2x15-4**

**A:** 64 MM / 2 1/2"  
**B:** 127 MM / 5"  
**C:** 260 MM / 10 1/4"  
**D:** 32 MM / 1 1/4"  
**E:** 57 MM / 2 1/4"  
**F:** 230 MM / 9 1/16"


**CAPACITY PER SET:** AT 45° LIFT ANGLE - 6.2 M. TON SWL  
 AT 60° LIFT ANGLE - 7.6 M. TON SWL

**BREAK LOAD:** 5 TIMES SWL

**DIMENSIONS:** 15' LEG LENGTH (GIVES APPROXIMATELY 60° LIFT ANGLE FOR 14' x 8' CONTAINER).

**HOOK:** EYE HOIST HOOK  
 7.5 M. TON, CARBON

THIMBLES FITTED BOTH ENDS.

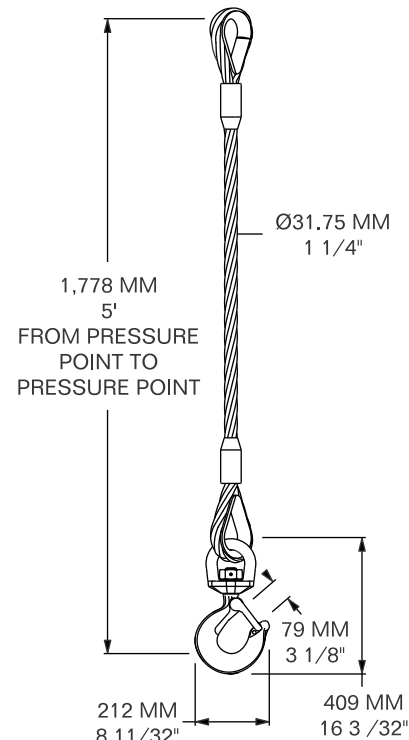

**MODEL 6103-1.25x5-H**

**5' WIRE SLING WITH THIMBLES AND SWIVEL HOOK ON ONE END**

**HOOK FITS INTO ISO CORNER CASTING**

1,778 MM  
 5'  
 FROM PRESSURE POINT TO PRESSURE POINT

Ø31.75 MM  
 1 1/4"

79 MM  
 3 1/8"

212 MM  
 8 11/32"

409 MM  
 16 3/32"

**WORKING LOAD LIMIT:** 12 M. TON

**BREAK LOAD:** 5 TIMES WORKING LOAD LIMIT

**ASSEMBLY WEIGHT:** 27.2 Kg / 60.0 LBS

**HOOK:** SWIVEL HOIST HOOK W LATCH,  
 15 M. TON, CARBON

