






MODEL 1102-1257-R
MODEL 1102-1257-L
MODEL 1102-1257-LP-R
MODEL 1102-1257-LP-L

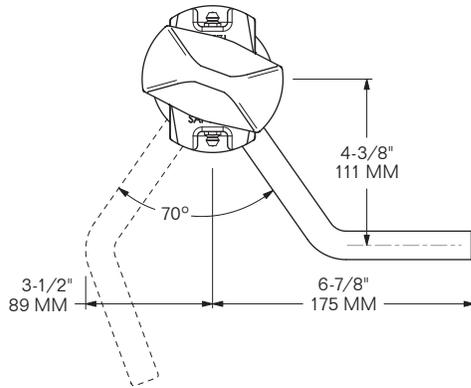


MODEL 1102-1257-R
for Front Roadside
& Rear Curbside



MODEL 1102-1257-L
for Front Curbside
& Rear Roadside

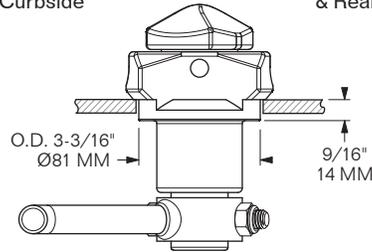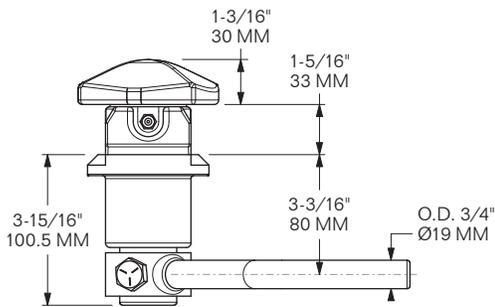

EXPLODED VIEW

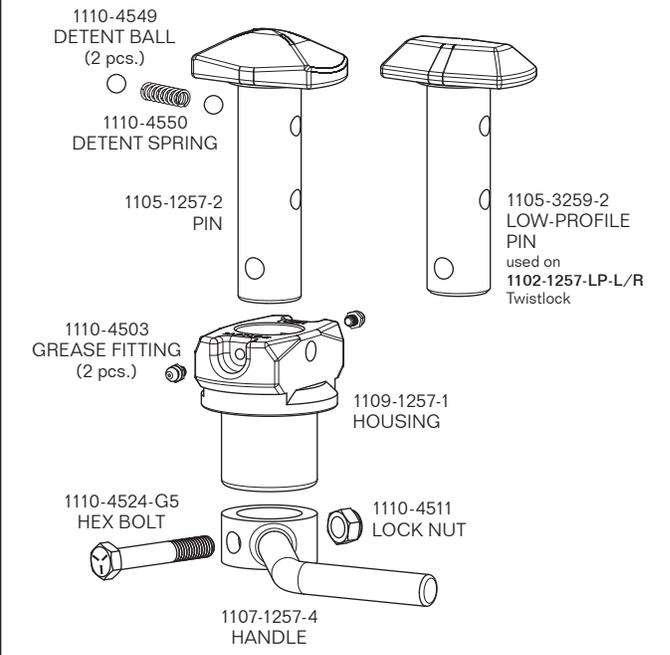





FINISH: PRIMER
WEIGHT: 9.2 LBS / 4.17 Kg

- Standard locking clearance
- Dual Grease Fittings
- Weld chamfer on Housing
- Designed to hang straight for welding


PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.

MODEL 1102-3027

Non-handed

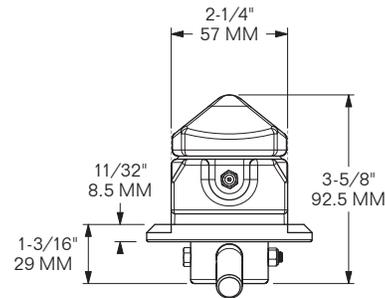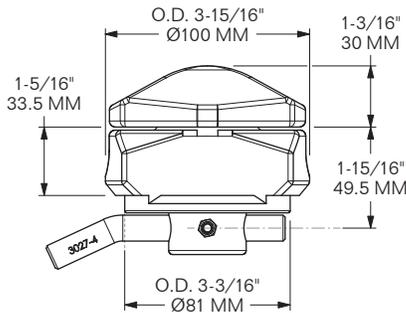

EXPLODED VIEW

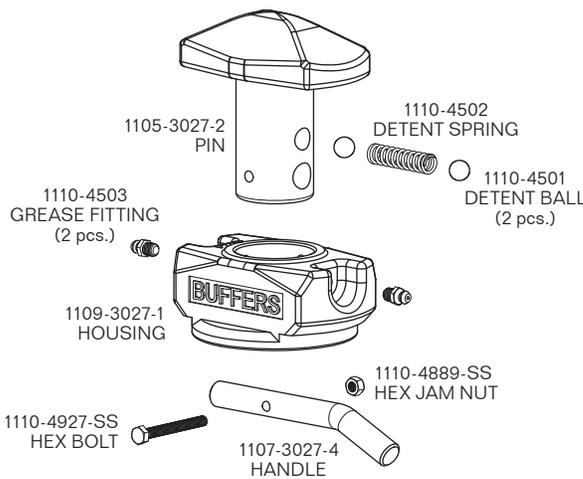

FINISH: PRIMER
WEIGHT: 5.5 LBS / 2.5 Kg



- Compact design which can fit directly over pinlocks on front bolster of combo chassis
- Dual Grease Fittings
- Weld chamfer on Housing
- Designed to hang straight for welding

PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.


MODEL 1102-3247-R

MODEL 1102-3247-L



J.B. Hunt style

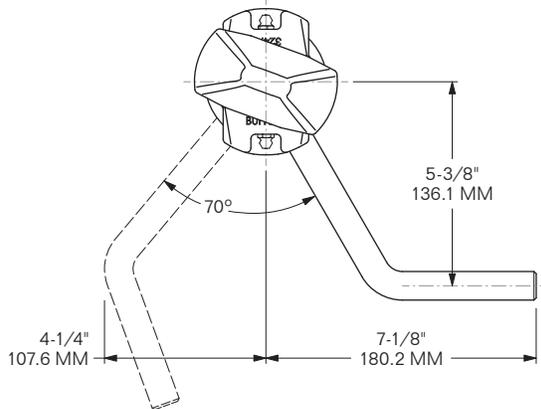


MODEL 1102-3247-R
for Front Roadside
& Rear Curbside



MODEL 1102-3247-L
for Front Curbside
& Rear Roadside

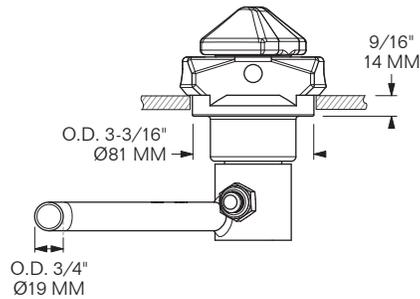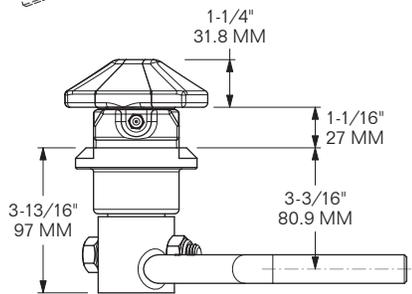




EXPLODED VIEW

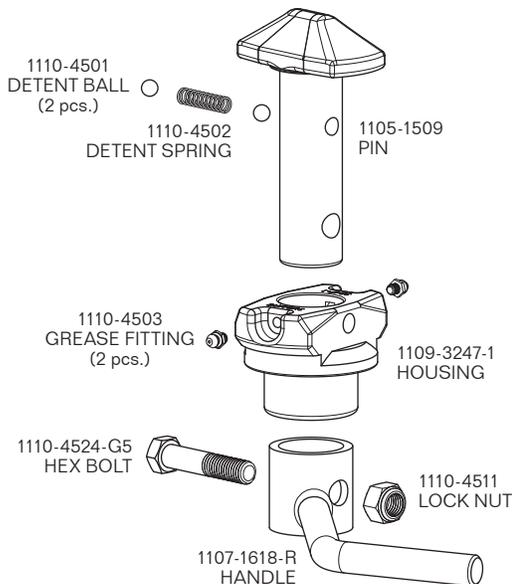

FINISH: PRIMER
WEIGHT: 8.38 LBS / 3.8 Kg

- J.B. Hunt style for Thin Flange Container Fittings
- Does not lock over standard ISO Corner Fitting
- Dual Grease Fittings


PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.

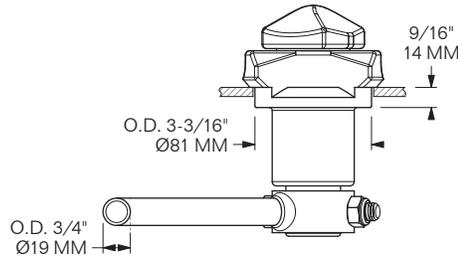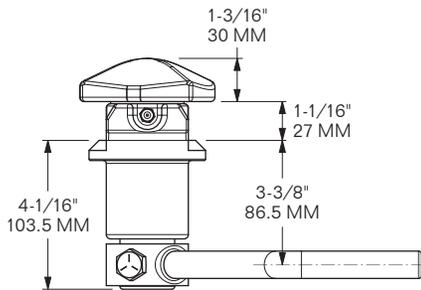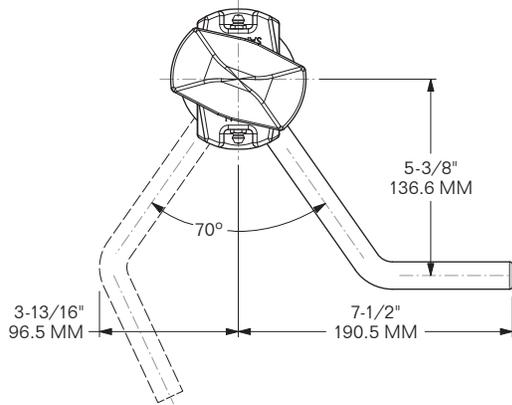

MODEL 1102-3248-R

MODEL 1102-3248-L


J.B. Hunt style

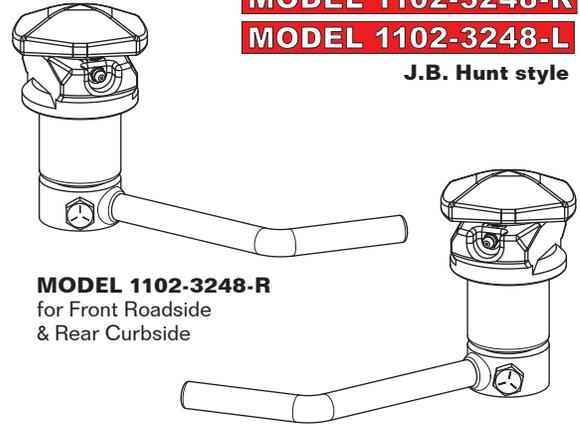

MODEL 1102-3248-R
for Front Roadside
& Rear Curbside

MODEL 1102-3248-L
for Front Curbside
& Rear Roadside


EXPLODED VIEW

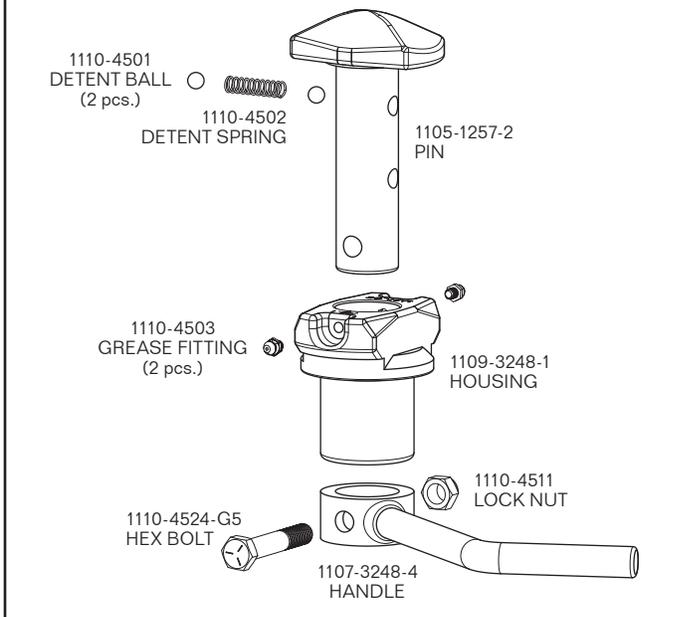


FINISH: PRIMER
WEIGHT: 9.48 LBS / 4.3 Kg

- J.B. Hunt style for Thin Flange Container Fittings
- Does not lock over standard ISO Corner Fitting
- Dual Grease Fittings


PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.

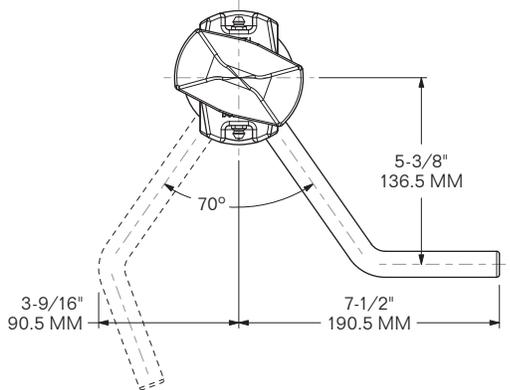




MODEL 1102-3257-R
MODEL 1102-3257-L



MODEL 1102-3257-R
 for Front Roadside
 & Rear Curbside



MODEL 1102-3257-L
 for Front Curbside
 & Rear Roadside

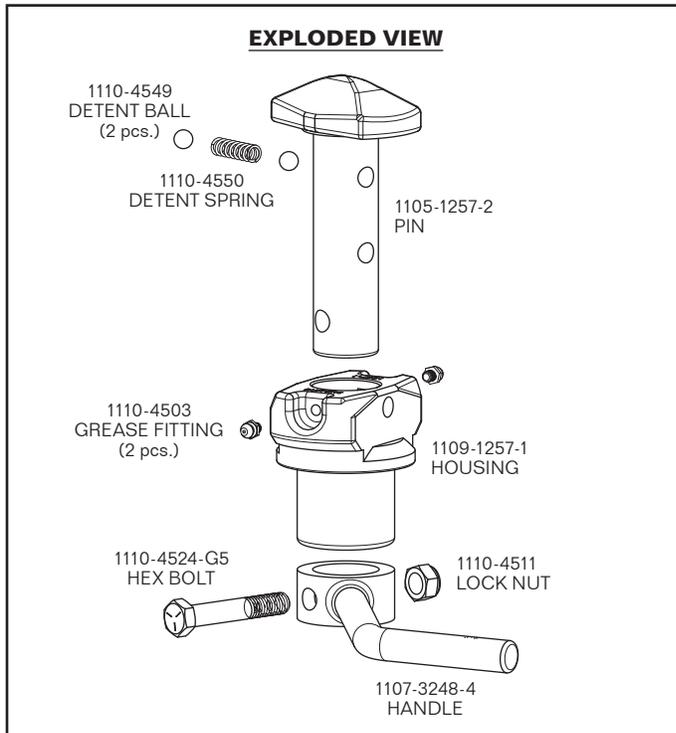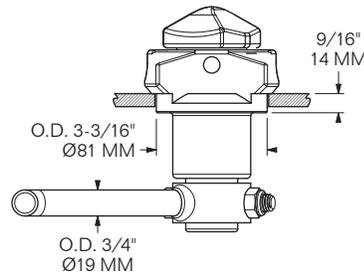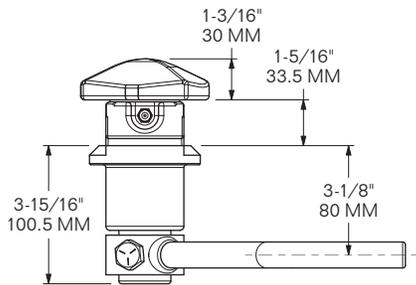




FINISH: PRIMER
WEIGHT: 8.45 LBS / 3.83 Kg

- Same as 1102-1257-L/-R except for longer handle
- Standard locking clearance
- Dual Grease Fittings
- Weld chamfer on Housing
- Designed to hang straight for welding


PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.

MODEL 1102-3267-R

MODEL 1102-3267-L

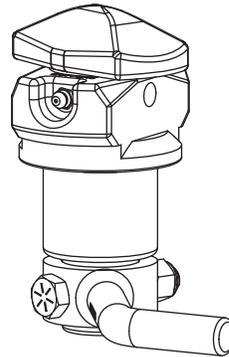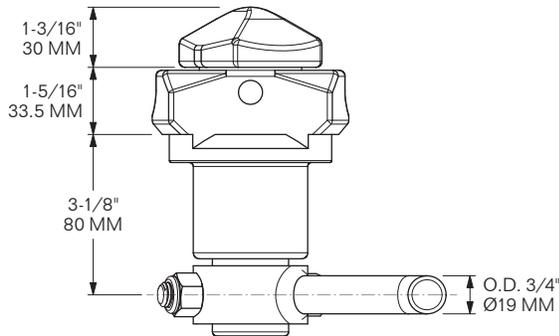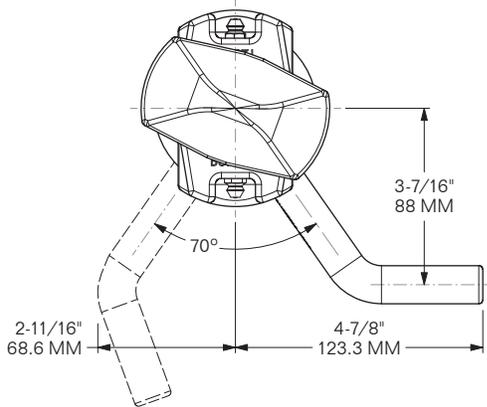


MODEL 1102-3267-R
for Front Roadside
& Rear Curbside

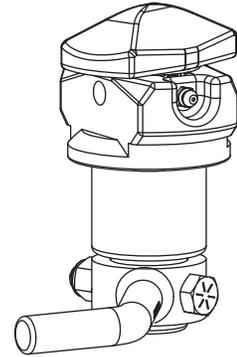

MODEL 1102-3267-L
for Front Curbside
& Rear Roadside




EXPLODED VIEW

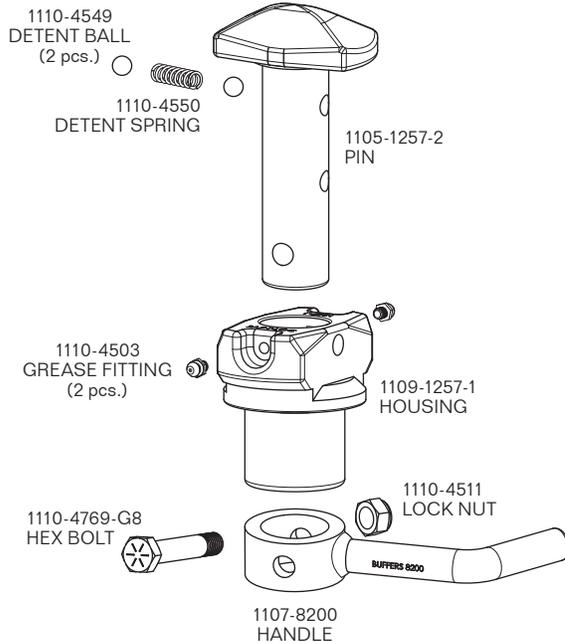


FINISH: WELDABLE PRIMER
WEIGHT: 9.3 LBS / 4.2 Kg

- Standard locking clearance
- Dual Grease Fittings
- Weld chamfer on Housing
- Designed to hang straight for welding
- Approved for use on Maersk chassis


PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.

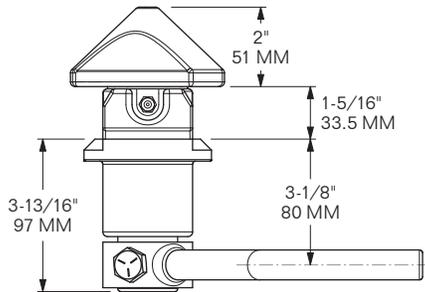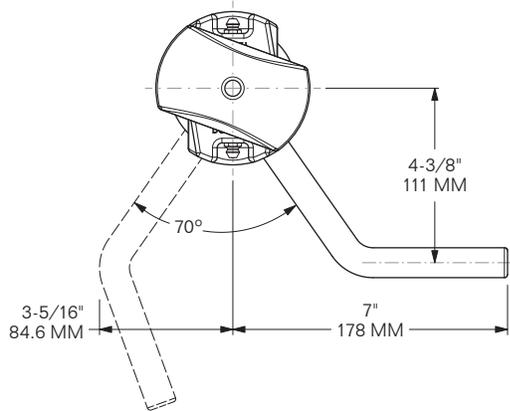


MODEL 1102-3557-R
for Front Roadside
& Rear Curbside



MODEL 1102-3557-L
for Front Curbside
& Rear Roadside

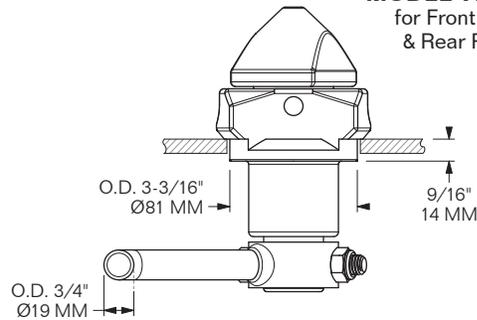

EXPLODED VIEW

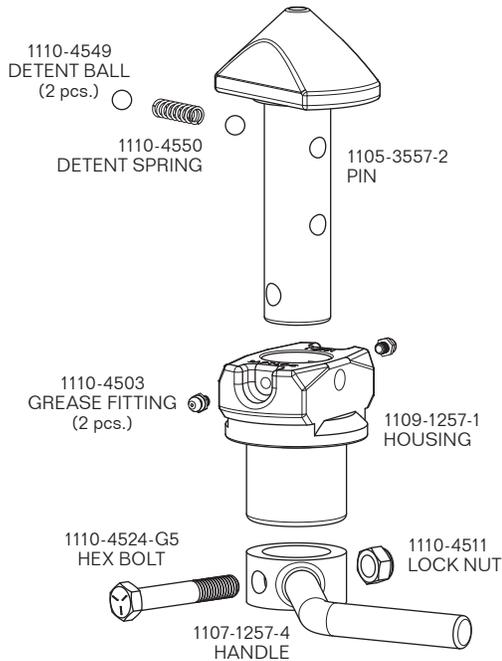



FINISH: PRIMER
WEIGHT: 10.6 LBS / 4.81 Kg

- Standard locking clearance
- Dual Grease Fittings
- Weld chamfer on Housing
- Designed to hang straight for welding
- Approved for use on Maersk chassis
- High Cone design


PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.

MODEL 1102-1259-R



MODEL 1102-1259-L

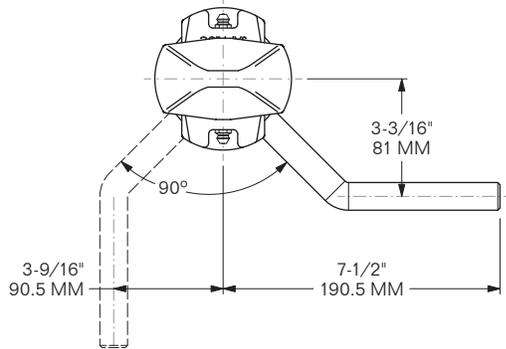


MODEL 1102-1259-R
 for Front Roadside
 & Rear Curbside



MODEL 1102-1259-L
 for Front Curbside
 & Rear Roadside

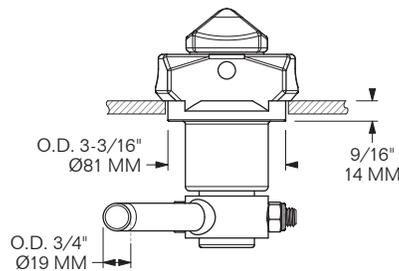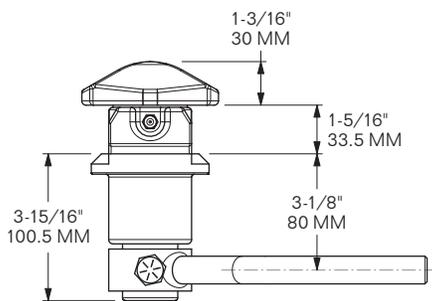

EXPLODED VIEW



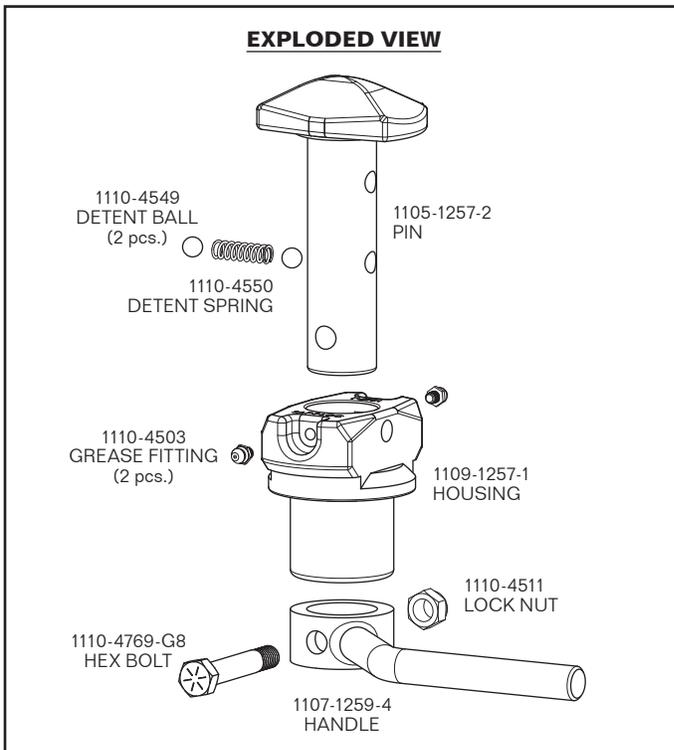


FINISH: PRIMER
WEIGHT: 9 LBS / 4.08 Kg

- Standard locking clearance
- Dual Grease Fittings
- Weld chamfer on Housing
- Designed to hang straight for welding



PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.

MODEL 1102-1690-R
MODEL 1102-1690-L

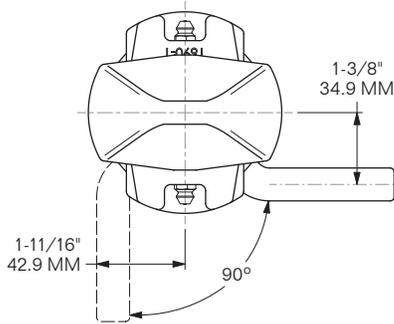


MODEL 1102-1690-R
for Front Bolster, Roadside

MODEL 1102-1690-L
for Front Bolster, Curbside

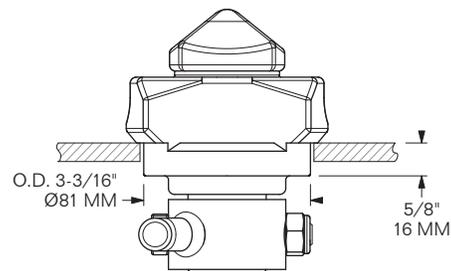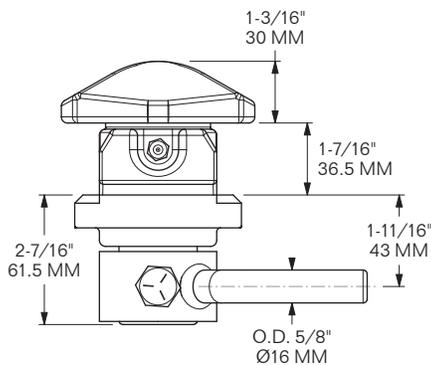

EXPLODED VIEW

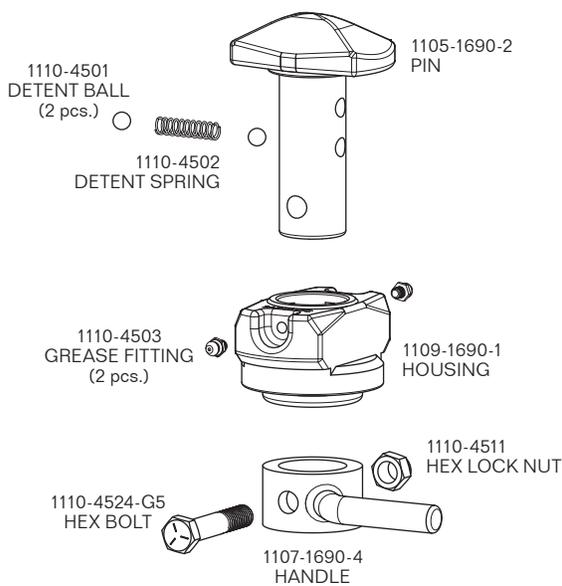


FINISH: PRIMER
WEIGHT: 7.5 LBS / 3.4 Kg

- Designed for Front Bolsters w/ limited space
- High locking clearance
- Dual Grease Fittings
- Weld chamfer on Housing
- Designed to hang straight for welding

PLEASE NOTE: This Twistlock is **NOT** supplied with an integral handle latch. Our Model 1108-9033 Safety Latch is specifically designed for this Twistlock; find details on catalog page 1108-18.





MODEL 1108-9033

SAFETY LATCH ASSEMBLY

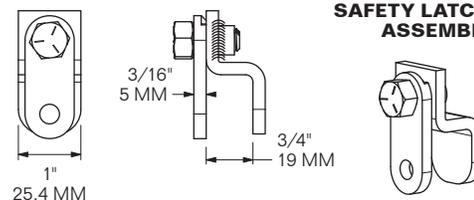


MATERIAL: STEEL FINISH: ZINC-PLATED
WEIGHT: 0.22 LBS / 0.1 Kg

SPECIAL ORDER ONLY **MODEL 1102-1691**

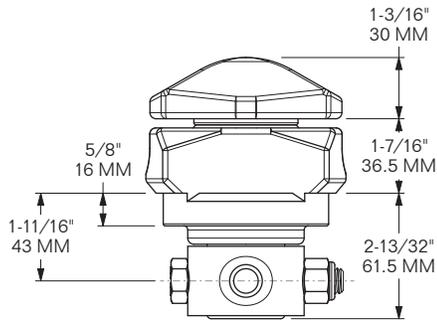

EXPLODED VIEW

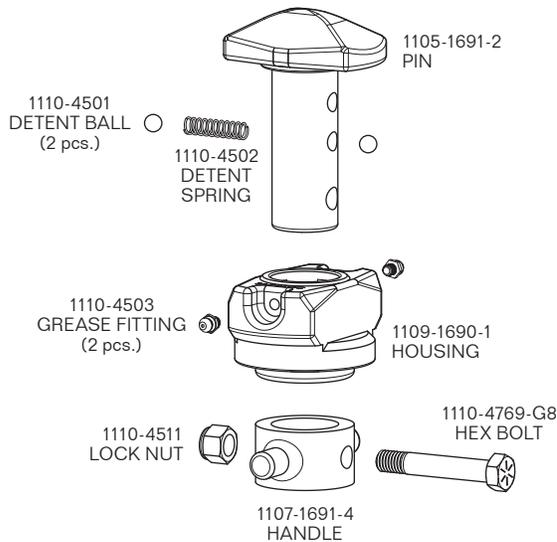



FINISH: PRIMER
WEIGHT: 7.57 LBS / 3.43 Kg

- Designed for Front Bolsters w/ limited space
- High locking clearance
- Dual Grease Fittings
- Weld chamfer on Housing
- Designed to hang straight for welding


PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.

MODEL 1102-3229-R



MODEL 1102-3229-L

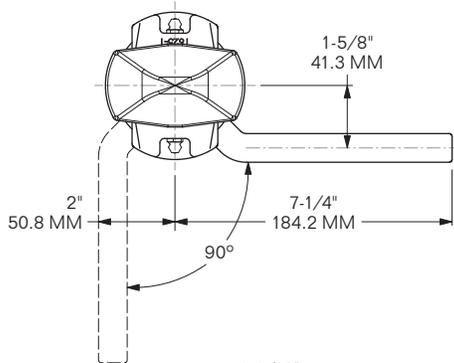


MODEL 1102-3229-R
for Front Roadside
& Rear Curbside



MODEL 1102-3229-L
for Front Curbside
& Rear Roadside

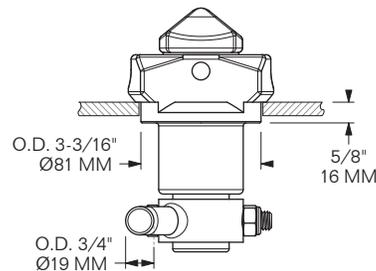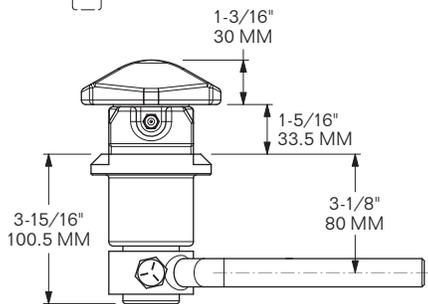

EXPLODED VIEW




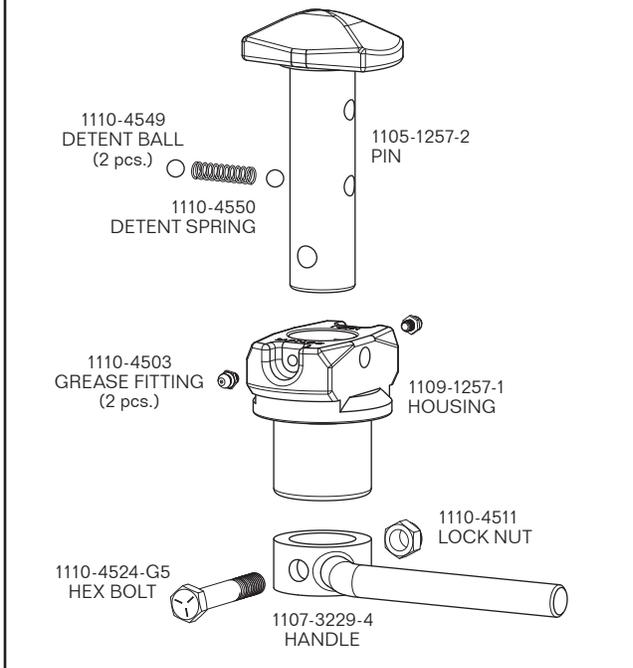


FINISH: PRIMER
WEIGHT: 9.15 LBS / 4.15 Kg


- Standard locking clearance
- Dual Grease Fittings
- Handle designed for Narrow Bolsters w/ limited space

PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.

MODEL 1102-3258

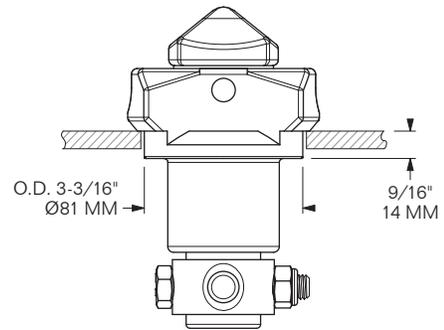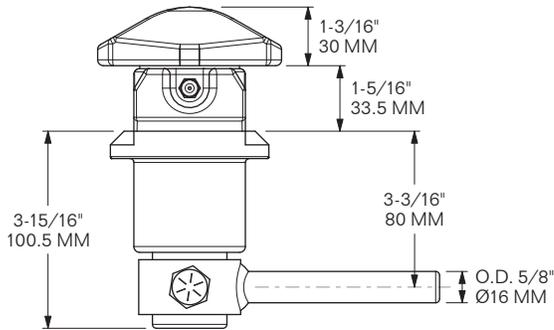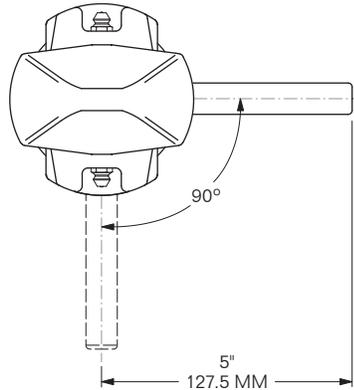

EXPLODED VIEW

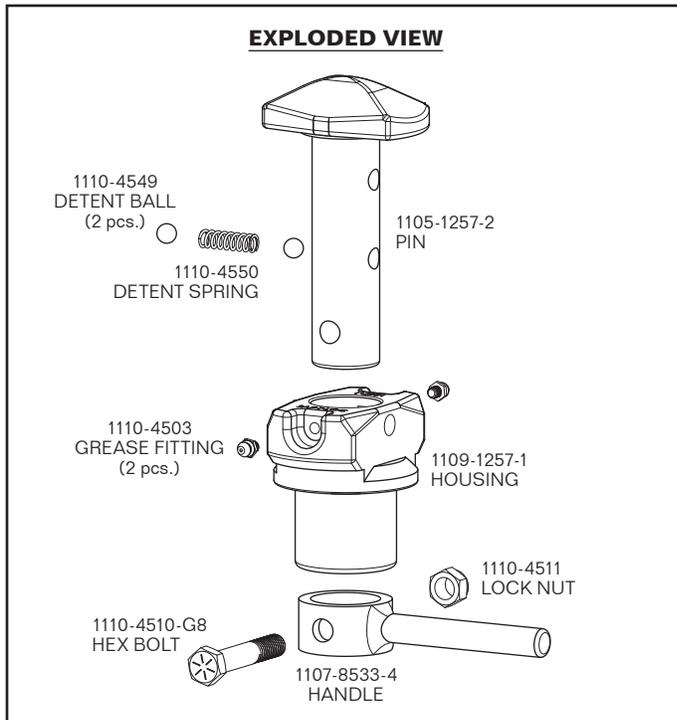



FINISH: PRIMER
WEIGHT: 8.28 LBS / 3.76 Kg

- Standard locking clearance
- Dual Grease Fittings
- Weld chamfer on Housing
- Designed to hang straight for welding


PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.

MODEL 1102-3259-R



MODEL 1102-3259-L

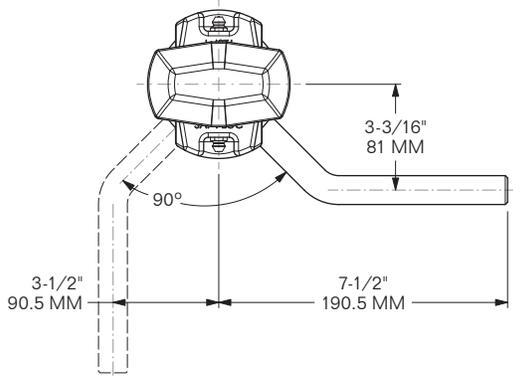


MODEL 1102-3259-R
for Front Roadside
& Rear Curbside



MODEL 1102-3259-L
for Front Curbside
& Rear Roadside

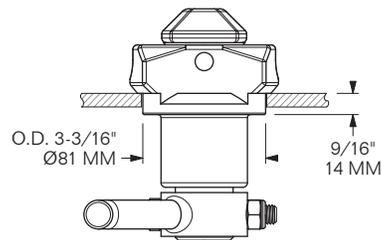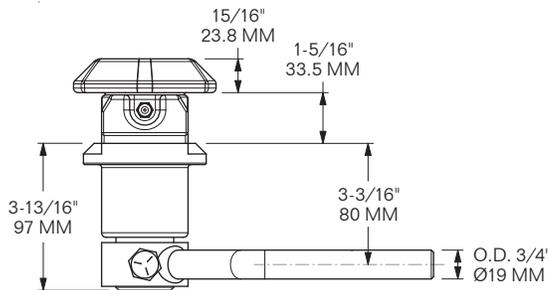

EXPLODED VIEW

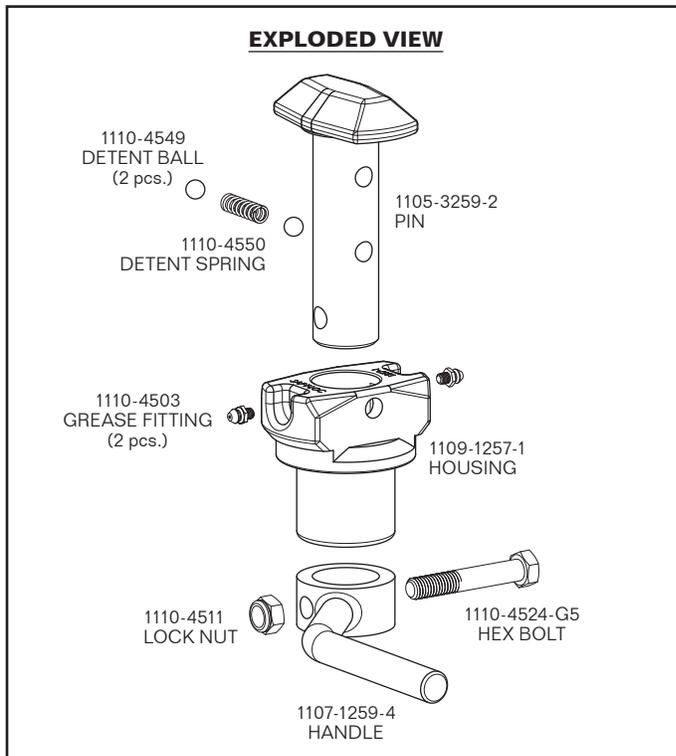



FINISH: PRIMER
WEIGHT: 8.78 LBS / 3.98 Kg

- Standard locking clearance
- Low-profile Head for shallow Container Fittings
- Dual Grease Fittings
- Weld chamfer on Housing
- Designed to hang straight for welding


PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.

MODEL 1102-3260-R



MODEL 1102-3260-L

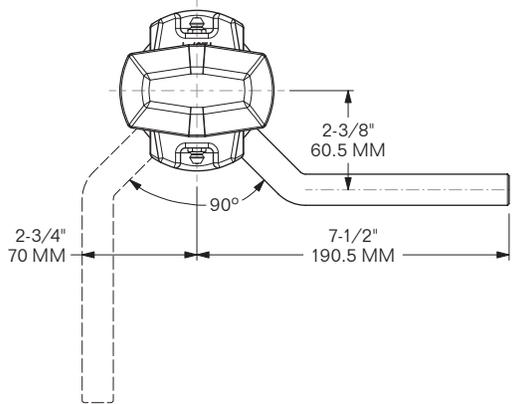


MODEL 1102-3260-R
for Front Roadside
& Rear Curbside



MODEL 1102-3260-L
for Front Curbside
& Rear Roadside

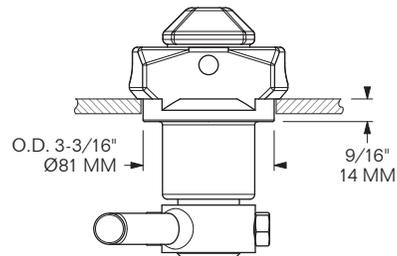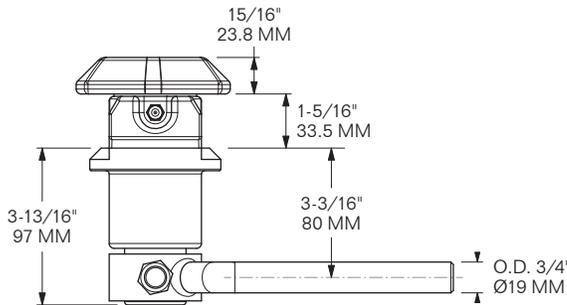

EXPLODED VIEW

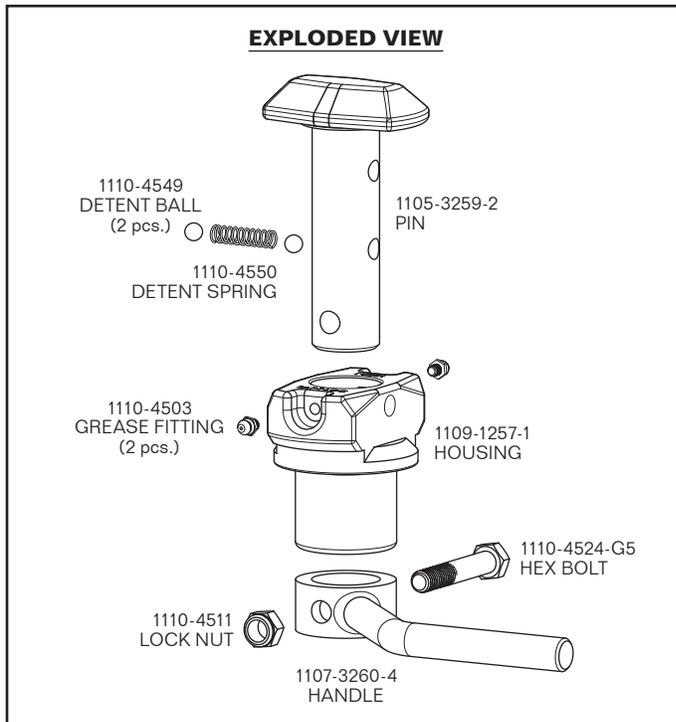




FINISH: PRIMER
WEIGHT: 9.5 LBS / 4.31 Kg

- Standard locking clearance
- Low-profile Head for shallow Container Fittings
- Dual Grease Fittings
- Weld chamfer on Housing
- Designed to hang straight for welding

PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.



MODEL 1102-3261-R

MODEL 1102-3261-L

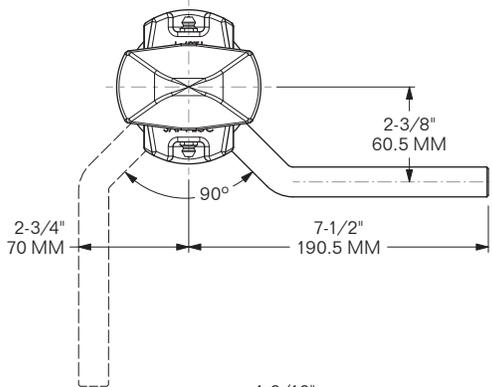


MODEL 1102-3261-R
for Front Roadside
& Rear Curbside

MODEL 1102-3261-L
for Front Curbside
& Rear Roadside

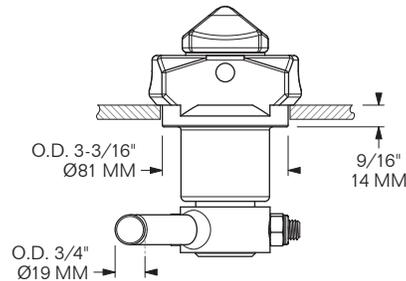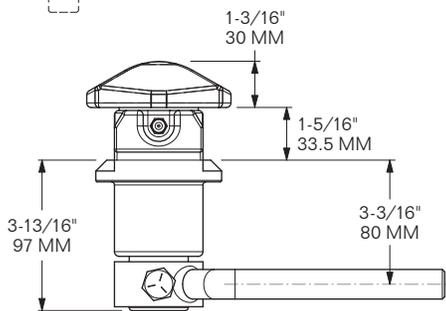

MODEL 1102-3261-R SHOWN DIMENSIONED
MODEL 1102-3261-L IS MIRROR OPPOSITE




EXPLODED VIEW

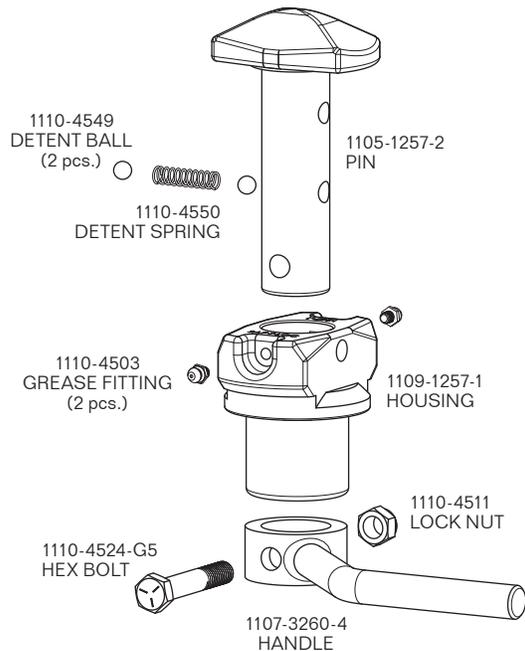

FINISH: WELDABLE PRIMER
WEIGHT: 9 LBS / 4.08 Kg


- Standard locking clearance
- Dual Grease Fittings
- Weld chamfer on Housing
- Designed to hang straight for welding

PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.

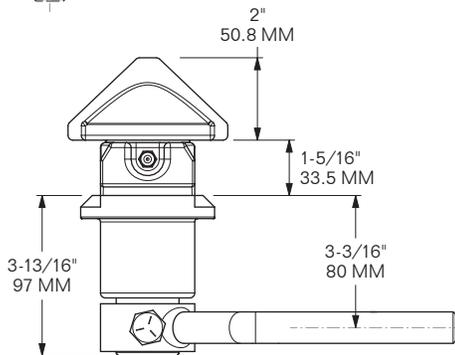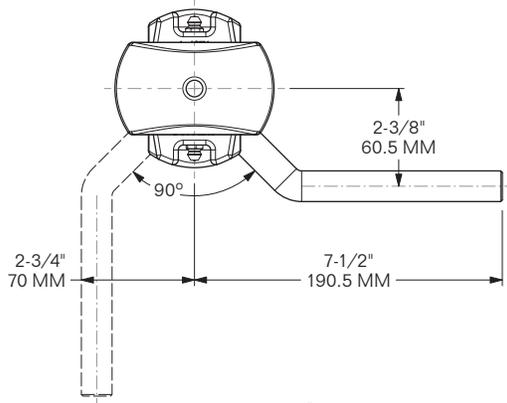


MODEL 1102-3262-R
for Front Roadside
& Rear Curbside

MODEL 1102-3262-R
MODEL 1102-3262-L




MODEL 1102-3262-L
for Front Curbside
& Rear Roadside

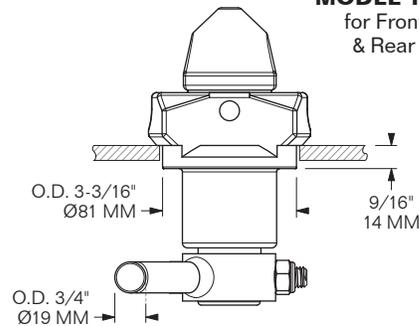


FINISH: PRIMER
WEIGHT: 10.27 LBS / 4.66 Kg

EXPLODED VIEW


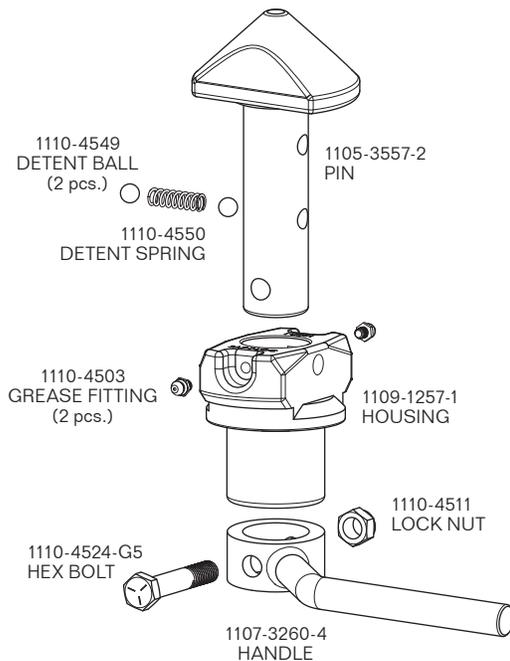


- Standard locking clearance
- Dual Grease Fittings
- Weld chamfer on Housing
- Designed to hang straight for welding
- High Cone design

PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.

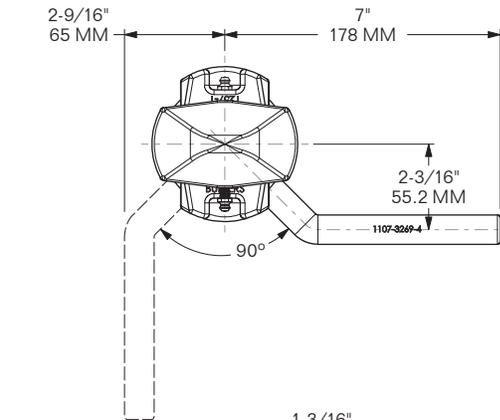


MODEL 1102-3269-R
MODEL 1102-3269-L




MODEL 1102-3269-R
for Front Roadside
& Rear Curbside

MODEL 1102-3269-L
for Front Curbside
& Rear Roadside

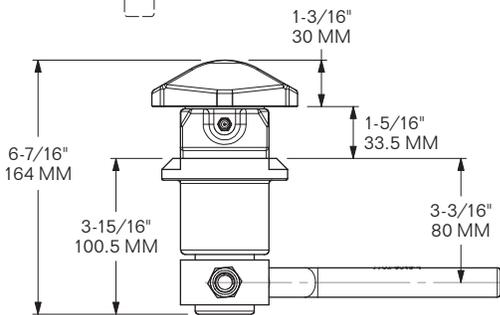


1102-3269-R SHOWN DIMENSIONED
MODEL 1102-3269-L IS MIRROR OPPOSITE.

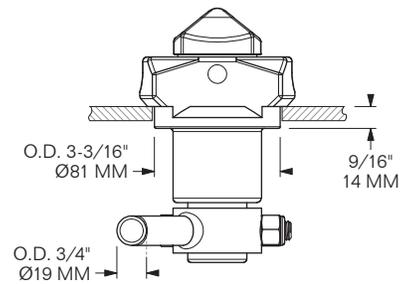

FINISH: WELDABLE PRIMER
WEIGHT: 9.26 LBS / 4.2 Kg

EXPLODED VIEW


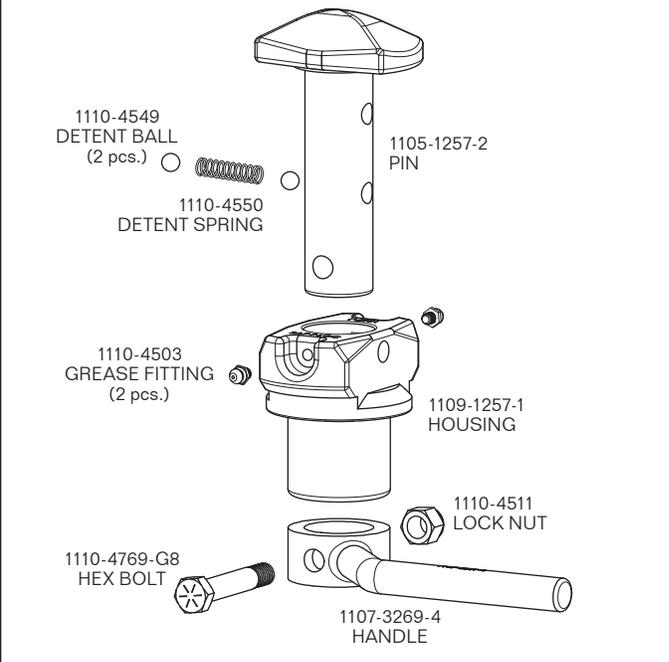


- Same as 1102-1259 Twistlocks except for Handle to Pin c/c
- Standard locking clearance
- Dual Grease Fittings
- Weld chamfer on Housing
- Designed to hang straight for welding


PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.

MODEL 1102-3559-R



MODEL 1102-3559-L

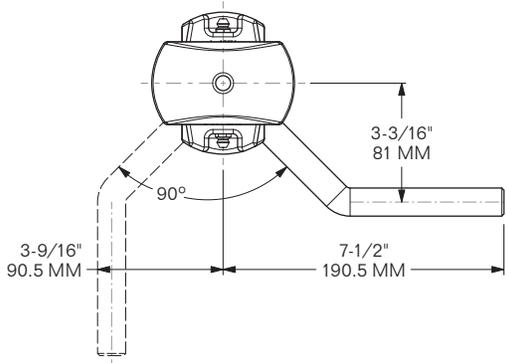


MODEL 1102-3559-R
for Front Roadside
& Rear Curbside



MODEL 1102-3559-L
for Front Curbside
& Rear Roadside

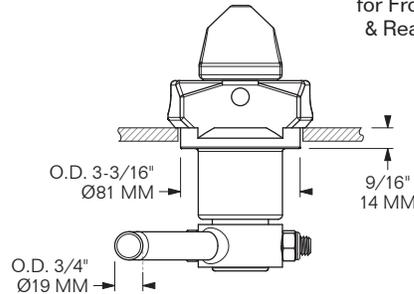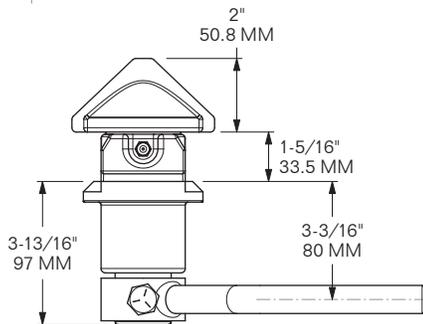

EXPLODED VIEW

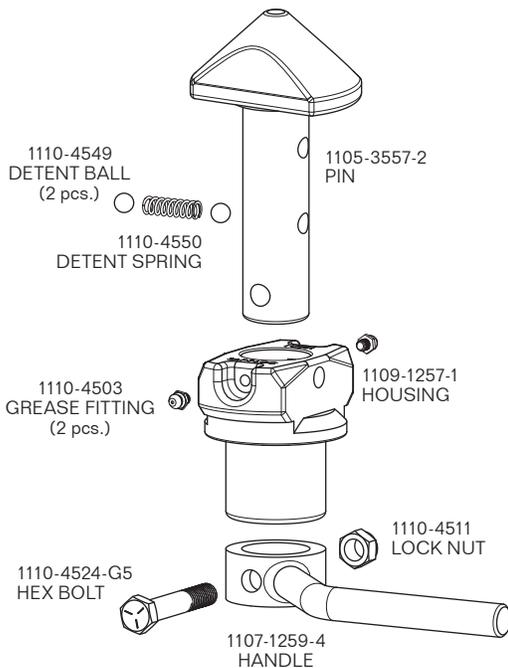


FINISH: PRIMER
WEIGHT: 10.64 LBS / 4.8 Kg

- Standard locking clearance
- Dual Grease Fittings
- Weld chamfer on Housing
- Designed to hang straight for welding
- High Cone design







PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.

MODEL 1102-3532-MOD-3/8-R

MODEL 1102-3532-MOD-3/8-L

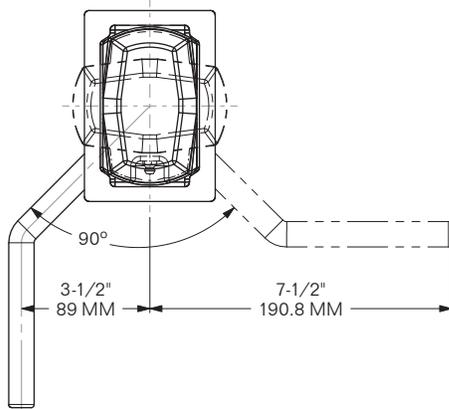

MODEL 1102-3532-MOD-3/8-R
for Front Roadside & Rear Curbside

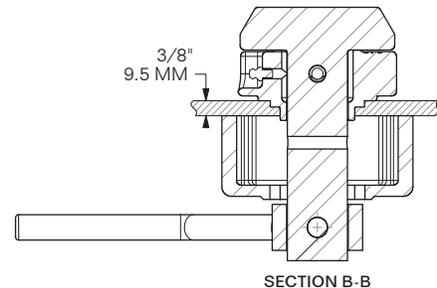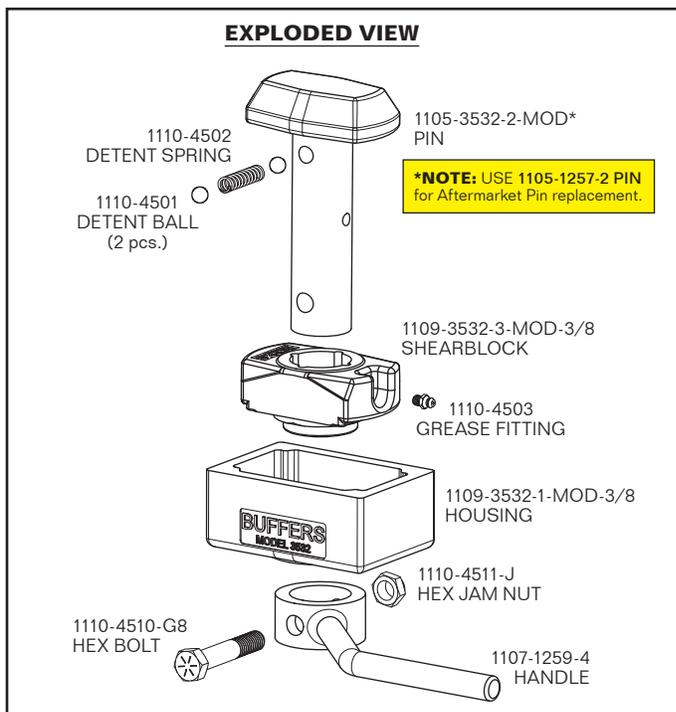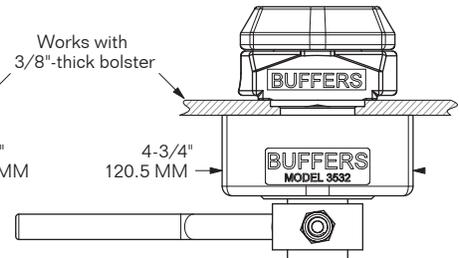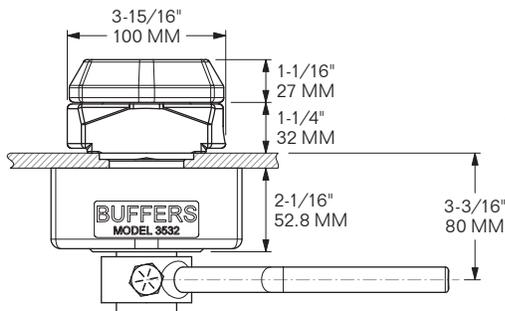
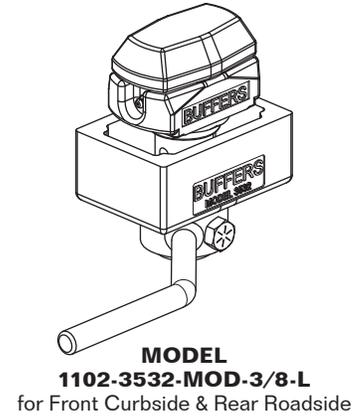


FINISH: PRIMER
WEIGHT: 12.17 LBS / 5.52 Kg


- Pin Head works with standard ISO 1161 corner fittings
- Designed for use on 20' & 40' chassis with a 3/8"-thick bolster
- Standard locking clearance

PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.






MODEL 1102-3532-MOD-3/8-LP-R
MODEL 1102-3532-MOD-3/8-LP-L

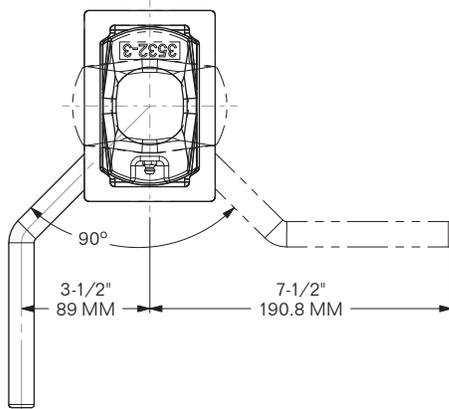

MODEL 1102-3532-MOD-3/8-LP-R
for Front Roadside & Rear Curbside



MODEL 1102-3532-MOD-3/8-LP-L
for Front Curbside & Rear Roadside

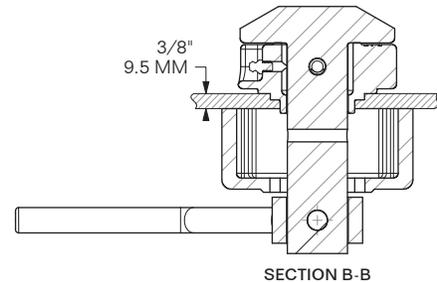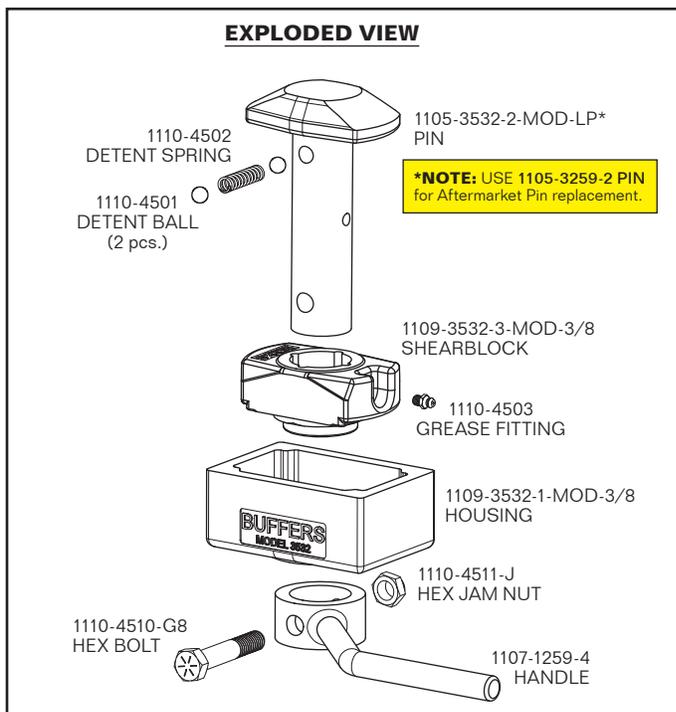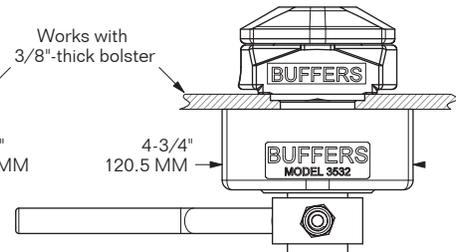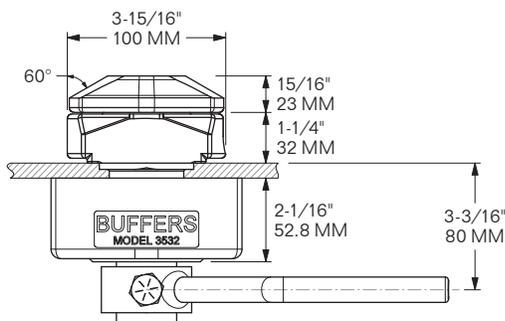

FINISH: PRIMER
WEIGHT: 11.77 LBS / 5.34 Kg

- Low-profile Pin Head works with low-clearance corner fittings on ALL 53' containers in the U.S. & Canadian markets
- Designed for use on 53' chassis with a 3/8"-thick bolster
- Standard locking clearance

PLEASE NOTE: Not all Twistlocks are supplied with an integral handle latch. All Twistlocks should be outfitted with a handle latch upon installation. See section 1108 for latches that may work for your application.