



**FINISH:**  
 SC – SELF-COLOR  
 HDG – HOT-DIP GALVANIZED  
 PR – PRIMER





### STANDARD-TYPE D-RINGS

**NOTE:** D-Ring strength for tie-down purposes only. **NOT FOR LIFTING.**

| MODEL                                       | DESC.  | FINISH | WEIGHT              | SWL                    | MBS                     | D-RING DIMENSIONS  |                    |               | STRAP DIMENSIONS  |                   |                   |                |
|---|--------|--------|---------------------|------------------------|-------------------------|--------------------|--------------------|---------------|-------------------|-------------------|-------------------|----------------|
|   |        |        |                     |                        |                         | A                  | B                  | C             | D                 | E                 | F                 | G              |
| 2902-6367-1-SC                              | D-RING | SC     | 0.62 LBS<br>0.28 Kg | 3,333 LBS<br>1,512 Kg  | 10,000 LBS<br>4,536 Kg  | 2-7/16"<br>62.4 MM | 2-7/16"<br>62.6 MM | 3/8"<br>10 MM | 1-1/2"<br>38 MM   | 3/4"<br>19 MM     | 1-1/2"<br>38 MM   | 1/4"<br>6 MM   |
| 2902-6367-2-SC                              | STRAP  | SC     | 0.2 LBS<br>0.09 Kg  |                        |                         |                    |                    |               |                   |                   |                   |                |
| 2902-7576-1-SC                              | D-RING | SC     | 1.3 LBS<br>0.59 Kg  | 6,333 LBS<br>2,873 Kg  | 19,000 LBS<br>8,618 Kg  | 4-1/4"<br>108.2 MM | 4-1/4"<br>108.2 MM | 5/8"<br>16 MM | 2-1/2"<br>63.5 MM | 1-3/16"<br>30 MM  | 1-3/4"<br>44.5 MM | 3/8"<br>9 MM   |
| 2902-7576-2-SC                              | STRAP  | SC     | 0.75 LBS<br>0.34 Kg |                        |                         |                    |                    |               |                   |                   |                   |                |
| 2902-6490-1-PR<br><b>SPECIAL ORDER ONLY</b> | D-RING | PR     | 1.64 LBS<br>0.74 Kg | 9,000 LBS<br>4,082 Kg  | 27,000 LBS<br>12,247 Kg | 4-1/2"<br>114.2 MM | 4-1/2"<br>114.2 MM | 3/4"<br>19 MM | 2-11/16"<br>68 MM | 1-3/8"<br>34 MM   | 1-7/8"<br>47 MM   | 3/8"<br>9 MM   |
| 2902-6490-2-PR                              | STRAP  | PR     | 0.94 LBS<br>0.43 Kg |                        |                         |                    |                    |               |                   |                   |                   |                |
| 2902-7399-1-HDG                             | D-RING | HDG    | 1.97 LBS<br>0.89 Kg | 14,000 LBS<br>6,350 Kg | 42,000 LBS<br>19,050 Kg | 5"<br>127 MM       | 5"<br>127 MM       | 3/4"<br>19 MM | 3-1/8"<br>80 MM   | 1-3/8"<br>34 MM   | 1-7/8"<br>47 MM   | 3/8"<br>9 MM   |
| 2902-7399-1-SC                              | D-RING | SC     | 1.97 LBS<br>0.89 Kg |                        |                         |                    |                    |               |                   |                   |                   |                |
| 2902-7399-2-SC                              | STRAP  | SC     | 0.89 LBS<br>0.4 Kg  |                        |                         |                    |                    |               |                   |                   |                   |                |
| 2902-7593-1-SC                              | D-RING | SC     | 3.06 LBS<br>1.39 Kg | 15,667 LBS<br>7,106 Kg | 47,000 LBS<br>21,319 Kg | 5"<br>127 MM       | 5"<br>127 MM       | 1"<br>25.4 MM | 2-9/16"<br>65 MM  | 1-11/16"<br>43 MM | 2-1/4"<br>56 MM   | 7/16"<br>11 MM |
| 2902-1578-2-SC                              | STRAP  | SC     | 1.2 LBS<br>0.54 Kg  |                        |                         |                    |                    |               |                   |                   |                   |                |
| 2902-1578-1-HDG                             | D-RING | HDG    | 3.25 LBS<br>1.47 Kg | 15,667 LBS<br>7,106 Kg | 47,000 LBS<br>21,319 Kg | 5"<br>127 MM       | 6"<br>152.4 MM     | 1"<br>25.4 MM | 2-9/16"<br>65 MM  | 1-11/16"<br>43 MM | 2-1/4"<br>56 MM   | 7/16"<br>11 MM |
| 2902-1578-1-SC                              | D-RING | SC     | 3.7 LBS<br>1.68 Kg  |                        |                         |                    |                    |               |                   |                   |                   |                |
| 2902-1578-2-HDG                             | STRAP  | HDG    | 1.2 LBS<br>0.54 Kg  |                        |                         |                    |                    |               |                   |                   |                   |                |
| 2902-1578-2-SC                              | STRAP  | SC     | 1.2 LBS<br>0.54 Kg  |                        |                         |                    |                    |               |                   |                   |                   |                |

**FINISH:**  
 SC – SELF-COLOR  
 ZP – ZINC-PLATED




### STANDARD-TYPE D-RINGS

**NOTE:** D-Ring strength for tie-down purposes only. **NOT FOR LIFTING.**

\*D-Ring shown w/ 2902-7669 Bolt-On Strap

| MODEL                                   | DESC.  | FINISH | WEIGHT              | SWL                   | MBS                    | D-RING DIMENSIONS |                   |                 | STRAP DIMENSIONS  |                 |                  |                |
|---|--------|--------|---------------------|-----------------------|------------------------|-------------------|-------------------|-----------------|-------------------|-----------------|------------------|----------------|
|   |        |        |                     |                       |                        | A                 | B                 | C               | D                 | E               | F                | G              |
| 2902-7668-1-ZP                          | D-RING | ZP     | 0.64 LBS<br>0.29 Kg | 3,333 LBS<br>1,512 Kg | 10,000 LBS<br>4,536 Kg | 3-1/4"<br>82.5 MM | 3-1/2"<br>88.9 MM | 1/2"<br>12.7 MM | 1-5/8"<br>41.2 MM | 7/8"<br>22.7 MM | 1-1/16"<br>27 MM | 1/4"<br>5.7 MM |
| 2902-7668-2-SC                          | STRAP  | SC     | 0.25 LBS<br>0.11 Kg |                       |                        |                   |                   |                 |                   |                 |                  |                |
| 2902-7669                               | STRAP  | ZP     | 0.4 LBS<br>0.18 Kg  | 4,100 LBS<br>1,859 Kg | 12,300 LBS<br>5,579 Kg | 3-1/4"<br>82.5 MM | 3-1/2"<br>88.9 MM | 1/2"<br>12.7 MM | 3/4"<br>45 MM     | 7/8"<br>22.7 MM | 1-1/16"<br>27 MM | 5/16"<br>7 MM  |
| 2902-8477-1-SC<br>Military applications | D-RING | SC     | 0.55 LBS<br>0.25 Kg |                       |                        |                   |                   |                 |                   |                 |                  |                |
| 2902-8477-1-ZP<br>Military applications | D-RING | ZP     | 0.55 LBS<br>0.25 Kg |                       |                        |                   |                   |                 |                   |                 |                  |                |
| 2902-8477-2-SC<br>Military applications | STRAP  | SC     | 0.35 LBS<br>0.16 Kg |                       |                        |                   |                   |                 |                   |                 |                  |                |

**FINISH:**  
 SC - Self-Color  
 HDG - Hot-Dip Galvanized  
 PR - Primer

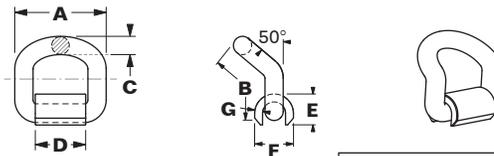


### BENT-TYPE D-RINGS

**\*NOTE:** D-Ring strengths are shown for tie-down purposes only.  
**NOT FOR LIFTING.**

| MODEL           | DESC.  | FINISH | WEIGHT              | SWL*                   | MBS*                    | D-RING DIMENSIONS |        |    | STRAP DIMENSIONS |          |        |       |       |       |       |       |
|-----------------|--------|--------|---------------------|------------------------|-------------------------|-------------------|--------|----|------------------|----------|--------|-------|-------|-------|-------|-------|
|                 |        |        |                     |                        |                         | A                 | B      | C  | D                | E        | F      | G     |       |       |       |       |
| 2902-7614-1-HDG | D-RING | HDG    | 3.54 LBS<br>1.61 Kg | 15,000 LBS<br>6,803 Kg | 45,000 LBS<br>20,411 Kg | 5"                | 5-1/2" | 1" | 2-9/16"          | 1-11/16" | 2-1/4" | 7/16" |       |       |       |       |
| 2902-1578-2-HDG | STRAP  | HDG    | 1.2 LBS<br>0.54 Kg  |                        |                         |                   |        |    |                  |          |        |       | 65 MM | 43 MM | 56 MM | 11 MM |
| 2902-1756-1-HDG | D-RING | HDG    | 3.64 LBS<br>1.65 Kg | 15,667 LBS<br>7,106 Kg | 47,000 LBS<br>21,318 Kg | 5"                | 6"     | 1" | 2-9/16"          | 1-11/16" | 2-1/4" | 7/16" |       |       |       |       |
| 2902-1756-1-SC  | D-RING | SC     | 3.69 LBS<br>1.67 Kg |                        |                         |                   |        |    |                  |          |        |       | 65 MM | 43 MM | 56 MM | 11 MM |
| 2902-1578-2-HDG | STRAP  | HDG    | 1.2 LBS<br>0.54 Kg  |                        |                         |                   |        |    |                  |          |        |       | 65 MM | 43 MM | 56 MM | 11 MM |
| 2902-1578-2-SC  | STRAP  | SC     | 1.2 LBS<br>0.54 Kg  |                        |                         |                   |        |    |                  |          |        |       | 65 MM | 43 MM | 56 MM | 11 MM |

**FINISH:**  
 SC - Self-Color  
 HDG - Hot-Dip Galvanized  
 PR - Primer

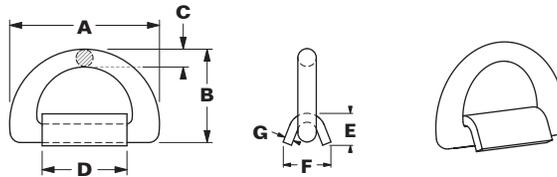

### MARINE-TYPE D-RINGS




**\*NOTE:** D-Ring strengths are shown for tie-down purposes only.  
**NOT FOR LIFTING.**

| MODEL           | DESC.  | FINISH | WEIGHT              | SWL*                    | MBS*                     | D-RING DIMENSIONS |          |        | STRAP DIMENSIONS |          |          |       |        |          |         |        |         |         |       |
|-----------------|--------|--------|---------------------|-------------------------|--------------------------|-------------------|----------|--------|------------------|----------|----------|-------|--------|----------|---------|--------|---------|---------|-------|
|                 |        |        |                     |                         |                          | A                 | B        | C      | D                | E        | F        | G     |        |          |         |        |         |         |       |
| 2902-1160-1-SC  | D-RING | SC     | 0.75 LBS<br>0.34 Kg | 0.9 M. Ton<br>2,000 LBS | 2.7 M. Ton<br>6,000 LBS  | 4-3/4"            | 2-15/16" | 9/16"  | 3-7/16"          | 1"       | 1-1/4"   | 1/4"  |        |          |         |        |         |         |       |
| 2902-1160-2-HDG | STRAP  | HDG    | 0.5 LBS<br>0.23 Kg  |                         |                          |                   |          |        |                  |          |          |       | 87 MM  | 25 MM    | 32.5 MM | 7.1 MM |         |         |       |
| 2902-1160-2-SC  | STRAP  | SC     | 0.5 LBS<br>0.23 Kg  |                         |                          |                   |          |        |                  |          |          |       | 87 MM  | 25 MM    | 32.5 MM | 7.1 MM |         |         |       |
| 5012-1854-1-HDG | D-RING | HDG    | 5.7 LBS<br>2.59 Kg  | 20.5 M. Ton             | 41 M. Ton                | 8-7/8"            | 5-7/16"  | 1"     | 4-15/16"         | 1-13/16" | 2-11/16" | 1/2"  |        |          |         |        |         |         |       |
| 5012-1854-2-HDG | STRAP  | HDG    | 2.92 LBS<br>1.32 Kg | 45,195 LBS              | 90,390 LBS               |                   |          |        |                  |          |          |       | 225 MM | 138 MM   | 25.4 MM | 126 MM | 45.8 MM | 68.7 MM | 12 MM |
| 3701-2526-1-PR  | D-RING | PR     | 5.7 LBS<br>2.58 Kg  | 25 M. Ton<br>55,115 LBS | 50 M. Ton<br>110,230 LBS | 8-3/4"            | 5-11/16" | 1"     | 4-1/2"           | 2"       | 2-3/8"   | 9/16" |        |          |         |        |         |         |       |
| 3701-2526-1-SC  | D-RING | SC     | 5.67 LBS<br>2.57 Kg |                         |                          |                   |          |        |                  |          |          |       | 222 MM | 143.8 MM | 25.4 MM | 108 MM | 50.8 MM | 60.3 MM | 15 MM |
| 3701-2526-2-PR  | STRAP  | PR     | 2.77 LBS<br>1.26 Kg |                         |                          |                   |          |        |                  |          |          |       | 222 MM | 143.8 MM | 25.4 MM | 108 MM | 50.8 MM | 60.3 MM | 15 MM |
| 3701-2526-2-SC  | STRAP  | SC     | 2.77 LBS<br>1.26 Kg |                         |                          |                   |          |        |                  |          |          |       | 222 MM | 143.8 MM | 25.4 MM | 108 MM | 50.8 MM | 60.3 MM | 15 MM |
| 5012-7092-1-PR  | D-RING | PR     | 7.75 LBS<br>3.52 Kg | 25 M. Ton<br>55,115 LBS | 50 M. Ton<br>110,230 LBS | 9-7/16"           | 5-15/16" | 1-1/4" | 5-1/2"           | 2"       | 2-7/8"   | 9/16" |        |          |         |        |         |         |       |
| 5012-7092-1-HDG | D-RING | HDG    | 7.93 LBS<br>3.6 Kg  |                         |                          |                   |          |        |                  |          |          |       | 240 MM | 151 MM   | 32 MM   | 140 MM | 50 MM   | 73 MM   | 14 MM |
| 5012-7092-2-PR  | STRAP  | PR     | 3.32 LBS<br>1.5 Kg  |                         |                          |                   |          |        |                  |          |          |       | 240 MM | 151 MM   | 32 MM   | 140 MM | 50 MM   | 73 MM   | 14 MM |
| 5012-7092-2-HDG | STRAP  | HDG    | 3.05 LBS<br>1.38 Kg |                         |                          |                   |          |        |                  |          |          |       | 240 MM | 151 MM   | 32 MM   | 140 MM | 50 MM   | 73 MM   | 14 MM |



# D-RINGS, CARGO CONTROL FLOOR CHAIN TIE-DOWNS ISO FLATRACK, FLATBED & AUTO TRAILERS

**D-RING MODEL 3701-1177**  
**STRAP MODEL 2902-1160-2**




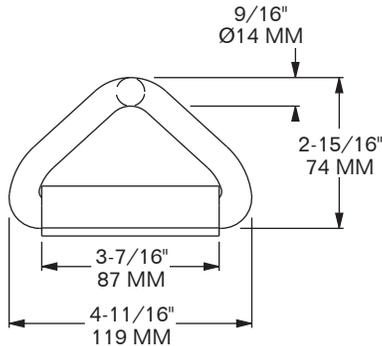


**SWL:** 5,000 LBS / 2,268 Kg  
**MBS:** 15,000 LBS / 6,804 Kg

**3701-1177 D-RING**  
**MATERIAL:** FORGED STEEL **FINISH:** SELF-COLOR  
**WEIGHT:** 0.77 LBS / 0.35 Kg

**2902-1160-2-SC or -HDG STRAP**  
**MATERIAL:** FORGED STEEL **FINISH:** SELF-COLOR or HDG  
**WEIGHT:** 0.54 LBS / 0.24 Kg




**MODEL 3701-7577-KIT**  
**CHAIN TIE-DOWN ANCHOR**

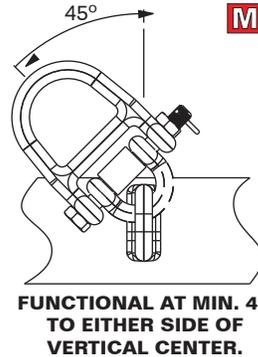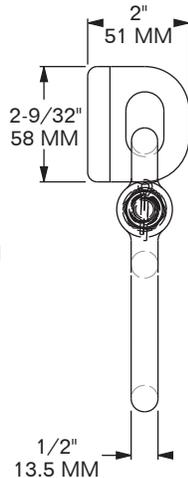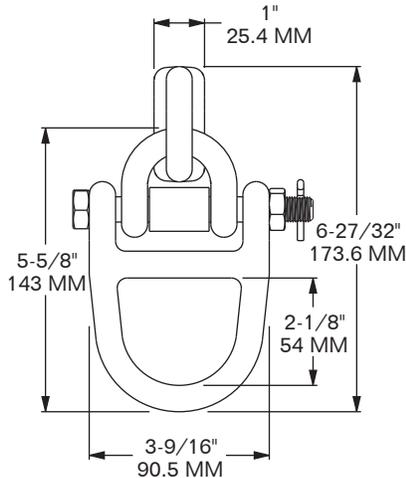

**SWL:** 5,000 LBS / 2,268 Kg  
**MBS:** 15,000 LBS / 6,804 Kg

**WEIGHT:** 2.04 LBS / 0.93 Kg

**MODEL 2902-2778**  
**CHAIN TIE-DOWN ANCHOR**

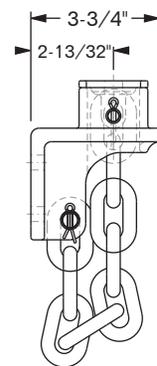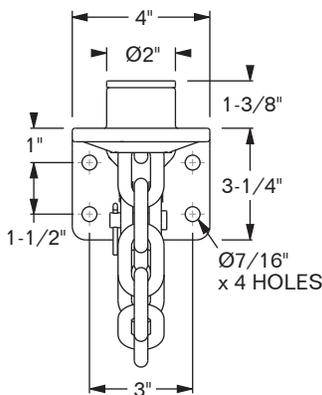

STAINLESS STEEL COVER PLATE, ALLOY STEEL CLEVIS PINS (2 PCS), STAINLESS STEEL COTTER PINS (2 PCS), 3/8" (10 MM) ALLOY STEEL GR 70 CHAIN

**FINISH:** HDG  
**WEIGHT:** 5.87 LBS / 2.66 Kg

**WORKING LOAD LIMIT (WLL):** 5,400 LBS / 2,449 Kg

