



3" & 4" WINCH STRAPS



FLAT HOOK

STANDARD
WORKING LOAD LIMIT (WLL): 5,000 LBS / 2,267 Kg
BREAK STRENGTH (BS): 15,000 LBS / 6,804 Kg

HEAVY DUTY (-HD)
WORKING LOAD LIMIT (WLL): 5,400 LBS / 2,450 Kg
BREAK STRENGTH (BS): 16,200 LBS / 7,350 Kg

SPECIAL ORDER ONLY

4" x 27' w/ FLAT HOOK **MODEL 2904-2805**

SUB FOR: ANCRA 43795-10-27P, KINEDYNE 422721, MULTIPRENS 2042-27

4" x 27' w/ FLAT HOOK **MODEL 2904-2805-HD**

4" x 30' w/ FLAT HOOK **MODEL 2904-2806**

4" x 30' w/ FLAT HOOK **MODEL 2904-2806-HD**

SUB FOR: ANCRA 43795-10-30P, KINEDYNE 423021, MULTIPRENS 2042-30

4" x 34' w/ FLAT HOOK **MODEL 2904-6043**

4" x 40' w/ FLAT HOOK **MODEL 2904-6004-HD**

SPECIAL ORDER ONLY 6005-HD & 6007

4" x 50' w/ FLAT HOOK **MODEL 2904-6005-HD**

4" x 73' w/ FLAT HOOK **MODEL 2904-6007**



DELTA RING

WORKING LOAD LIMIT (WLL): 5,400 LBS / 2,450 Kg
BREAK STRENGTH (BS): 16,200 LBS / 7,350 Kg

SPECIAL ORDER ONLY

SPECIAL ORDER ONLY

4" x 27' w/ DELTA RING **MODEL 2904-2807**

SUB FOR: ANCRA 43795-11-27P, KINEDYNE 422710, MULTIPRENS 2041-27

4" x 30' w/ DELTA RING **MODEL 2904-2808**

SUB FOR: ANCRA 43795-11-30P, KINEDYNE 423010, MULTIPRENS 2041-30

4" x 34' w/ DELTA RING **MODEL 2904-2849**

4" x 40' w/ DELTA RING (white strap) **MODEL 2904-6425**

4" x 73' w/ DELTA RING (white strap) **MODEL 2904-6426**



DELTA RING
w/ GRAB HOOK

WORKING LOAD LIMIT (WLL): 5,400 LBS / 2,450 Kg
BREAK STRENGTH (BS): 16,200 LBS / 7,350 Kg

4" x 27' w/ GRAB HOOK **MODEL 2904-2809**

SUB FOR: ANCRA 43795-14-27P, KINEDYNE 422750, MULTIPRENS 2044-27

4" x 30' w/ GRAB HOOK **MODEL 2904-2810**

SUB FOR: ANCRA 43795-14-30P, KINEDYNE 423050, MULTIPRENS 2044-30



CHAIN ANCHOR

WORKING LOAD LIMIT (WLL): 5,400 LBS / 2,450 Kg
BREAK STRENGTH (BS): 16,200 LBS / 7,350 Kg

3" x 30' w/ CHAIN ANCHOR **MODEL 2904-6820**

SUB FOR: ANCRA 41660-14-30P, KINEDYNE 323040

4" x 27' w/ CHAIN ANCHOR **MODEL 2904-2811**

SUB FOR: ANCRA 43795-15-27P, KINEDYNE 422740, MULTIPRENS 2043-27

4" x 30' w/ CHAIN ANCHOR **MODEL 2904-2812**

SUB FOR: ANCRA 43795-15-30P, KINEDYNE 423040, MULTIPRENS 2043-30



HALF-TWISTED
SEWN LOOP

WORKING LOAD LIMIT (WLL): 5,000 LBS / 2,267 Kg
BREAK STRENGTH (BS): 16,200 LBS / 7,350 Kg

4" x 27' w/ SEWN LOOP **MODEL 2904-2813**

SUB FOR: ANCRA 43795-13-27, KINEDYNE 422730, MULTIPRENS 2040-27

4" x 30' w/ SEWN LOOP **MODEL 2904-2814**

SUB FOR: ANCRA 43795-13-30, KINEDYNE 423030, MULTIPRENS 2040-30



4" x 5' w/ FLAT CONTAINER HOOK
FOR ROLL-OFF REFUSE CONTAINERS

MODEL 2904-6079

WORKING LOAD LIMIT (WLL): 5,400 LBS / 2,450 Kg
BREAK STRENGTH (BS): 16,200 LBS / 7,350 Kg

SUB FOR: ANCRA 49526-10,
KINEDYNE 15435

NOTE: FOR LOAD SECURING ONLY, **NOT FOR LIFTING**. ALL WINCH AND STRAP ASSEMBLIES SHOULD BE INSPECTED FOR FRAYS, CUTS, OR DAMAGED HARDWARE BEFORE AND AFTER USING. DESIGNED TO MEET OR EXCEED WSTDA T-1 STANDARD.

BUFFERS USA INC

"The Intermodal Hardware Specialists"



904-696-0010 FAX: 904-696-0019

E-mail: sales@buffersusa.com

2904-1

12/12/19

MODEL 2904-6094
for up to 4"-wide Webbing

MATERIAL: PLASTIC **COLOR:** WHITE
WEIGHT: 0.16 LBS / 0.072 Kg

MODEL 2904-6095
HD DESIGN for up to 4"-wide Webbing

MATERIAL: PLASTIC **COLOR:** ORANGE
WEIGHT: 0.23 LBS / 0.105 Kg

MODEL 2904-6096
for 2"-4"-wide Webbing

MATERIAL: STEEL **FINISH:** ZINC-PLATED
WEIGHT: 1.2 LBS / 0.54 Kg

MODEL 2904-6098
COMBINED PROTECTION
for use w/ Chain

MATERIAL: STEEL **FINISH:** ZINC-PLATED
WEIGHT: 1.1 LBS / 0.5 Kg


MODEL 2904-6099
WEBBING PROTECTION ONLY
for 1"-4"-wide Webbing

MATERIAL: BLACK RUBBER **FINISH:** SELF-COLOR
WEIGHT: 0.68 LBS / 0.31 Kg



MODEL 2904-7175-11


STANDARD DUTY

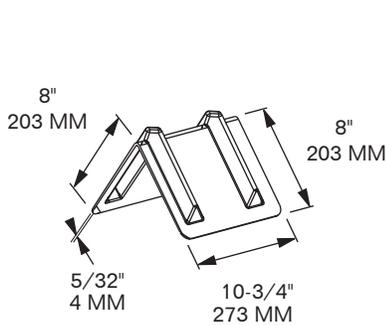

COLOR: BLUE
WEIGHT: 1.00 LBS / 0.45 Kg
MATERIAL: HDPE

MODEL 2904-7175-24


STANDARD DUTY

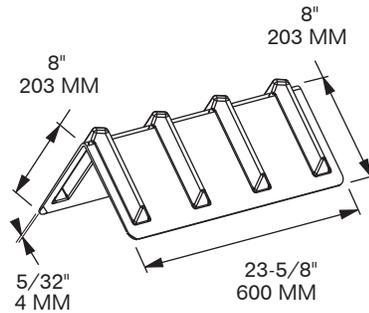

COLOR: BLUE
WEIGHT: 2.12 LBS / 0.96 Kg
MATERIAL: HDPE

MODEL 2904-7175-36


STANDARD DUTY

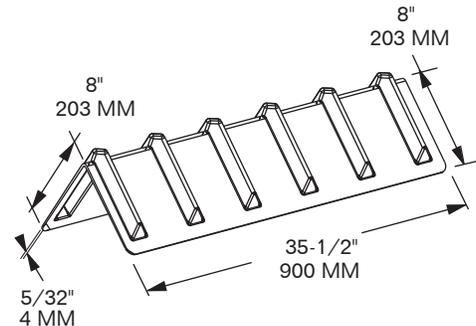

COLOR: BLUE
WEIGHT: 3.38 LBS / 1.53 Kg
MATERIAL: HDPE

MODEL 2904-7175-48

STANDARD DUTY

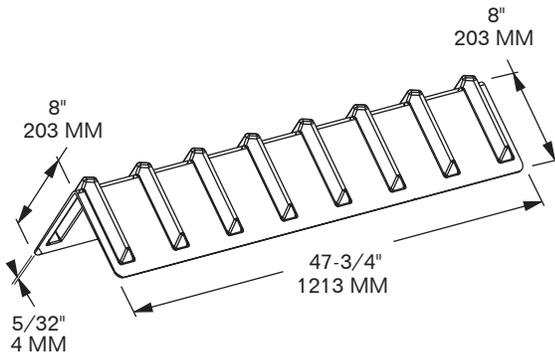


COLOR: BLUE
WEIGHT: 4.97 LBS / 2.25 Kg
MATERIAL: HDPE

MODEL 2904-6802
CORNER PROTECTOR PLACEMENT TOOL

MODEL 2904-6803
GRABBER HEAD

MODEL 2904-6804
EXTENSION POLE




SHOWN PLACING
 CORNER PROTECTOR




2904-6804
 EXTENSION POLE
 ADJUSTABLE FROM
 50-3/4" (1,289 MM)
 TO
 8' (2,438 MM)

2904-6802
 PLACEMENT TOOL CONSISTS OF
2904-6803 GRABBER HEAD
 AND **2904-6804** EXTENSION POLE.

2904-6803 AND **2904-6804**
 ARE ALSO SOLD SEPARATELY.

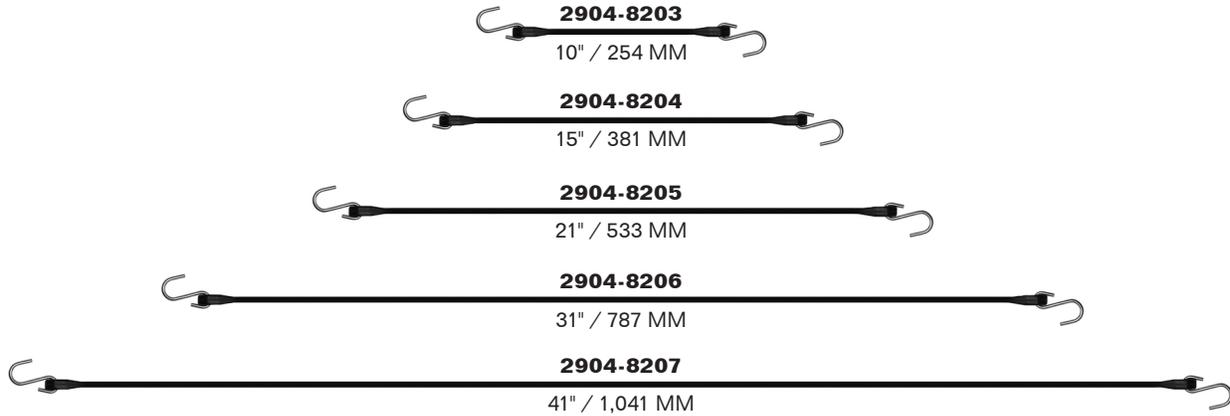

	MODEL	NOMINAL LENGTH	INSTALLED MAX. LENGTH	WEIGHT
SPECIAL ORDER ONLY	2904-8203	10" / 254 MM	15" / 381 MM	0.04 LBS / 0.02 Kg
	2904-8204	15" / 381 MM	23" / 584 MM	0.22 LBS / 0.1 Kg
	2904-8205	21" / 533 MM	32" / 813 MM	0.25 LBS / 0.11 Kg
SPECIAL ORDER ONLY	2904-8206	31" / 787 MM	36" / 914 MM	0.3 LBS / 0.14 Kg
SPECIAL ORDER ONLY	2904-8207	41" / 1,041 MM	62" / 1,575 MM	0.4 LBS / 0.18 Kg

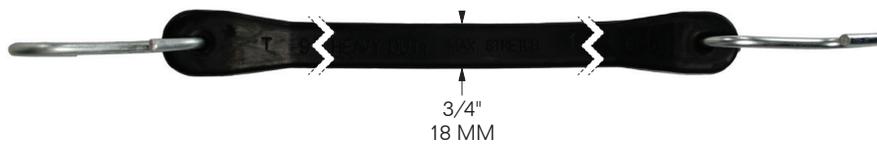

- Reinforced Ends for added strength
- Zinc-plated Hooks
- Not designed for Load Securing

MATERIAL: EPDM SYNTHETIC RUBBER **FINISH:** BLACK
PACKAGING: 50 PCS./BAG & 2 BAGS/CARTON