




MANUAL TWISTLOCK

3-WAY LOCKING TYPE


ISO, DOMCON & ISO FLATRACK CONTAINERS

MODEL 5005-7726-LL

MODEL 5005-7726-RL

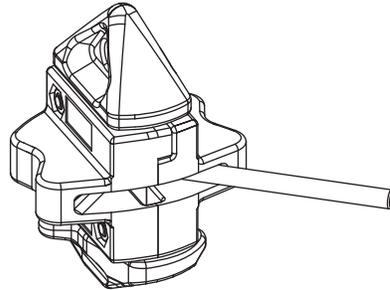




MODEL 5005-7726-LL
Left-Locking



MODEL 5005-7726-RL
Right-Locking

MODEL	TENSION BREAKING LOAD (M. TON)	SHEAR BREAKING LOAD (M. TON)	WEIGHT	PAD SIZE W x L
5005-7726-LL	50	42	13.2 LBS / 5.9 Kg	135 MM x 105 MM
5005-7726-RL	50	42	13.2 LBS / 5.9 Kg	135 MM x 105 MM

THREE-WAY LOCKING FEATURE:
Bottom Cone is prelocked when Top Cone is open to prevent roll-out during loading.

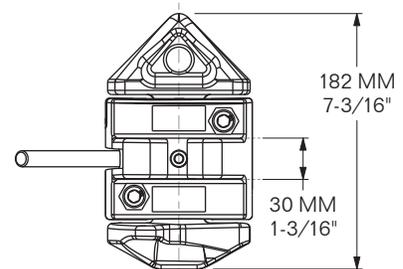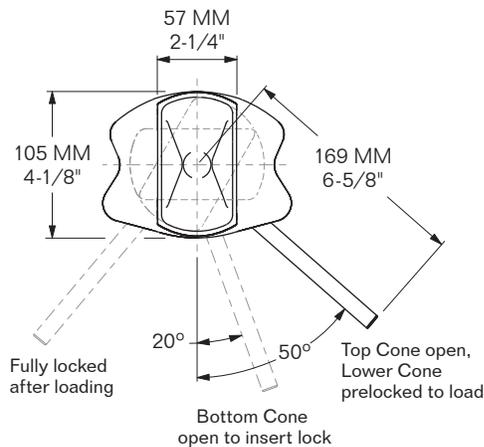


B.L. TENSION: 50 M. TON PROOF LOAD: 32 M. TON
B.L. SHEAR: 42 M. TON PROOF LOAD: 26 M. TON
B.L. COMPRESSION: 100 M. TON
FINISH: HOT-DIP GALVANIZED (HDG)

NOTE: THIS FIXED-BASE DESIGN PREVENTS PLACING THE LOCK UPSIDE DOWN THAT CAN OTHERWISE CONFUSE LEFT LOCK BEING OPEN AS BEING CLOSED. FIXED-BASE FLANGES ALSO PREVENT ROLL-OUT DURING LOADING.




MODEL 5005-2936-LL

MODEL 5005-2936-RL

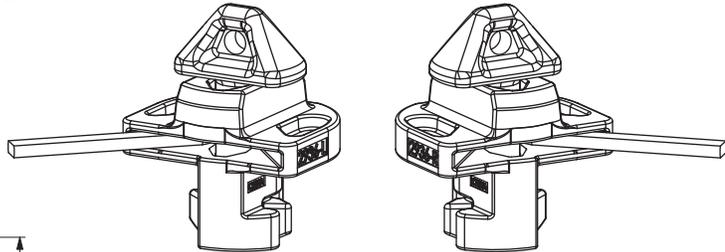

LEFT-LOCKING

RIGHT-LOCKING

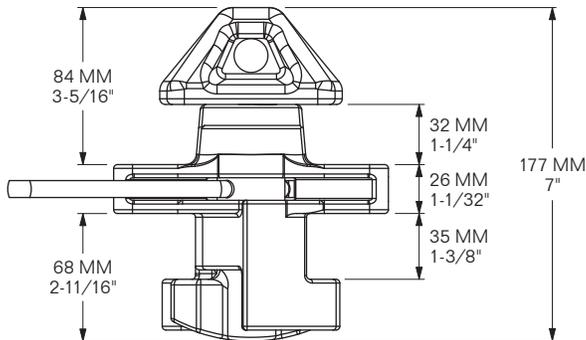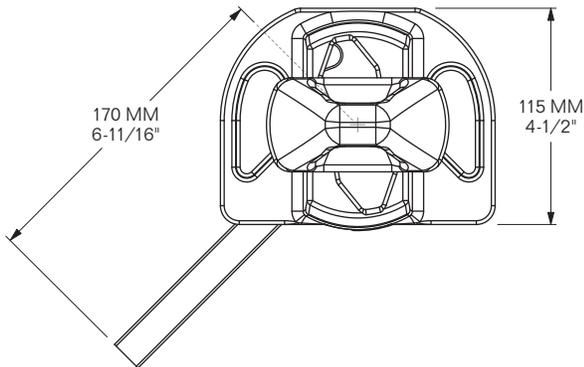

ITEM	QTY	MODEL	DESCRIPTION	WEIGHT
1	1	5005-2936-1-L	Housing, left-locking	12.2 LBS / 5.5 Kg
1	1	5005-2936-1-R	Housing, right-locking	12.2 LBS / 5.5 Kg
2	1	5005-2936-2-L	Pin, left-locking	4.8 LBS / 2.2 Kg
2	1	5005-2936-2-R	Pin, right-locking	4.8 LBS / 2.2 Kg
3	1	5005-2936-4	Handle, non-handed	0.45 LBS / 0.2 Kg
4	1	5005-2936-5	Leaf Spring, SS	0.01 LBS / 0.01 Kg
5	1	5005-4757-SS	Split Roll Pin	0.01 LBS / 0.01 Kg

MBS TENSION: 50 M. TON **MBS SHEAR:** 40 M. TON
MBS COMPRESSION: 100 M. TON
FINISH: HOT-DIP GALVANIZED (HDG)
WEIGHT: 12.05 LBS / 5.47 Kg