


**SPECIAL ORDER ONLY** **MODEL 6103-1/2x15-4**

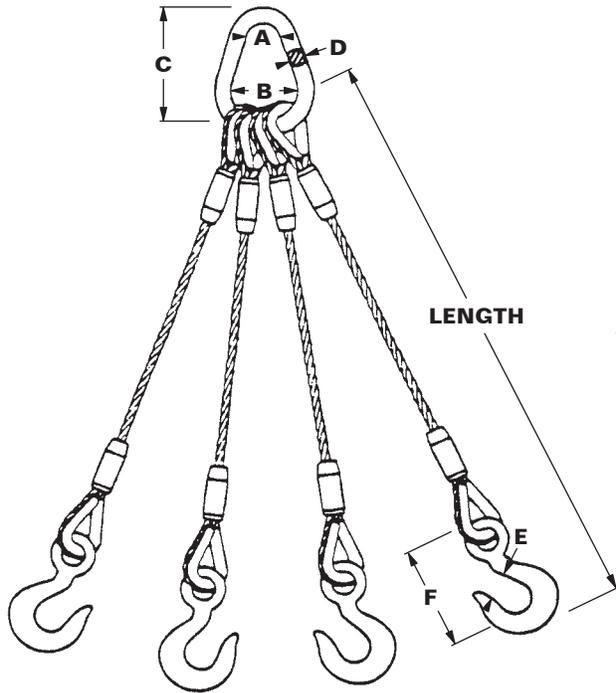

**CAPACITY PER SET:** AT 45° LIFT ANGLE – 6.2 M. TON SWL  
AT 60° LIFT ANGLE – 7.6 M. TON SWL  
**BREAK LOAD:** 5 x SWL (31–38 M. TON, 45–60° LIFT ANGLE)


**DIMENSIONS:** 15' LEG LENGTH (GIVES APPROXIMATELY 60° LIFT ANGLE FOR 14' x 8' CONTAINER).

**HOOK:** EYE HOIST HOOK, 7.5 M. TON, CARBON  
THIMBLES FITTED BOTH ENDS.

- A:** 64 MM / 2-1/2"
- B:** 127 MM / 5"
- C:** 260 MM / 10-1/4"
- D:** 32 MM / 1-1/4"
- E:** 57 MM / 2-1/4"
- F:** 230 MM / 9-1/16"

**SPECIAL ORDER ONLY** **MODEL 6103-1.25x5-H**

**5' WIRE SLING w/ THIMBLES  
& SWIVEL HOOK ON ONE END**  
Hook fits into ISO Corner Casting

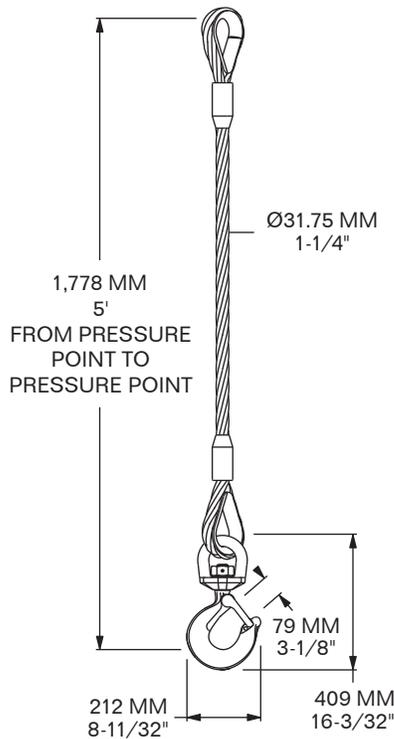

**WORKING LOAD LIMIT (WLL):** 12 M. TON  
**BREAK LOAD:** 5 x WLL: 60 M. TON

**ASSEMBLY WEIGHT:** 27.2 Kg / 60 LBS

**HOOK:** SWIVEL HOIST HOOK w/ LATCH, 15 M. TON, CARBON

