


MODEL	THREAD DIAMETER & TAKE-UP	WORKING LOAD LIMIT	WEIGHT	DIMENSION A
6105-TB-1/4 x 4-H/H	1/4 x 4	400 LBS	0.13 Kg / 0.3 LBS	11.43 MM / 0.45"
6105-TB-5/16 x 4-1/2-H/H	5/16 x 4-1/2	700 LBS	0.21 Kg / 0.47 LBS	12.7 MM / 0.5"
6105-TB-3/8 x 6-H/H	3/8 x 6	1,000 LBS	0.34 Kg / 0.75 LBS	14.22 MM / 0.56"
6105-TB-1/2 x 6-H/H	1/2 x 6	1,500 LBS	0.73 Kg / 1.6 LBS	16.76 MM / 0.66"
6105-TB-1/2 x 9-H/H	1/2 x 9	1,500 LBS	0.83 Kg / 1.83 LBS	16.76 MM / 0.66"
6105-TB-1/2 x 12-H/H	1/2 x 12	1,500 LBS	0.94 Kg / 2.08 LBS	16.76 MM / 0.66"
6105-TB-5/8 x 6-H/H	5/8 x 6	2,250 LBS	1.25 Kg / 2.75 LBS	21.34 MM / 0.84"
6105-TB-5/8 x 9-H/H	5/8 x 9	2,250 LBS	1.42 Kg / 3.13 LBS	21.34 MM / 0.84"
6105-TB-5/8 x 12-H/H	5/8 x 12	2,250 LBS	1.58 Kg / 3.5 LBS	21.34 MM / 0.84"
6105-TB-3/4 x 6-H/H	3/4 x 6	3,000 LBS	1.76 Kg / 3.89 LBS	24.89 MM / 0.98"
6105-TB-3/4 x 9-H/H	3/4 x 9	3,000 LBS	2.09 Kg / 4.61 LBS	24.89 MM / 0.98"
6105-TB-3/4 x 12-H/H	3/4 x 12	3,000 LBS	2.46 Kg / 5.43 LBS	24.89 MM / 0.98"
6105-TB-3/4 x 18-H/H	3/4 x 18	3,000 LBS	3.28 Kg / 7.25 LBS	24.89 MM / 0.98"
6105-TB-7/8 x 12-H/H	7/8 x 12	4,000 LBS	3.67 Kg / 8.1 LBS	28.7 MM / 1.13"
6105-TB-7/8 x 18-H/H	7/8 x 18	4,000 LBS	4.51 Kg / 9.95 LBS	28.7 MM / 1.13"
6105-TB-1 x 6-H/H	1 x 6	5,000 LBS	4.23 Kg / 9.33 LBS	31.75 MM / 1.25"
6105-TB-1 x 12-H/H	1 x 12	5,000 LBS	5.41 Kg / 11.93 LBS	31.75 MM / 1.25"
6105-TB-1 x 18-H/H	1 x 18	5,000 LBS	6.35 Kg / 14 LBS	31.75 MM / 1.25"
6105-TB-1 x 24-H/H	1 x 24	5,000 LBS	7.82 Kg / 17.25 LBS	31.75 MM / 1.25"
6105-TB-1-1/4 x 12-H/H	1-1/4 x 12	6,500 LBS	8.61 Kg / 19 LBS	38.1 MM / 1.5"
6105-TB-1-1/4 x 18-H/H	1-1/4 x 18	6,500 LBS	10.43 Kg / 23 LBS	38.1 MM / 1.5"
6105-TB-1-1/4 x 24-H/H	1-1/4 x 24	6,500 LBS	12.25 Kg / 27 LBS	38.1 MM / 1.5"
6105-TB-1-1/2 x 12-H/H	1-1/2 x 12	7,500 LBS	12.47 Kg / 27.5 LBS	47.75 MM / 1.88"
6105-TB-1-1/2 x 18-H/H	1-1/2 x 18	7,500 LBS	14.06 Kg / 31 LBS	47.75 MM / 1.88"
6105-TB-1-1/2 x 24-H/H	1-1/2 x 24	7,500 LBS	17.01 Kg / 37.5 LBS	47.75 MM / 1.88"

MBS: 5 x WLL


MATERIAL: FORGED STEEL
FINISH: HOT-DIP GALVANIZED (HDG)

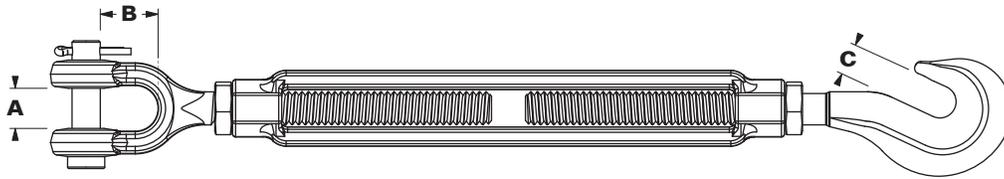

MODEL	THREAD DIAMETER & TAKE-UP	WORKING LOAD LIMIT	WEIGHT	DIMENSIONS		
				A	B	C
6105-TB-1/4 x 4-H/J	1/4 x 4	400 LBS	0.15 Kg / 0.32 LBS	11.43 MM / 0.45"	15.75 MM / 0.62"	11.43 MM / 0.45"
6105-TB-5/16 x 4-1/2-H/J	5/16 x 4-1/2	700 LBS	0.21 Kg / 0.47 LBS	12.7 MM / 0.5"	22.09 MM / 0.87"	12.7 MM / 0.5"
6105-TB-3/8 x 6-H/J	3/8 x 6	1,000 LBS	0.34 Kg / 0.76 LBS	13.72 MM / 0.54"	22.09 MM / 0.87"	14.22 MM / 0.56"
6105-TB-1/2 x 6-H/J	1/2 x 6	1,500 LBS	0.69 Kg / 1.53 LBS	16 MM / 0.63"	26.92 MM / 1.06"	16.76 MM / 0.66"
6105-TB-1/2 x 9-H/J	1/2 x 9	1,500 LBS	0.8 Kg / 1.76 LBS	13.97 MM / 0.55"	26.92 MM / 1.06"	16.76 MM / 0.66"
6105-TB-1/2 x 12-H/J	1/2 x 12	1,500 LBS	0.99 Kg / 2.2 LBS	13.97 MM / 0.55"	26.92 MM / 1.06"	16.76 MM / 0.66"
6105-TB-5/8 x 6-H/J	5/8 x 6	2,250 LBS	1.2 Kg / 2.65 LBS	20.83 MM / 0.82"	33.27 MM / 1.31"	21.34 MM / 0.84"
6105-TB-5/8 x 9-H/J	5/8 x 9	2,250 LBS	1.39 Kg / 3.06 LBS	20.83 MM / 0.82"	33.27 MM / 1.31"	21.34 MM / 0.84"
6105-TB-3/8 x 12-H/J	5/8 x 12	2,250 LBS	1.71 Kg / 3.78 LBS	20.83 MM / 0.82"	33.27 MM / 1.31"	21.34 MM / 0.84"
6105-TB-3/4 x 6-H/J	3/4 x 6	3,000 LBS	1.81 Kg / 4 LBS	26.16 MM / 1.03"	38.1 MM / 1.5"	24.89 MM / 0.98"
6105-TB-3/4 x 9-H/J	3/4 x 9	3,000 LBS	2.15 Kg / 4.75 LBS	26.16 MM / 1.03"	38.1 MM / 1.5"	24.89 MM / 0.98"
6105-TB-3/4 x 12-H/J	3/4 x 12	3,000 LBS	2.61 Kg / 5.76 LBS	26.16 MM / 1.03"	38.1 MM / 1.5"	24.89 MM / 0.98"
6105-TB-3/4 x 18-H/J	3/4 x 18	3,000 LBS	3.18 Kg / 7 LBS	26.16 MM / 1.03"	38.1 MM / 1.5"	24.89 MM / 0.98"
6105-TB-7/8 x 12-H/J	7/8 x 12	4,000 LBS	3.63 Kg / 8 LBS	31.24 MM / 1.23"	44.45 MM / 1.75"	28.7 MM / 1.13"
6105-TB-7/8 x 18-H/J	7/8 x 18	4,000 LBS	4.81 Kg / 10.6 LBS	31.24 MM / 1.23"	44.45 MM / 1.75"	28.7 MM / 1.13"
6105-TB-1 x 6-H/J	1 x 6	5,000 LBS	4.15 Kg / 9.16 LBS	33.27 MM / 1.31"	52.32 MM / 2.06"	31.75 MM / 1.25"
6105-TB-1 x 12-H/J	1 x 12	5,000 LBS	5.17 Kg / 11.4 LBS	33.27 MM / 1.31"	52.32 MM / 2.06"	31.75 MM / 1.25"
6105-TB-1 x 18-H/J	1 x 18	5,000 LBS	6.69 Kg / 14.75 LBS	33.27 MM / 1.31"	52.32 MM / 2.06"	31.75 MM / 1.25"
6105-TB-1 x 24-H/J	1 x 24	5,000 LBS	7.94 Kg / 17.5 LBS	33.27 MM / 1.31"	52.32 MM / 2.06"	31.75 MM / 1.25"
6105-TB-1-1/4 x 12-H/J	1-1/4 x 12	6,500 LBS	9.07 Kg / 20 LBS	47.24 MM / 1.86"	71.37 MM / 2.81"	38.1 MM / 1.5"
6105-TB-1-1/4 x 18-H/J	1-1/4 x 18	6,500 LBS	10.97 Kg / 24.18 LBS	47.24 MM / 1.86"	71.37 MM / 2.81"	38.1 MM / 1.5"
6105-TB-1-1/4 x 24-H/J	1-1/4 x 24	6,500 LBS	12.93 Kg / 28.5 LBS	47.24 MM / 1.86"	71.37 MM / 2.81"	38.1 MM / 1.5"
6105-TB-1-1/2 x 12-H/J	1-1/2 x 12	7,500 LBS	14.11 Kg / 31.1 LBS	57.15 MM / 2.25"	71.37 MM / 2.81"	47.75 MM / 1.88"
6105-TB-1-1/2 x 18-H/J	1-1/2 x 18	7,500 LBS	15.88 Kg / 35 LBS	57.15 MM / 2.25"	71.37 MM / 2.81"	47.75 MM / 1.88"
6105-TB-1-1/2 x 24-H/J	1-1/2 x 24	7,500 LBS	20.05 Kg / 44.2 LBS	57.15 MM / 2.25"	71.37 MM / 2.81"	47.75 MM / 1.88"

MBS: 5 x WLL


MATERIAL: FORGED STEEL
FINISH: HOT-DIP GALVANIZED (HDG)

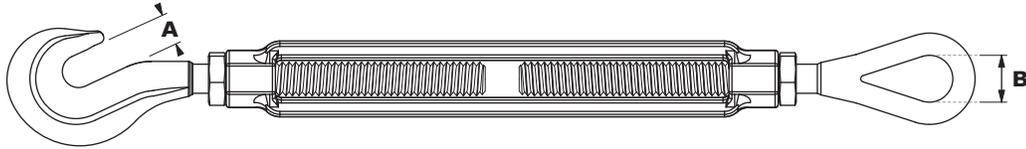

MODEL	THREAD DIAMETER & TAKE-UP	WORKING LOAD LIMIT	WEIGHT	DIMENSIONS	
				A	B
6105-TB-1/4 x 4-H/E	1/4 x 4	400 LBS	0.13 Kg / 0.3 LBS	11.43 MM / 0.45"	8.63 MM / 0.34"
6105-TB-5/16 x 4-1/2-H/E	5/16 x 4-1/2	700 LBS	0.21 Kg / 0.47 LBS	12.7 MM / 0.5"	11.18 MM / 0.44"
6105-TB-3/8 x 6-H/E	3/8 x 6	1,000 LBS	0.34 Kg / 0.75 LBS	14.22 MM / 0.56"	13.46 MM / 0.53"
6105-TB-1/2 x 6-H/E	1/2 x 6	1,500 LBS	0.73 Kg / 1.6 LBS	16.76 MM / 0.66"	18.54 MM / 0.72"
6105-TB-1/2 x 9-H/E	1/2 x 9	1,500 LBS	0.83 Kg / 1.83 LBS	16.76 MM / 0.66"	18.54 MM / 0.72"
6105-TB-1/2 x 12-H/E	1/2 x 12	1,500 LBS	0.94 Kg / 2.08 LBS	16.76 MM / 0.66"	18.54 MM / 0.72"
6105-TB-5/8 x 6-H/E	5/8 x 6	2,250 LBS	1.25 Kg / 2.75 LBS	21.34 MM / 0.84"	22.35 MM / 0.88"
6105-TB-5/8 x 9-H/E	5/8 x 9	2,250 LBS	1.42 Kg / 3.13 LBS	21.34 MM / 0.84"	22.35 MM / 0.88"
6105-TB-5/8 x 12-H/E	5/8 x 12	2,250 LBS	1.58 Kg / 3.5 LBS	21.34 MM / 0.84"	22.35 MM / 0.88"
6105-TB-3/4 x 6-H/E	3/4 x 6	3,000 LBS	1.76 Kg / 3.89 LBS	24.89 MM / 0.98"	25.4 MM / 1"
6105-TB-3/4 x 9-H/E	3/4 x 9	3,000 LBS	2.09 Kg / 4.61 LBS	24.89 MM / 0.98"	25.4 MM / 1"
6105-TB-3/4 x 12-H/E	3/4 x 12	3,000 LBS	2.46 Kg / 5.43 LBS	24.89 MM / 0.98"	25.4 MM / 1"
6105-TB-3/4 x 18-H/E	3/4 x 18	3,000 LBS	3.28 Kg / 7.25 LBS	24.89 MM / 0.98"	25.4 MM / 1"
6105-TB-7/8 x 12-H/E	7/8 x 12	4,000 LBS	3.67 Kg / 8.1 LBS	28.7 MM / 1.13"	31.75 MM / 1.25"
6105-TB-7/8 x 18-H/E	7/8 x 18	4,000 LBS	4.51 Kg / 9.95 LBS	28.7 MM / 1.13"	31.75 MM / 1.25"
6105-TB-1 x 6-H/E	1 x 6	5,000 LBS	4.23 Kg / 9.33 LBS	31.75 MM / 1.25"	36.58 MM / 1.44"
6105-TB-1 x 12-H/E	1 x 12	5,000 LBS	5.41 Kg / 11.93 LBS	31.75 MM / 1.25"	36.58 MM / 1.44"
6105-TB-1 x 18-H/E	1 x 18	5,000 LBS	6.35 Kg / 14 LBS	31.75 MM / 1.25"	36.58 MM / 1.44"
6105-TB-1 x 24-H/E	1 x 24	5,000 LBS	7.82 Kg / 17.25 LBS	31.75 MM / 1.25"	36.58 MM / 1.44"
6105-TB-1-1/4 x 12-H/E	1-1/4 x 12	6,500 LBS	8.61 Kg / 19 LBS	38.1 MM / 1.5"	45.97 MM / 1.81"
6105-TB-1-1/4 x 18-H/E	1-1/4 x 18	6,500 LBS	10.43 Kg / 23 LBS	38.1 MM / 1.5"	45.97 MM / 1.81"
6105-TB-1-1/4 x 24-H/E	1-1/4 x 24	6,500 LBS	12.25 Kg / 27 LBS	38.1 MM / 1.5"	45.97 MM / 1.81"
6105-TB-1-1/2 x 12-H/E	1-1/2 x 12	7,500 LBS	12.47 Kg / 27.5 LBS	47.75 MM / 1.88"	53.85 MM / 2.12"
6105-TB-1-1/2 x 18-H/E	1-1/2 x 18	7,500 LBS	14.06 Kg / 31 LBS	47.75 MM / 1.88"	53.85 MM / 2.12"
6105-TB-1-1/2 x 24-H/E	1-1/2 x 24	7,500 LBS	17.01 Kg / 37.5 LBS	47.75 MM / 1.88"	53.85 MM / 2.12"

MBS: 5 x WLL


MATERIAL: FORGED STEEL
FINISH: HOT-DIP GALVANIZED (HDG)

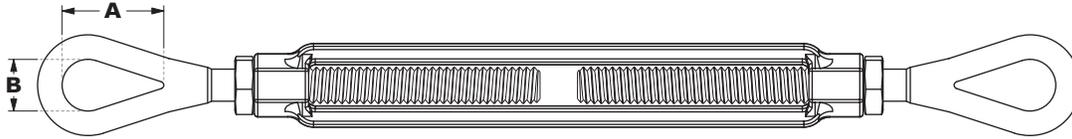

MODEL	THREAD DIAMETER & TAKE-UP	WORKING LOAD LIMIT	WEIGHT	DIMENSIONS	
				A	B
6105-TB-1/4 x 4-E/E	1/4 x 4	500 LBS	0.14 Kg / 0.3 LBS	19.81 MM / 0.78"	8.64 MM / 0.34"
6105-TB-5/16 x 4-1/2-E/E	5/16 x 4-1/2	800 LBS	0.21 Kg / 0.46 LBS	23.88 MM / 0.94"	11.18 MM / 0.44"
6105-TB-3/8 x 6-E/E	3/8 x 6	1,200 LBS	0.33 Kg / 0.73 LBS	28.45 MM / 1.12"	13.46 MM / 0.53"
6105-TB-1/2 x 6-E/E	1/2 x 6	2,200 LBS	0.66 Kg / 1.46 LBS	36.57 MM / 1.44"	18.28 MM / 0.72"
6105-TB-1/2 x 9-E/E	1/2 x 9	2,200 LBS	0.78 Kg / 1.71 LBS	36.57 MM / 1.44"	18.28 MM / 0.72"
6105-TB-1/2 x 12-E/E	1/2 x 12	2,200 LBS	0.99 Kg / 2.19 LBS	36.57 MM / 1.44"	18.28 MM / 0.72"
6105-TB-5/8 x 6-E/E	5/8 x 6	3,500 LBS	1.12 Kg / 2.47 LBS	44.45 MM / 1.75"	22.35 MM / 0.88"
6105-TB-5/8 x 9-E/E	5/8 x 9	3,500 LBS	1.32 Kg / 2.9 LBS	44.45 MM / 1.75"	22.35 MM / 0.88"
6105-TB-5/8 x 12-E/E	5/8 x 12	3,500 LBS	1.50 Kg / 3.3 LBS	44.45 MM / 1.75"	22.35 MM / 0.88"
6105-TB-3/4 x 6-E/E	3/4 x 6	5,200 LBS	1.77 Kg / 3.9 LBS	53.09 MM / 2.09"	25.4 MM / 1"
6105-TB-3/4 x 9-E/E	3/4 x 9	5,200 LBS	2.07 Kg / 4.6 LBS	53.09 MM / 2.09"	25.4 MM / 1"
6105-TB-3/4 x 12-E/E	3/4 x 12	5,200 LBS	2.47 Kg / 5.46 LBS	53.09 MM / 2.09"	25.4 MM / 1"
6105-TB-3/4 x 18-E/E	3/4 x 18	5,200 LBS	3.16 Kg / 6.97 LBS	53.09 MM / 2.09"	25.4 MM / 1"
6105-TB-7/8 x 6-E/E	7/8 x 6	7,200 LBS	2.65 Kg / 5.85 LBS	60.45 MM / 2.38"	31.75 MM / 1.25"
6105-TB-7/8 x 12-E/E	7/8 x 12	7,200 LBS	3.47 Kg / 7.65 LBS	60.45 MM / 2.38"	31.75 MM / 1.25"
6105-TB-7/8 x 18-E/E	7/8 x 18	7,200 LBS	4.65 Kg / 10.25 LBS	60.45 MM / 2.38"	31.75 MM / 1.25"
6105-TB-1 x 6-E/E	1 x 6	10,000 LBS	4.07 Kg / 8.98 LBS	76.2 MM / 3"	36.58 MM / 1.44"
6105-TB-1 x 12-E/E	1 x 12	10,000 LBS	5.13 Kg / 11.31 LBS	76.2 MM / 3"	36.58 MM / 1.44"
6105-TB-1 x 18-E/E	1 x 18	10,000 LBS	6.35 Kg / 14 LBS	76.2 MM / 3"	36.58 MM / 1.44"
6105-TB-1 x 24-E/E	1 x 24	10,000 LBS	7.27 Kg / 16.02 LBS	76.2 MM / 3"	36.58 MM / 1.44"
6105-TB-1-1/4 x 6-E/E	1-1/4 x 6	15,200 LBS	7.01 Kg / 15.45 LBS	90.42 MM / 3.56"	45.97 MM / 1.81"
6105-TB-1-1/4 x 12-E/E	1-1/4 x 12	15,200 LBS	8.61 Kg / 19 LBS	90.42 MM / 3.56"	45.97 MM / 1.81"
6105-TB-1-1/4 x 18-E/E	1-1/4 x 18	15,200 LBS	10.21 Kg / 22.5 LBS	90.42 MM / 3.56"	45.97 MM / 1.81"
6105-TB-1-1/4 x 24-E/E	1-1/4 x 24	15,200 LBS	11.34 Kg / 25 LBS	90.42 MM / 3.56"	45.97 MM / 1.81"
6105-TB-1-1/2 x 12-E/E	1-1/2 x 12	21,400 LBS	12.25 Kg / 27 LBS	103.12 MM / 4.06"	53.85 MM / 2.12"
6105-TB-1-1/2 x 18-E/E	1-1/2 x 18	21,400 LBS	14.37 Kg / 31.69 LBS	103.12 MM / 4.06"	53.85 MM / 2.12"
6105-TB-1-1/2 x 24-E/E	1-1/2 x 24	21,400 LBS	17.33 Kg / 38.2 LBS	103.12 MM / 4.06"	53.85 MM / 2.12"
6105-TB-1-3/4 x 18-E/E	1-3/4 x 18	28,000 LBS	20.5 Kg / 45.2 LBS	117.35 MM / 4.62"	60.45 MM / 2.38"
6105-TB-1-3/4 x 24-E/E	1-3/4 x 24	28,000 LBS	26.31 Kg / 58 LBS	117.35 MM / 4.62"	60.45 MM / 2.38"
6105-TB-2 x 24-E/E	2 x 24	37,000 LBS	36.99 Kg / 81.57 LBS	146.05 MM / 5.75"	68.33 MM / 2.69"
6105-TB-2-1/2 x 24-E/E	2-1/2 x 24	60,000 LBS	81.65 Kg / 180 LBS	165.1 MM / 6.5"	79.25 MM / 3.12"
6105-TB-2-3/4 x 24-E/E	2-3/4 x 24	75,000 LBS	95.25 Kg / 210 LBS	177.8 MM / 7"	82.55 MM / 3.25"

MBS: 5 x WLL


MATERIAL: FORGED STEEL
FINISH: HOT-DIP GALVANIZED (HDG)

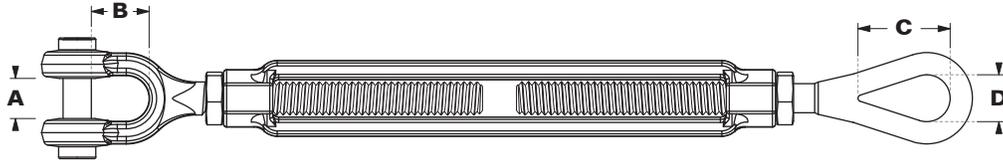

MODEL	THREAD DIAMETER & TAKE-UP	WORKING LOAD LIMIT	WEIGHT	DIMENSIONS			
				A	B	C	D
6105-TB-1/4 x 4-J/E	1/4 x 4	500 LBS	0.15 Kg / 0.32 LBS	11.43 MM / 0.45"	15.75 MM / 0.62"	19.81 MM / 0.78"	8.64 MM / 0.34"
6105-TB-5/16 x 4-1/2-J/E	5/16 x 4-1/2	800 LBS	0.21 Kg / 0.47 LBS	12.7 MM / 0.5"	22.1 MM / 0.87"	23.88 MM / 0.94"	11.18 MM / 0.44"
6105-TB-3/8 x 6-J/E	3/8 x 6	1,200 LBS	0.34 Kg / 0.76 LBS	13.72 MM / 0.54"	22.1 MM / 0.87"	28.45 MM / 1.12"	13.46 MM / 0.53"
6105-TB-1/2 x 6-J/E	1/2 x 6	2,200 LBS	0.69 Kg / 1.53 LBS	16 MM / 0.63"	26.92 MM / 1.06"	36.57 MM / 1.44"	18.28 MM / 0.72"
6105-TB-1/2 x 9-J/E	1/2 x 9	2,200 LBS	0.87 Kg / 1.91 LBS	13.97 MM / 0.55"	26.92 MM / 1.06"	36.57 MM / 1.44"	18.28 MM / 0.72"
6105-TB-1/2 x 12-J/E	1/2 x 12	2,200 LBS	0.99 Kg / 2.2 LBS	13.97 MM / 0.55"	26.92 MM / 1.06"	36.57 MM / 1.44"	18.28 MM / 0.72"
6105-TB-5/8 x 6-J/E	5/8 x 6	3,500 LBS	1.2 Kg / 2.65 LBS	20.83 MM / 0.82"	33.27 MM / 1.31"	44.45 MM / 1.75"	22.35 MM / 0.88"
6105-TB-5/8 x 9-J/E	5/8 x 9	3,500 LBS	1.39 Kg / 3.06 LBS	20.83 MM / 0.82"	33.27 MM / 1.31"	44.45 MM / 1.75"	22.35 MM / 0.88"
6105-TB-5/8 x 12-J/E	5/8 x 12	3,500 LBS	1.71 Kg / 3.78 LBS	20.83 MM / 0.82"	33.27 MM / 1.31"	44.45 MM / 1.75"	22.35 MM / 0.88"
6105-TB-3/4 x 6-J/E	3/4 x 6	5,200 LBS	1.81 Kg / 4 LBS	26.16 MM / 1.03"	38.1 MM / 1.5"	53.09 MM / 2.09"	25.4 MM / 1"
6105-TB-3/4 x 9-J/E	3/4 x 9	5,200 LBS	2.15 Kg / 4.75 LBS	26.16 MM / 1.03"	38.1 MM / 1.5"	53.09 MM / 2.09"	25.4 MM / 1"
6105-TB-3/4 x 12-J/E	3/4 x 12	5,200 LBS	2.61 Kg / 5.76 LBS	26.16 MM / 1.03"	38.1 MM / 1.5"	53.09 MM / 2.09"	25.4 MM / 1"
6105-TB-3/4 x 18-J/E	3/4 x 18	5,200 LBS	3.18 Kg / 7 LBS	26.16 MM / 1.03"	38.1 MM / 1.5"	53.09 MM / 2.09"	25.4 MM / 1"
6105-TB-7/8 x 6-J/E	7/8 x 6	7,200 LBS	2.85 Kg / 6.29 LBS	31.24 MM / 1.23"	44.45 MM / 1.75"	60.45 MM / 2.38"	31.75 MM / 1.25"
6105-TB-7/8 x 12-J/E	7/8 x 12	7,200 LBS	3.63 Kg / 8 LBS	31.24 MM / 1.23"	44.45 MM / 1.75"	60.45 MM / 2.38"	31.75 MM / 1.25"
6105-TB-7/8 x 18-J/E	7/8 x 18	7,200 LBS	4.81 Kg / 10.6 LBS	31.24 MM / 1.23"	44.45 MM / 1.75"	60.45 MM / 2.38"	31.75 MM / 1.25"
6105-TB-1 x 6-J/E	1 x 6	10,000 LBS	4.15 Kg / 9.16 LBS	33.27 MM / 1.31"	52.32 MM / 2.06"	76.2 MM / 3"	36.58 MM / 1.44"
6105-TB-1 x 12-J/E	1 x 12	10,000 LBS	5.17 Kg / 11.4 LBS	33.27 MM / 1.31"	52.32 MM / 2.06"	76.2 MM / 3"	36.58 MM / 1.44"
6105-TB-1 x 18-J/E	1 x 18	10,000 LBS	6.69 Kg / 14.75 LBS	33.27 MM / 1.31"	52.32 MM / 2.06"	76.2 MM / 3"	36.58 MM / 1.44"
6105-TB-1 x 24-J/E	1 x 24	10,000 LBS	7.94 Kg / 17.5 LBS	33.27 MM / 1.31"	52.32 MM / 2.06"	76.2 MM / 3"	36.58 MM / 1.44"
6105-TB-1-1/4 x 6-J/E	1-1/4 x 6	15,200 LBS	7.39 Kg / 16.3 LBS	47.24 MM / 1.86"	71.37 MM / 2.81"	90.42 MM / 3.56"	45.97 MM / 1.81"
6105-TB-1-1/4 x 12-J/E	1-1/4 x 12	15,200 LBS	9.07 Kg / 20 LBS	47.24 MM / 1.86"	71.37 MM / 2.81"	90.42 MM / 3.56"	45.97 MM / 1.81"
6105-TB-1-1/4 x 18-J/E	1-1/4 x 18	15,200 LBS	10.97 Kg / 24.18 LBS	47.24 MM / 1.86"	71.37 MM / 2.81"	90.42 MM / 3.56"	45.97 MM / 1.81"
6105-TB-1-1/4 x 24-J/E	1-1/4 x 24	15,200 LBS	12.93 Kg / 28.5 LBS	47.24 MM / 1.86"	71.37 MM / 2.81"	90.42 MM / 3.56"	45.97 MM / 1.81"
6105-TB-1-1/2 x 12-J/E	1-1/2 x 12	21,400 LBS	13.9 Kg / 30.65 LBS	57.15 MM / 2.25"	71.37 MM / 2.81"	103.12 MM / 4.06"	53.85 MM / 2.12"
6105-TB-1-1/2 x 18-J/E	1-1/2 x 18	21,400 LBS	15.87 Kg / 35 LBS	57.15 MM / 2.25"	71.37 MM / 2.81"	103.12 MM / 4.06"	53.85 MM / 2.12"
6105-TB-1-1/2 x 24-J/E	1-1/2 x 24	21,400 LBS	20.05 Kg / 44.2 LBS	57.15 MM / 2.25"	71.37 MM / 2.81"	103.12 MM / 4.06"	53.85 MM / 2.12"
6105-TB-1-3/4 x 18-J/E	1-3/4 x 18	28,000 LBS	22.14 Kg / 48.8 LBS	66.04 MM / 2.6"	85.85 MM / 3.38"	117.35 MM / 4.62"	60.45 MM / 2.38"
6105-TB-1-3/4 x 24-J/E	1-3/4 x 24	28,000 LBS	27.22 Kg / 60 LBS	66.04 MM / 2.6"	85.85 MM / 3.38"	117.35 MM / 4.62"	60.45 MM / 2.38"
6105-TB-2 x 24-J/E	2 x 24	37,000 LBS	46.27 Kg / 102 LBS	66.55 MM / 2.62"	93.73 MM / 3.69"	146.05 MM / 5.75"	68.33 MM / 2.69"
6105-TB-2-1/2 x 24-J/E	2-1/2 x 24	60,000 LBS	83.01 Kg / 183 LBS	77.72 MM / 3.06"	112.78 MM / 4.44"	165.1 MM / 6.5"	79.25 MM / 3.12"
6105-TB-2-3/4 x 24-J/E	2-3/4 x 24	75,000 LBS	97.07 Kg / 214 LBS	93.47 MM / 3.68"	106.43 MM / 4.19"	177.8 MM / 7"	82.55 MM / 3.25"

MBS: 5 x WLL

MATERIAL: FORGED STEEL
FINISH: HOT-DIP GALVANIZED (HDG)

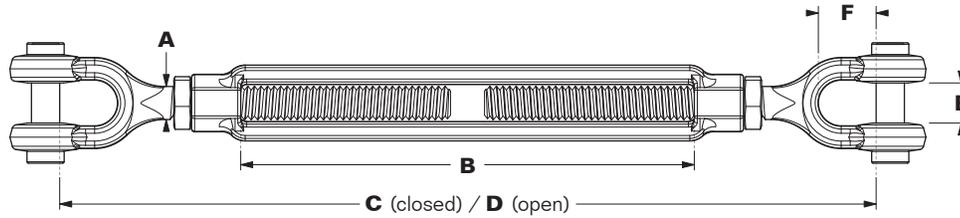

MODEL	Working Load Limit (WLL)	Thread Diameter A	Take-Up B	Operating Range		Jaw Opening E	Jaw Clearance F	WEIGHT
				C (Min.)	D (Max.)			
6105-TB-1/4x4-J/J	500 LBS	1/4"	4"	6-7/8"	10-7/8"	11.43 MM / 0.45"	15.75 MM / 0.62"	0.16 Kg / 0.36 LBS
6105-TB-5/16x4-1/2-J/J	800 LBS	5/16"	4-1/2"	8-3/8"	12-3/8"	12.7 MM / 0.5"	22.1 MM / 0.87"	0.24 Kg / 0.52 LBS
6105-TB-3/8x6-J/J	1,200 LBS	3/8"	6"	11-3/8"	17-3/8"	13.72 MM / 0.54"	22.1 MM / 0.87"	0.37 Kg / 0.81 LBS
6105-TB-1/2x6-J/J	2,200 LBS	1/2"	6"	11-1/2"	18-1/2"	13.97 MM / 0.55"	26.92 MM / 1.06"	0.71 Kg / 1.56 LBS
6105-TB-1/2x9-J/J	2,200 LBS	1/2"	9"	14-1/2"	24-1/2"	13.97 MM / 0.55"	26.92 MM / 1.06"	0.79 Kg / 1.74 LBS
6105-TB-1/2x12-J/J	2,200 LBS	1/2"	12"	17-1/2"	30-1/2"	13.97 MM / 0.55"	26.92 MM / 1.06"	1.09 Kg / 2.4 LBS
6105-TB-5/8x6-J/J	3,500 LBS	5/8"	6"	12-3/4"	20"	20.83 MM / 0.82"	33.27 MM / 1.31"	1.23 Kg / 2.72 LBS
6105-TB-5/8x9-J/J	3,500 LBS	5/8"	9"	15-3/4"	26"	20.83 MM / 0.82"	33.27 MM / 1.31"	1.56 Kg / 3.43 LBS
6105-TB-5/8x12-J/J	3,500 LBS	5/8"	12"	18-3/4"	32"	20.83 MM / 0.82"	33.27 MM / 1.31"	1.77 Kg / 3.91 LBS
6105-TB-3/4x6-J/J	5,200 LBS	3/4"	6"	14"	21-1/2"	26.16 MM / 1.03"	38.1 MM / 1.5"	1.86 Kg / 4.11 LBS
6105-TB-3/4x9-J/J	5,200 LBS	3/4"	9"	17"	27-1/2"	26.16 MM / 1.03"	38.1 MM / 1.5"	2.4 Kg / 5.46 LBS
6105-TB-3/4x12-J/J	5,200 LBS	3/4"	12"	20"	33-1/2"	26.16 MM / 1.03"	38.1 MM / 1.5"	2.98 Kg / 6.56 LBS
6105-TB-3/4x18-J/J	5,200 LBS	3/4"	18"	26"	45-1/2"	26.16 MM / 1.03"	38.1 MM / 1.5"	3.64 Kg / 8.03 LBS
6105-TB-7/8x12-J/J	7,200 LBS	7/8"	12"	21-3/8"	35-1/8"	31.24 MM / 1.23"	44.45 MM / 1.75"	3.7 Kg / 8.17 LBS
6105-TB-7/8x18-J/J	7,200 LBS	7/8"	18"	27-3/8"	47-1/8"	31.24 MM / 1.23"	44.45 MM / 1.75"	4.89 Kg / 10.78 LBS
6105-TB-1x6-J/J	10,000 LBS	1"	6"	16-3/4"	24-3/4"	33.27 MM / 1.31"	54.86 MM / 2.16"	4.62 Kg / 10.18 LBS
6105-TB-1x12-J/J	10,000 LBS	1"	12"	22-3/4"	36-3/4"	33.27 MM / 1.31"	54.86 MM / 2.16"	5.96 Kg / 13.14 LBS
6105-TB-1x18-J/J	10,000 LBS	1"	18"	28-3/4"	48-3/4"	33.27 MM / 1.31"	54.86 MM / 2.16"	6.87 Kg / 15.14 LBS
6105-TB-1x24-J/J	10,000 LBS	1"	24"	34-3/4"	60-3/4"	33.27 MM / 1.31"	54.86 MM / 2.16"	8.2 Kg / 18.08 LBS
6105-TB-1-1/4x12-J/J	15,200 LBS	1-1/4"	12"	25-3/8"	39-7/8"	47.24 MM / 1.86"	71.37 MM / 2.81"	9.34 Kg / 20.59 LBS
6105-TB-1-1/4x18-J/J	15,200 LBS	1-1/4"	18"	31-3/8"	51-7/8"	47.24 MM / 1.86"	71.37 MM / 2.81"	11.19 Kg / 24.68 LBS
6105-TB-1-1/4x24-J/J	15,200 LBS	1-1/4"	24"	37-3/8"	63-7/8"	47.24 MM / 1.86"	71.37 MM / 2.81"	12.79 Kg / 28.2 LBS
6105-TB-1-1/2x12-J/J	21,400 LBS	1-1/2"	12"	26-1/2"	41-1/2"	57.15 MM / 2.25"	71.37 MM / 2.81"	13.92 Kg / 30.69 LBS
6105-TB-1-1/2x18-J/J	21,400 LBS	1-1/2"	18"	32-1/2"	53-1/2"	57.15 MM / 2.25"	71.37 MM / 2.81"	16.67 Kg / 36.75 LBS
6105-TB-1-1/2x24-J/J	21,400 LBS	1-1/2"	24"	38-1/2"	65-1/2"	57.15 MM / 2.25"	71.37 MM / 2.81"	18.87 Kg / 41.6 LBS
6105-TB-1-3/4x18-J/J	28,000 LBS	1-3/4"	18"	35-3/8"	53-3/8"	66.04 MM / 2.6"	85.85 MM / 3.38"	24.49 Kg / 54 LBS
6105-TB-1-3/4x24-J/J	28,000 LBS	1-3/4"	24"	41-3/8"	65-3/8"	66.04 MM / 2.6"	85.85 MM / 3.38"	28.74 Kg / 63.36 LBS
6105-TB-2x24-J/J	37,000 LBS	2"	24"	45-1/2"	69-1/2"	66.55 MM / 2.62"	93.73 MM / 3.69"	42.75 Kg / 94.25 LBS
6105-TB-2-1/2x24-J/J	60,000 LBS	2-1/2"	24"	49"	73"	77.72 MM / 3.06"	112.78 MM / 4.44"	74.84 Kg / 165 LBS
6105-TB-2-3/4x24-J/J	75,000 LBS	2-3/4"	24"	50-3/4"	74-3/4"	93.47 MM / 3.68"	106.43 MM / 4.19"	89.81 Kg / 198 LBS

Minimum Break Strength (MBS): 5 x WLL

MATERIAL: FORGED STEEL
FINISH: HOT-DIP GALVANIZED (HDG)