


SWIVEL - EYE / EYE



MODEL	SIZE	WORKING LOAD LIMIT	WEIGHT
6106-SW-1/4-E/E	1/4"	850 LBS	0.1 Kg / 0.21 LBS
6106-SW-5/16-E/E	5/16"	1,250 LBS	0.18 Kg / 0.39 LBS
6106-SW-3/8-E/E	3/8"	2,250 LBS	0.34 Kg / 0.75 LBS
6106-SW-1/2-E/E	1/2"	3,600 LBS	0.65 Kg / 1.43 LBS
6106-SW-5/8-E/E	5/8"	5,200 LBS	1.13 Kg / 2.5 LBS
6106-SW-3/4-E/E	3/4"	7,200 LBS	1.87 Kg / 4.13 LBS
6106-SW-7/8-E/E	7/8"	10,000 LBS	2.83 Kg / 6.25 LBS
6106-SW-1-E/E	1"	12,500 LBS	4.06 Kg / 8.95 LBS
6106-SW-1-1/8-E/E	1-1/8"	16,500 LBS	4.99 Kg / 11 LBS
6106-SW-1-1/4-E/E	1-1/4"	18,000 LBS	7.43 Kg / 16.37 LBS
6106-SW-1-1/2-E/E	1-1/2"	45,200 LBS	22.25 Kg / 49.06 LBS

SWIVEL - JAW / EYE



MODEL	SIZE	WORKING LOAD LIMIT	WEIGHT
6106-SW-1/4-J/E	1/4"	850 LBS	0.1 Kg / 0.21 LBS
6106-SW-5/16-J/E	5/16"	1,250 LBS	0.15 Kg / 0.34 LBS
6106-SW-3/8-J/E	3/8"	2,250 LBS	0.3 Kg / 0.66 LBS
6106-SW-1/2-J/E	1/2"	3,600 LBS	0.61 Kg / 1.34 LBS
6106-SW-5/8-J/E	5/8"	5,200 LBS	1.12 Kg / 2.48 LBS
6106-SW-3/4-J/E	3/4"	7,200 LBS	1.76 Kg / 3.88 LBS
6106-SW-7/8-J/E	7/8"	10,000 LBS	2.66 Kg / 5.87 LBS
6106-SW-1-J/E	1"	12,500 LBS	4.46 Kg / 9.84 LBS
6106-SW-1-1/8-J/E	1-1/8"	16,500 LBS	5.8 Kg / 12.8 LBS
6106-SW-1-1/4-J/E	1-1/4"	18,000 LBS	7.14 Kg / 15.75 LBS
6106-SW-1-1/2-J/E	1-1/2"	45,200 LBS	24.83 Kg / 54.75 LBS


SWIVEL - RING / EYE



MODEL	SIZE	WORKING LOAD LIMIT	WEIGHT
6106-SW-1/4-R/E	1/4"	850 LBS	0.06 Kg / 0.13 LBS
6106-SW-5/16-R/E	5/16"	1,250 LBS	0.12 Kg / 0.26 LBS
6106-SW-3/8-R/E	3/8"	2,250 LBS	0.25 Kg / 0.55 LBS
6106-SW-1/2-R/E	1/2"	3,600 LBS	0.51 Kg / 1.12 LBS
6106-SW-5/8-R/E	5/8"	5,200 LBS	0.95 Kg / 2.09 LBS
6106-SW-3/4-R/E	3/4"	7,200 LBS	1.45 Kg / 3.19 LBS
6106-SW-7/8-R/E	7/8"	10,000 LBS	2.3 Kg / 5.06 LBS
6106-SW-1-R/E	1"	12,500 LBS	3.6 Kg / 7.94 LBS
6106-SW-1-1/8-R/E	1-1/8"	16,500 LBS	5.44 Kg / 11.99 LBS
6106-SW-1-1/4-R/E	1-1/4"	18,000 LBS	6.99 Kg / 15.4 LBS
6106-SW-1-1/2-R/E	1-1/2"	45,200 LBS	15.01 Kg / 33.09 LBS

MBS: 5 x WLL


MATERIAL: FORGED STEEL
FINISH: HOT-DIP GALVANIZED (HDG)

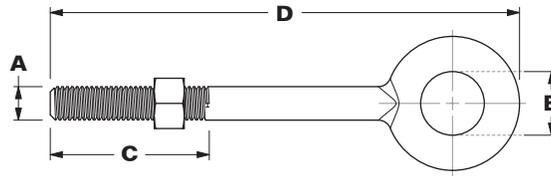

MODEL	WORKING LOAD LIMIT	WEIGHT PER 100	DIMENSIONS			
			A	B	C	D
6106-EB-1/4 x 2	500 LBS	3.71 Kg / 8.2 LBS	Ø6.3 MM / 0.25"	Ø12.7 MM / 0.5"	38.1 MM / 1.5"	77.72 MM / 3.06"
6106-EB-1/4 x 4	500 LBS	5.31 Kg / 11.7 LBS	Ø6.3 MM / 0.25"	Ø12.7 MM / 0.5"	63.5 MM / 2.5"	128.52 MM / 5.06"
6106-EB-5/16 x 2-1/4	800 LBS	6.03 Kg / 13.3 LBS	Ø7.9 MM / 0.31"	Ø15.8 MM / 0.62"	38.1 MM / 1.5"	90.42 MM / 3.56"
6106-EB-5/16 x 4-1/4	800 LBS	11.34 Kg / 25 LBS	Ø7.9 MM / 0.31"	Ø15.8 MM / 0.62"	63.5 MM / 2.5"	114.22 MM / 5.56"
6106-EB-3/8 x 2-1/2	1,200 LBS	10.57 Kg / 23.3 LBS	Ø9.5 MM / 0.38"	Ø19 MM / 0.75"	38.1 MM / 1.5"	104.65 MM / 4.12"
6106-EB-3/8 x 4-1/2	1,200 LBS	13.38 Kg / 29.5 LBS	Ø9.5 MM / 0.38"	Ø19 MM / 0.75"	63.5 MM / 2.5"	155.45 MM / 6.12"
6106-EB-3/8 x 6	1,200 LBS	15.97 Kg / 35.2 LBS	Ø9.5 MM / 0.38"	Ø19 MM / 0.75"	63.5 MM / 2.5"	193.55 MM / 7.62"
6106-EB-1/2 x 3-1/4	2,200 LBS	22.82 Kg / 50.3 LBS	Ø12.7 MM / 0.5"	Ø25.4 MM / 1"	38.1 MM / 1.5"	136.65 MM / 5.38"
6106-EB-1/2 x 6	2,200 LBS	29.98 Kg / 66.1 LBS	Ø12.7 MM / 0.5"	Ø25.4 MM / 1"	76.2 MM / 3"	206.25 MM / 8.12"
6106-EB-1/2 x 8	2,200 LBS	37.19 Kg / 82 LBS	Ø12.7 MM / 0.5"	Ø25.4 MM / 1"	76.2 MM / 3"	257.05 MM / 10.12"
6106-EB-1/2 x 10	2,200 LBS	39.92 Kg / 88 LBS	Ø12.7 MM / 0.5"	Ø25.4 MM / 1"	76.2 MM / 3"	307.85 MM / 12.12"
6106-EB-1/2 x 12	2,200 LBS	51.8 Kg / 114.2 LBS	Ø12.7 MM / 0.5"	Ø25.4 MM / 1"	76.2 MM / 3"	358.65 MM / 14.12"
6106-EB-1/2 x 15	2,200 LBS	53 Kg / 116.85 LBS	Ø12.7 MM / 0.5"	Ø25.4 MM / 1"	101.6 MM / 4"	434.85 MM / 17.12"
6106-EB-5/8 x 4	3,500 LBS	46.77 Kg / 103.1 LBS	Ø15.8 MM / 0.62"	Ø31.7 MM / 1.25"	50.8 MM / 2"	169.93 MM / 6.69"
6106-EB-5/8 x 6	3,500 LBS	53.61 Kg / 118.2 LBS	Ø15.8 MM / 0.62"	Ø31.7 MM / 1.25"	76.2 MM / 3"	220.73 MM / 8.69"
6106-EB-5/8 x 8	3,500 LBS	61.28 Kg / 135.1 LBS	Ø15.8 MM / 0.62"	Ø31.7 MM / 1.25"	76.2 MM / 3"	271.53 MM / 10.69"
6106-EB-5/8 x 10	3,500 LBS	69.67 Kg / 153.6 LBS	Ø15.8 MM / 0.62"	Ø31.7 MM / 1.25"	76.2 MM / 3"	322.33 MM / 12.69"
6106-EB-5/8 x 12	3,500 LBS	75.79 Kg / 167.1 LBS	Ø15.8 MM / 0.62"	Ø31.7 MM / 1.25"	101.6 MM / 4"	373.13 MM / 14.69"
6106-EB-5/8 x 15	3,500 LBS	91.24 Kg / 201.16 LBS	Ø15.8 MM / 0.62"	Ø31.7 MM / 1.25"	127 MM / 5"	449.33 MM / 17.69"
6106-EB-5/8 x 24	3,500 LBS	126.6 Kg / 279.1 LBS	Ø15.8 MM / 0.62"	Ø31.7 MM / 1.25"	152.4 MM / 6"	677.93 MM / 26.69"
6106-EB-3/4 x 4-1/2	5,200 LBS	76.48 Kg / 168.6 LBS	Ø19 MM / 0.75"	Ø38.1 MM / 1.5"	50.8 MM / 2"	195.33 MM / 7.69"
6106-EB-3/4 x 6	5,200 LBS	83.69 Kg / 184.5 LBS	Ø19 MM / 0.75"	Ø38.1 MM / 1.5"	76.2 MM / 3"	233.43 MM / 9.19"
6106-EB-3/4 x 8	5,200 LBS	94.3 Kg / 207.9 LBS	Ø19 MM / 0.75"	Ø38.1 MM / 1.5"	76.2 MM / 3"	284.23 MM / 11.19"
6106-EB-3/4 x 10	5,200 LBS	106.6 Kg / 235 LBS	Ø19 MM / 0.75"	Ø38.1 MM / 1.5"	76.2 MM / 3"	335.03 MM / 13.19"
6106-EB-3/4 x 12	5,200 LBS	116.8 Kg / 257.5 LBS	Ø19 MM / 0.75"	Ø38.1 MM / 1.5"	101.6 MM / 4"	385.83 MM / 15.19"
6106-EB-3/4 x 15	5,200 LBS	135.17 Kg / 298 LBS	Ø19 MM / 0.75"	Ø38.1 MM / 1.5"	127.0 MM / 5"	462.03 MM / 18.19"
6106-EB-7/8 x 5	7,200 LBS	122.47 Kg / 270 LBS	Ø22.3 MM / 0.88"	Ø44.5 MM / 1.75"	63.5 MM / 2.5"	222.25 MM / 8.75"
6106-EB-7/8 x 8	7,200 LBS	139.71 Kg / 308 LBS	Ø22.3 MM / 0.88"	Ø44.5 MM / 1.75"	101.6 MM / 4"	298.45 MM / 11.75"
6106-EB-7/8 x 12	7,200 LBS	181.44 Kg / 400 LBS	Ø22.3 MM / 0.88"	Ø44.5 MM / 1.75"	101.6 MM / 4"	400.05 MM / 15.75"
6106-EB-1 x 6	10,000 LBS	190.96 Kg / 421 LBS	Ø25.4 MM / 1"	Ø50.8 MM / 2"	76.2 MM / 3"	261.87 MM / 10.31"
6106-EB-1 x 9	10,000 LBS	212.51 Kg / 468.5 LBS	Ø25.4 MM / 1"	Ø50.8 MM / 2"	101.6 MM / 4"	338.07 MM / 13.31"
6106-EB-1 x 12	10,000 LBS	244.94 Kg / 540 LBS	Ø25.4 MM / 1"	Ø50.8 MM / 2"	101.6 MM / 4"	414.27 MM / 16.31"
6106-EB-1 x 18	10,000 LBS	294.84 Kg / 650 LBS	Ø25.4 MM / 1"	Ø50.8 MM / 2"	177.8 MM / 7"	566.67 MM / 22.3"
6106-EB-1-1/4 x 8	15,200 LBS	340.19 Kg / 750 LBS	Ø31.7 MM / 1.25"	Ø63.5 MM / 2.5"	101.6 MM / 4"	339.85 MM / 13.38"
6106-EB-1-1/4 x 12	15,200 LBS	408.23 Kg / 900 LBS	Ø31.7 MM / 1.25"	Ø63.5 MM / 2.5"	101.6 MM / 4"	441.45 MM / 17.38"
6106-EB-1-1/4 x 20	15,200 LBS	548.85 Kg / 1,210 LBS	Ø31.7 MM / 1.25"	Ø63.5 MM / 2.5"	152.4 MM / 6"	644.65 MM / 25.38"


MBS: 5 x WLL

MATERIAL: FORGED STEEL
FINISH: HOT-DIP GALVANIZED (HDG)

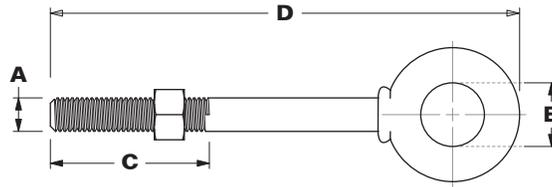

MODEL	WORKING LOAD LIMIT	WEIGHT PER 100	DIMENSIONS			
			A	B	C	D
6106-EBS-1/4 x 2	500 LBS	2.99 Kg / 6.6 LBS	Ø6.3 MM / 0.25"	Ø12.7 MM / 0.5"	38.1 MM / 1.5"	74.68 MM / 2.94"
6106-EBS-1/4 x 4	500 LBS	4.13 Kg / 9.1 LBS	Ø6.3 MM / 0.25"	Ø12.7 MM / 0.5"	63.5 MM / 2.5"	125.5 MM / 4.94"
6106-EBS-5/16 x 2-1/4	800 LBS	5.67 Kg / 12.5 LBS	Ø7.9 MM / 0.31"	Ø15.8 MM / 0.62"	38.1 MM / 1.5"	88.9 MM / 3.5"
6106-EBS-5/16 x 4-1/4	800 LBS	8.53 Kg / 18.8 LBS	Ø7.9 MM / 0.31"	Ø15.8 MM / 0.62"	63.5 MM / 2.5"	139.7 MM / 5.5"
6106-EBS-3/8 x 2-1/2	1,200 LBS	9.71 Kg / 21.4 LBS	Ø9.5 MM / 0.38"	Ø19 MM / 0.75"	38.1 MM / 1.5"	100.8 MM / 3.97"
6106-EBS-3/8 x 4-1/2	1,200 LBS	11.47 Kg / 25.3 LBS	Ø9.5 MM / 0.38"	Ø19 MM / 0.75"	63.5 MM / 2.5"	151.6 MM / 5.97"
6106-EBS-1/2 x 3-1/4	2,200 LBS	19.32 Kg / 42.6 LBS	Ø12.7 MM / 0.5"	Ø25.4 MM / 1"	38.1 MM / 1.5"	130.1 MM / 5.12"
6106-EBS-1/2 x 6	2,200 LBS	25.76 Kg / 56.8 LBS	Ø12.7 MM / 0.5"	Ø25.4 MM / 1"	76.2 MM / 3"	200.2 MM / 7.88"
6106-EBS-5/8 x 4	3,500 LBS	31.12 Kg / 68.6 LBS	Ø15.8 MM / 0.62"	Ø31.7 MM / 1.25"	50.8 MM / 2"	163.6 MM / 6.44"
6106-EBS-5/8 x 6	3,500 LBS	46.44 Kg / 102.4 LBS	Ø15.8 MM / 0.62"	Ø31.7 MM / 1.25"	76.2 MM / 3"	214.9 MM / 8.44"
6106-EBS-3/4 x 4-1/2	5,200 LBS	65.54 Kg / 144.5 LBS	Ø19 MM / 0.75"	Ø38.1 MM / 1.5"	50.8 MM / 2"	188.9 MM / 7.44"
6106-EBS-3/4 x 6	5,200 LBS	75.97 Kg / 167.5 LBS	Ø19 MM / 0.75"	Ø38.1 MM / 1.5"	76.2 MM / 3"	227.1 MM / 8.94"
6106-EBS-7/8 x 5	7,200 LBS	102.6 Kg / 225 LBS	Ø22.3 MM / 0.88"	Ø44.5 MM / 1.75"	63.5 MM / 2.5"	214.9 MM / 8.46"
6106-EBS-1 x 6	10,000 LBS	166.15 Kg / 366.3 LBS	Ø25.4 MM / 1"	Ø50.8 MM / 2"	76.2 MM / 3"	253.2 MM / 9.97"
6106-EBS-1 x 9	10,000 LBS	191.64 Kg / 422.5 LBS	Ø25.4 MM / 1"	Ø50.8 MM / 2"	101.6 MM / 4"	329.4 MM / 12.97"
6106-EBS-1-1/4 x 8	15,200 LBS	294.84 Kg / 650 LBS	Ø31.7 MM / 1.25"	Ø63.5 MM / 2.5"	101.6 MM / 3"	323.1 MM / 12.7"
6106-EBS-1-1/4 x 12	15,200 LBS	360.61 Kg / 795 LBS	Ø31.7 MM / 1.25"	Ø63.5 MM / 2.5"	101.6 MM / 3"	424.7 MM / 16.72"
6106-EBS-1-1/2 x 15	21,400 LBS	646.37 Kg / 1,425 LBS	Ø38.1 MM / 1.5"	Ø76.2 MM / 3"	152.4 MM / 6"	527.1 MM / 20.75"

MACHINERY TYPE



MODEL	WORKING LOAD LIMIT	THREAD LENGTH	EYE I.D.	WEIGHT
6106-EBSM-1/4 x 1	650 LBS	25.4 MM / 1"	Ø22.4 MM / 0.88"	0.015 Kg / 0.032 LBS
6106-EBSM-5/16 x 1-1/8	1,200 LBS	28.7 MM / 1.13"	Ø28.5 MM / 1.12"	0.028 Kg / 0.062 LBS
6106-EBSM-3/8 x 1-1/4	1,550 LBS	31.8 MM / 1.25"	Ø35.1 MM / 1.38"	0.057 Kg / 0.125 LBS
6106-EBSM-1/2 x 1-1/2	2,600 LBS	38.1 MM / 1.5"	Ø44.5 MM / 1.75"	0.113 Kg / 0.25 LBS
6106-EBSM-5/8 x 1-3/4	5,200 LBS	44.5 MM / 1.75"	Ø57.2 MM / 2.25"	0.227 Kg / 0.5 LBS
6106-EBSM-3/4 x 2	7,200 LBS	50.8 MM / 2"	Ø69.9 MM / 2.75"	0.397 Kg / 0.875 LBS
6106-EBSM-7/8 x 2-1/4	10,600 LBS	57.2 MM / 2.25"	Ø82.6 MM / 3.25"	0.68 Kg / 1.5 LBS
6106-EBSM-1 x 2 1/2	13,300 LBS	63.5 MM / 2.5"	Ø95.3 MM / 3.75"	0.988 Kg / 2.18 LBS
6106-EBSM-1-1/4 x 3	21,000 LBS	76.2 MM / 3"	Ø114.3 MM / 4.5"	1.723 Kg / 3 LBS
6106-EBSM-1-1/2 x 3-1/2	24,000 LBS	88.9 MM / 3.5"	Ø139.7 MM / 5.5"	3.175 Kg / 7 LBS

MBS: 5 x WLL

MATERIAL: FORGED STEEL
FINISH: HOT-DIP GALVANIZED (HDG)