

LOCKING ROD ASSEMBLY

LEFT & RIGHT LOCKING

8' 6" & 9' 6" ISO REEFERS


1400

MODEL	SIZE	FITS	BRACKET TYPE	WEIGHT	L1	L2	L3
1401-6658-LL/-RL	8' 6"	HYUNDAI	1	19.43 LBS 8.81 Kg	92 5/8" 2,353 MM	71 3/8" 1,813 MM	14 1/8" 358.8 MM
1401-6659-LL/-RL	8' 6"	HYUNDAI	1	19.43 LBS 8.81 Kg	92 5/8" 2,353 MM	71 3/8" 1,813 MM	21 1/4" 539.8 MM
1401-6660-LL	8' 6"	FRUEHAUF	1	19.43 LBS 8.81 Kg	92 5/8" 2,353 MM	71 3/8" 1,813 MM	13 7/8" 352.4 MM
1401-6660-RL	8' 6"	FRUEHAUF	1	19.43 LBS 8.81 Kg	92 5/8" 2,353 MM	71 3/8" 1,813 MM	19 3/4" 501.7 MM
1401-6663-LL/-RL	9' 6"	HYUNDAI	1	22.00 LBS 9.98 Kg	105 5/16" 2,675 MM	84 1/16" 2,135 MM	14 5/16" 363.5 MM
1401-6664-LL/-RL	9' 6"	MCIQ	1	22.18 LBS 10.06 Kg	106 1/4" 2,699 MM	85" 2,159 MM	18 1/4" 463.6 MM
1401-6665-LL/-RL	9' 6"	SINGAMAS	1	22.14 LBS 10.04 Kg	106 1/16" 2,694 MM	84 13/16" 2,154 MM	21 1/2" 546.1 MM
1401-6666-LL	9' 6"	FRUEHAUF	1	22.16 LBS 10.05 Kg	106 3/16" 2,697 MM	84 15/16" 2,157 MM	13 7/8" 352.4 MM
1401-6666-RL	9' 6"	FRUEHAUF	1	22.16 LBS 10.05 Kg	106 3/16" 2,697 MM	84 15/16" 2,157 MM	19 3/4" 501.7 MM
1401-6667-LL/-RL	9' 6"	CIMC	2	22.32 LBS 10.12 Kg	105 1/8" 2,670 MM	83 7/8" 2,130 MM	19 3/4" 501.7 MM
1401-6684-RL-L/-LL-R	9' 6"	CIMC	2	22.4 LBS 10.16 Kg	105 1/4" 2,673 MM	84" 2,133 MM	21 9/16" 548 MM
1401-6684-RL-R/-LL-L	9' 6"	CIMC	2	22.4 LBS 10.16 Kg	105 1/4" 2,673 MM	84" 2,133 MM	14 1/2" 368 MM



NOTE: RL = RIGHT LOCKING, LL = LEFT LOCKING
-R = FITTED ON RIGHT DOOR, -L = FITTED ON LEFT DOOR


MATERIAL: STANDARD STEEL
FINISH: HOT DIPPED GALVANIZED

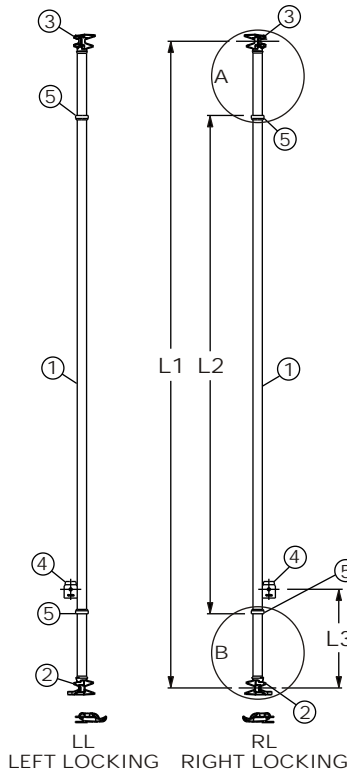

TYPE 1

ITEM NO.	QTY.	PART NO.
1	1	1401-2971 PIPE, LOCK ROD
2	1	1401-1992-L CAM W/ SECURITY HOLE
3	1	1401-6968-R CAM
4	1	1401-2586 HANDLE HUB BRACKET
5	2	1401-2172 ANTI-RACK RING

TYPE 1 LOCKRODS ARE DESIGNED FOR 6-HOLE BEARING BRACKET WITH CRIMPED END (OLD STYLE) (BUI # 1401-2542) HENCE ONLY ONE ANTI-RACK RING AT EACH END.

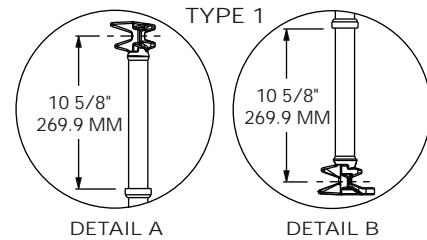

TYPE 2

ITEM NO.	QTY.	PART NO.
1	1	1401-2971 PIPE, LOCK ROD
2	1	1401-1992-L CAM W/ SECURITY HOLE
3	1	1401-6968-R CAM
4	1	1401-2586 HANDLE HUB BRACKET
5	4	1401-2172 ANTI-RACK RING

TYPE 2 LOCKRODS ARE DESIGNED FOR 6-HOLE BEARING BRACKET WITHOUT CRIMPED END (NEW STYLE) (BUI # 1401-7030) HENCE TWO ANTI-RACK RINGS AT EACH END.

