





# 2" RATCHET STRAP ASSEMBLIES w/ FLAT HOOKS, WIRE HOOKS & CHAIN ANCHORS

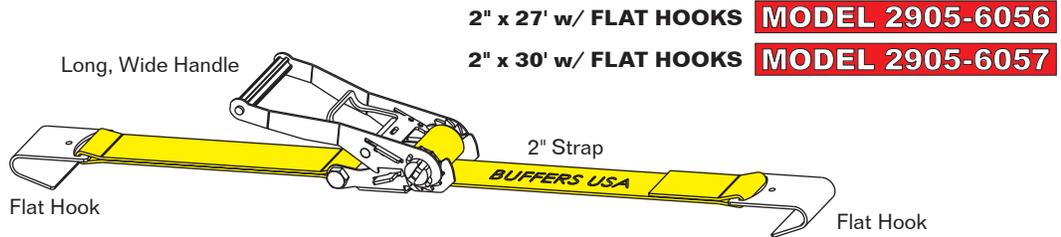


**SUB 2905-6056 FOR:** ANCRA 45982-10, KINEDYNE 512720, MULTIPRENS 5822-27  
**SUB 2905-6057 FOR:** ANCRA 45982-11, KINEDYNE 513020, MULTIPRENS 5822-30

**STRAP COLOR: YELLOW**

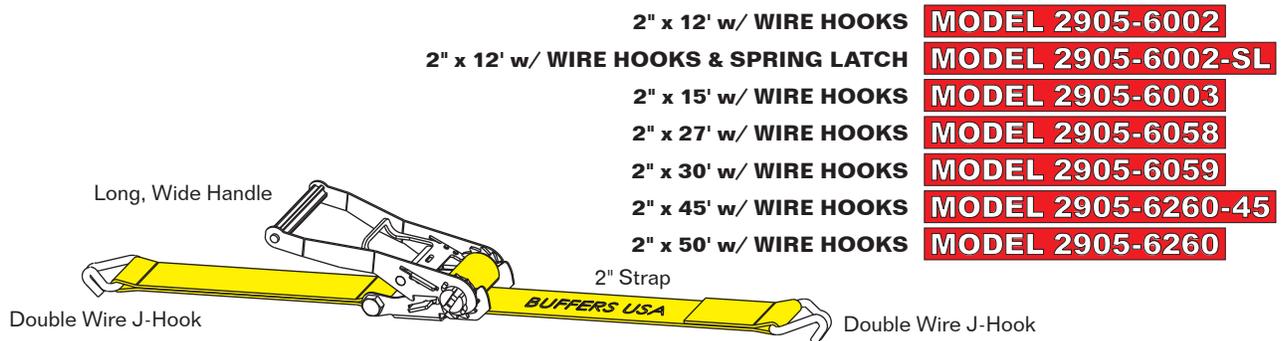

**SUB 2905-6058 FOR:** ANCRA 45982-45, KINEDYNE 512784, MULTIPRENS 5826-27  
**SUB 2905-6059 FOR:** ANCRA 45982-43, KINEDYNE 513084, MULTIPRENS 5826-30

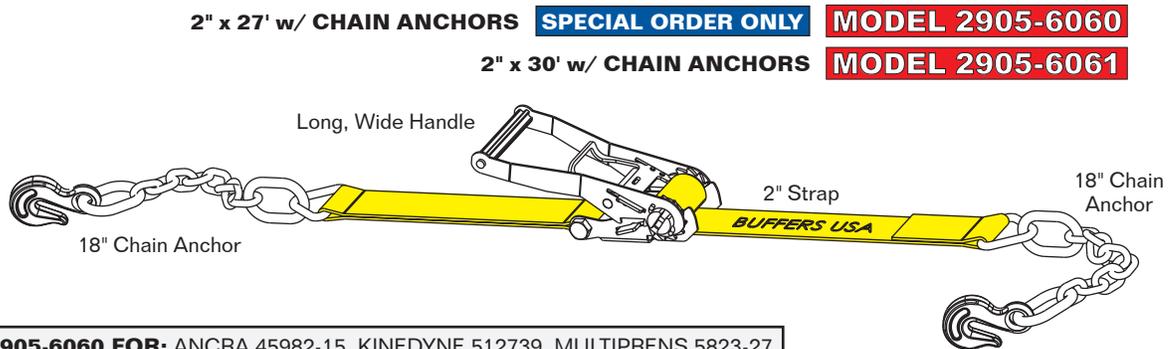


**SUB 2905-6060 FOR:** ANCRA 45982-15, KINEDYNE 512739, MULTIPRENS 5823-27  
**SUB 2905-6061 FOR:** ANCRA 45982-34, KINEDYNE 513039, MULTIPRENS 5823-30

**STRAP COLOR: YELLOW**

**WORKING LOAD LIMIT (WLL):** 3,333 LBS / 1,511 Kg  
**BREAK STRENGTH (BS):** 10,000 LBS / 4,535 Kg

**NOTE:**  
 FOR LOAD SECURING ONLY, NOT FOR LIFTING.  
 ALL RATCHET STRAP ASSEMBLIES SHOULD BE  
 INSPECTED FOR FRAYS, CUTS, OR DAMAGED  
 HARDWARE BEFORE AND AFTER USING.

DESIGNED TO MEET OR EXCEED WSTDA T-4 STANDARD.  
 COMPLIES WITH DOT AND CA HIGHWAY PATROL TITLE 13.

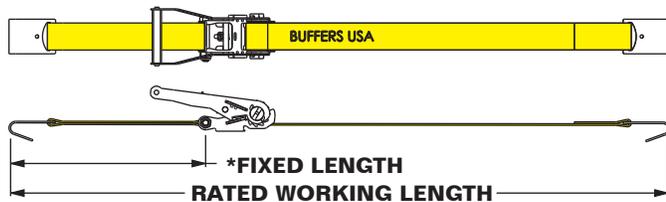

\*FIXED LENGTH 18" EXCEPT  
 w/ CHAIN ANCHOR 33"






# 2" RATCHET STRAP ASSEMBLIES

w/ GRAB HOOKS, DELTA RINGS & SNAP HOOKS

**2" x 27' w/ GRAB HOOKS** **MODEL 2905-6062**

**SPECIAL ORDER ONLY** **2" x 30' w/ GRAB HOOKS** **MODEL 2905-6063**

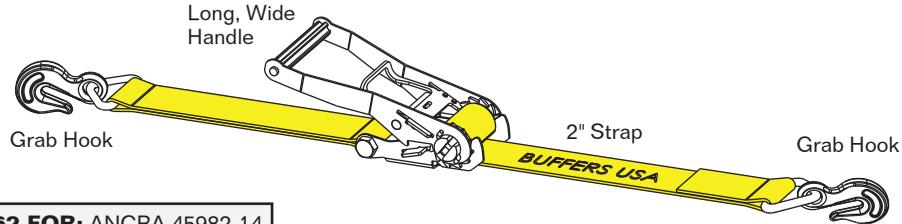


**SUB 2905-6062 FOR:** ANCRA 45982-14  
**SUB 2905-6063 FOR:** ANCRA 45982-34

**STRAP COLOR:** YELLOW

**SPECIAL ORDER ONLY** **2" x 27' w/ DELTA RINGS** **MODEL 2905-6064**

**2" x 30' w/ DELTA RINGS** **MODEL 2905-6065**

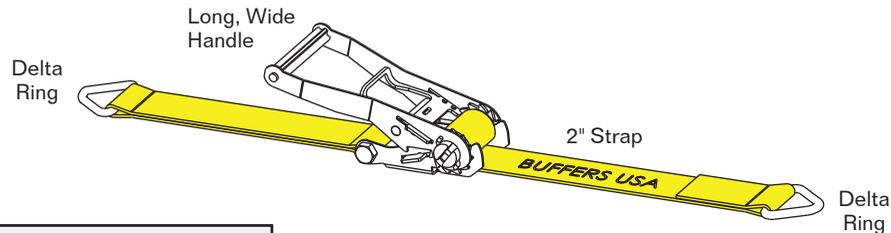


**SUB 2905-6064 FOR:** ANCRA 45982-16  
**SUB 2905-6065 FOR:** ANCRA 45982-35

**STRAP COLOR:** YELLOW

**SPECIAL ORDER ONLY** **2" x 27' w/ SNAP HOOKS** **MODEL 2905-6066**

**2" x 30' w/ SNAP HOOKS** **MODEL 2905-6067**

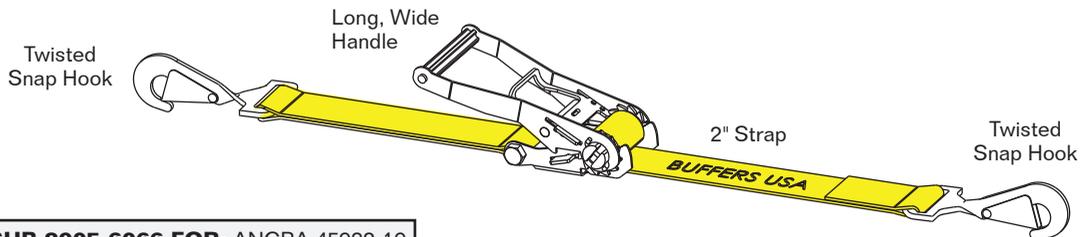

**SUB 2905-6066 FOR:** ANCRA 45982-19  
**SUB 2905-6067 FOR:** ANCRA 45982-36

**STRAP COLOR:** YELLOW

**WORKING LOAD LIMIT (WLL):** 3,333 LBS / 1,511 Kg  
**BREAK STRENGTH (BS):** 10,000 LBS / 4,535 Kg

**NOTE:**

FOR LOAD SECURING ONLY, NOT FOR LIFTING.  
ALL RATCHET STRAP ASSEMBLIES SHOULD BE INSPECTED FOR FRAYS, CUTS, OR DAMAGED HARDWARE BEFORE AND AFTER USING.

DESIGNED TO MEET OR EXCEED WSTDA T-4 STANDARD.  
COMPLIES WITH DOT AND CA HIGHWAY PATROL TITLE 13.



\*FIXED LENGTH 18" EXCEPT  
w/ CHAIN ANCHOR 33"

# BUFFERS USA INC

"The Intermodal Hardware Specialists"

**2905-2**



**904-696-0010**

E-mail: [sales@buffersusa.com](mailto:sales@buffersusa.com)




# 3" RATCHET STRAP ASSEMBLIES w/ FLAT HOOKS & CHAIN ANCHORS

**SPECIAL ORDER ONLY** 3" x 27' w/ FLAT HOOKS **MODEL 2905-6068**

3" x 30' w/ FLAT HOOKS **MODEL 2905-6069**

3" x 30' w/ FLAT HOOKS & SHORT HANDLE **MODEL 2905-6069-SHR**

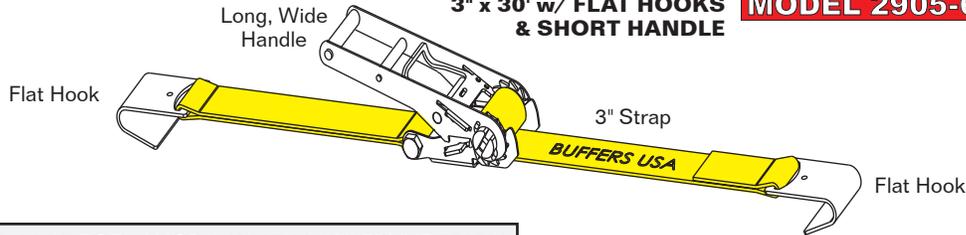


**SUB 2905-6068 FOR:** ANCRA 48987-20, KINEDYNE 552721  
**SUB 2905-6069 FOR:** ANCRA 48987-21, KINEDYNE 553021

**STRAP COLOR: YELLOW**

**SPECIAL ORDER ONLY** 3" x 27' w/ CHAIN ANCHORS **MODEL 2905-6072**

**SPECIAL ORDER ONLY** 3" x 30' w/ CHAIN ANCHORS **MODEL 2905-6073**

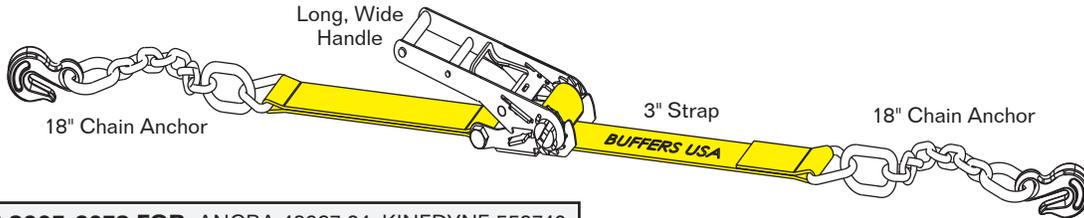


**SUB 2905-6072 FOR:** ANCRA 48987-24, KINEDYNE 552740  
**SUB 2905-6073 FOR:** ANCRA 48987-25, KINEDYNE 553040

**STRAP COLOR: YELLOW**

**WORKING LOAD LIMIT (WLL):** 4,333 LBS / 1,965 Kg  
**BREAK STRENGTH (BS):** 13,000 LBS / 5,896 Kg

**NOTE:**  
FOR LOAD SECURING ONLY, NOT FOR LIFTING.  
ALL RATCHET STRAP ASSEMBLIES SHOULD BE  
INSPECTED FOR FRAYS, CUTS, OR DAMAGED  
HARDWARE BEFORE AND AFTER USING.

DESIGNED TO MEET OR EXCEED WSTDA T-4 STANDARD.  
COMPLIES WITH DOT AND CA HIGHWAY PATROL TITLE 13.

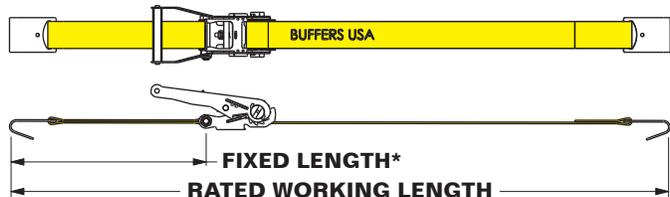

\*FIXED LENGTH 18" EXCEPT  
w/ CHAIN ANCHOR 33"

# BUFFERS USA INC

"The Intermodal Hardware Specialists"

**2905-3**



**904-696-0010**


E-mail: [sales@buffersusa.com](mailto:sales@buffersusa.com)

2/15/24




# 4" RATCHET STRAP ASSEMBLIES

w/ FLAT HOOKS, WIRE HOOKS, CHAIN ANCHORS  
GRAB HOOKS & DELTA RINGS

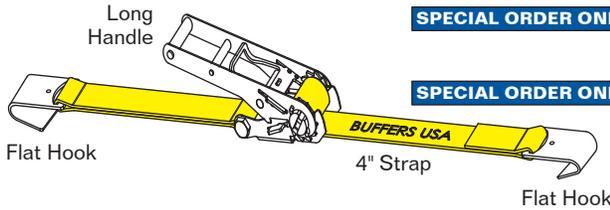

- SPECIAL ORDER ONLY** 4" x 27' w/ FLAT HOOKS **MODEL 2905-6080**
- 4" x 30' w/ FLAT HOOKS **MODEL 2905-6081**
- SPECIAL ORDER ONLY** 4" x 40' w/ FLAT HOOKS **MODEL 2905-6081-40**


**SUB 2905-6080 FOR:** ANCRA 49346-10, KINEDYNE 592721  
**SUB 2905-6081 FOR:** ANCRA 49346-11, KINEDYNE 593021

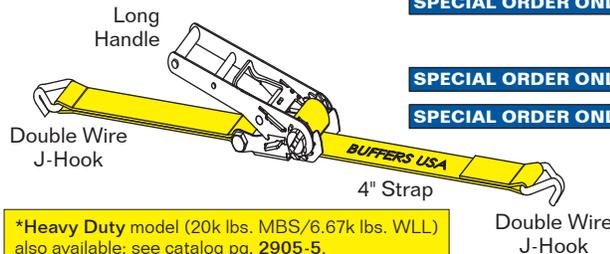

- SPECIAL ORDER ONLY** 4" x 20' w/ WIRE HOOKS **MODEL 2905-6082-20**
- SPECIAL ORDER ONLY** 4" x 25' w/ WIRE HOOKS **MODEL 2905-6082-25**
- SPECIAL ORDER ONLY** 4" x 27' w/ WIRE HOOKS **MODEL 2905-6082**
- 4" x 30' w/ WIRE HOOKS **MODEL 2905-6083\***
- SPECIAL ORDER ONLY** 4" x 40' w/ WIRE HOOKS **MODEL 2905-6082-40**
- SPECIAL ORDER ONLY** 4" x 50' w/ WIRE HOOKS **MODEL 2905-6082-50**
- 4" x 65' w/ WIRE HOOKS **MODEL 2905-6082-65**

**\*Heavy Duty model (20k lbs. MBS/6.67k lbs. WLL)**  
also available; see catalog pg. 2905-5.


**SUB 2905-6082 FOR:** ANCRA 49346-12, KINEDYNE 592736  
**SUB 2905-6083 FOR:** ANCRA 49346-13, KINEDYNE 593036

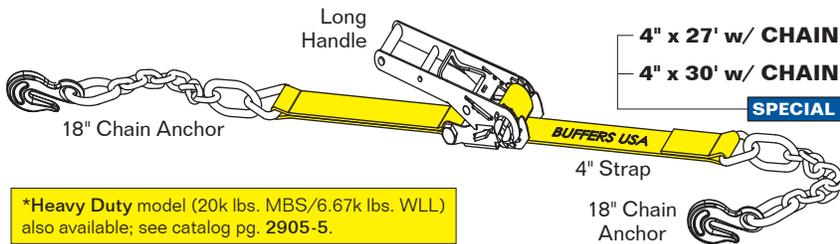

- 4" x 27' w/ CHAIN ANCHORS **MODEL 2905-6084**
  - 4" x 30' w/ CHAIN ANCHORS **MODEL 2905-6085\***
- SPECIAL ORDER ONLY**


**\*Heavy Duty model (20k lbs. MBS/6.67k lbs. WLL)**  
also available; see catalog pg. 2905-5.

**SUB 2905-6084 FOR:** ANCRA 49346-14  
**SUB 2905-6085 FOR:** ANCRA 49346-15

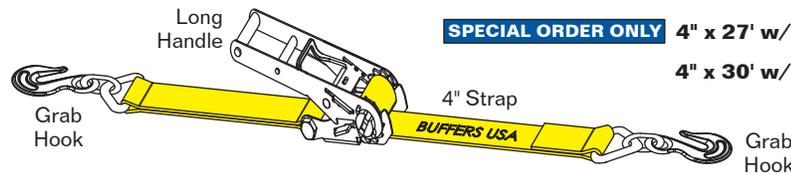

- SPECIAL ORDER ONLY** 4" x 27' w/ GRAB HOOKS **MODEL 2905-6086**
- 4" x 30' w/ GRAB HOOKS **MODEL 2905-6087**

**SUB 2905-6086 FOR:** ANCRA 49346-16  
**SUB 2905-6087 FOR:** ANCRA 49346-17

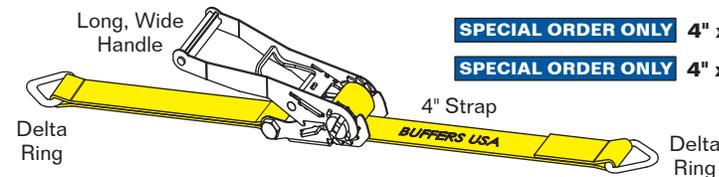

- SPECIAL ORDER ONLY** 4" x 27' w/ DELTA RINGS **MODEL 2905-6088**
- SPECIAL ORDER ONLY** 4" x 30' w/ DELTA RINGS **MODEL 2905-6089**

**SUB 2905-6088 FOR:** ANCRA 49246-16  
**SUB 2905-6089 FOR:** ANCRA 49246-17

**WORKING LOAD LIMIT (WLL):** 5,400 LBS / 2,449 Kg  
**BREAK STRENGTH (BS):** 16,200 LBS / 7,348 Kg  
**STRAP COLOR:** YELLOW

**NOTE:** For load securing only; **NOT** for lifting.  
 All ratchet strap assemblies should be inspected for frays, cuts or damaged hardware before AND after using.

Designed to meet or exceed WSTDA T-4 Standard.  
 Complies with DOT and CA Highway Patrol Title 13.




\*Fixed Length ~18" except w/ Grab Hook ~23", and w/ Chain Anchor ~33"




# 4" RATCHET STRAP ASSEMBLIES

HEAVY DUTY w/ WIRE HOOKS & CHAIN ANCHORS

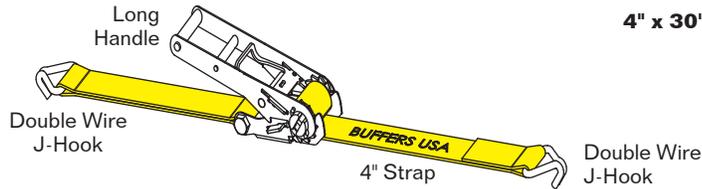

**4" x 30' w/ WIRE HOOKS MODEL 2905-6083-HD\***  
**HEAVY DUTY**

\*Standard Duty models (16.2k lbs. MBS/5.4k lbs. WLL) also available; see catalog pg. 2905-4.

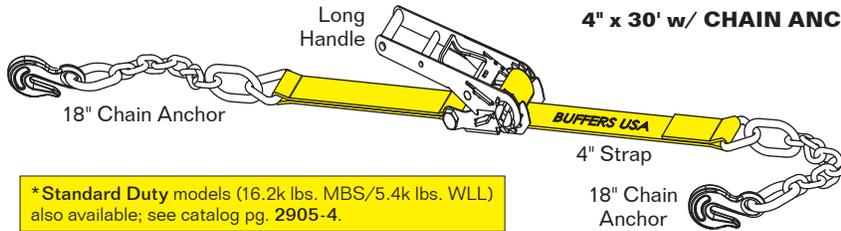

**4" x 30' w/ CHAIN ANCHORS MODEL 2905-6085-HD\***  
**HEAVY DUTY**

**SPECIAL ORDER ONLY**

\*Standard Duty models (16.2k lbs. MBS/5.4k lbs. WLL) also available; see catalog pg. 2905-4.

**WORKING LOAD LIMIT (WLL):** 6,666 LBS / 3,030 Kg  
**BREAK STRENGTH (BS):** 20,000 LBS / 9,090 Kg  
**STRAP COLOR:** YELLOW

**NOTE:** For load securing only; NOT for lifting.  
All ratchet strap assemblies should be inspected for frays, cuts or damaged hardware before AND after using.

Designed to meet or exceed WSTDA T-4 Standard.  
Complies with DOT and CA Highway Patrol Title 13.



\*Fixed Length ~18" except w/ Chain Anchor ~33"

**BUFFERS USA INC**

"The Intermodal Hardware Specialists"

**2905-5**



**904-696-0010**

E-mail: [sales@buffersusa.com](mailto:sales@buffersusa.com)

# UTILITY STRAP ASSEMBLIES


## RATCHET STRAPS w/ WIRE HOOKS & S-HOOKS

### RATCHET STRAP ASSEMBLY

**NOTE:** NOT FOR LIFTING.  
LOAD SECURING ONLY.

**1-3/4" x 22' w/ WIRE HOOKS MODEL 2905-1900**

**WORKING LOAD LIMIT (WLL):** 1,667 LBS / 756 Kg  
**BREAK STRENGTH (BS):** 5,000 LBS / 2,268 Kg

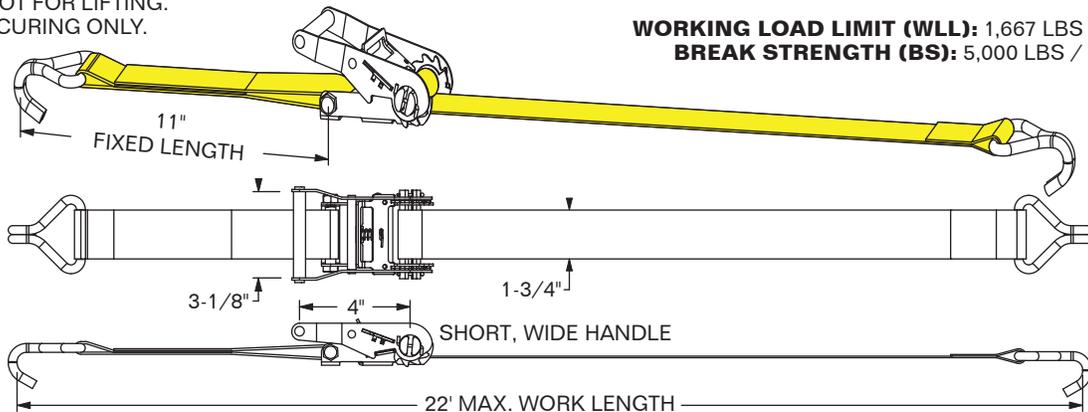

**WEIGHT:** 2.6 LBS / 1.2 Kg **STRAP COLOR:** YELLOW

### RATCHET STRAP ASSEMBLY

**NOTE:** NOT FOR LIFTING. LOAD SECURING ONLY.

**1" x 7' w/ S-HOOKS MODEL 2905-6010**

**1" x 16' w/ S-HOOKS MODEL 2905-6011**

**WORKING LOAD LIMIT (WLL):** 400 LBS / 181 Kg  
**BREAK STRENGTH (BS):** 1,200 LBS / 544 Kg


**1" x 7' w/ S-HOOKS MODEL 2909-6014**

**1" x 10' w/ S-HOOKS MODEL 2905-6016-10**

**\*1" x 15' w/ S-HOOKS MODEL 2905-6016-15**

**1" x 20' w/ S-HOOKS MODEL 2905-6016-20**

**WORKING LOAD LIMIT (WLL):** 1,033 LBS / 467 Kg  
**BREAK STRENGTH (BS):** 3,100 LBS / 1,406 Kg  
**\*WORKING LOAD LIMIT (WLL):** 1,000 LBS / 454 Kg  
**\*BREAK STRENGTH (BS):** 3,000 LBS / 1,360 Kg

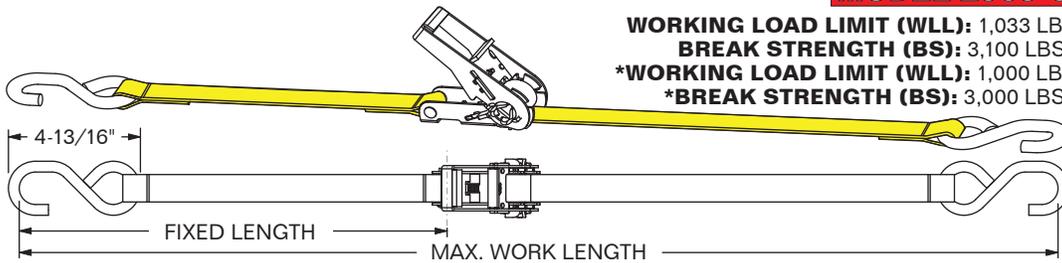


**MODEL 2905-6010 WEIGHT:** 1.3 LBS / 0.58 Kg **FIXED LENGTH:** 12" **STRAP COLOR:** YELLOW  
**MODEL 2905-6011 WEIGHT:** 1.4 LBS / 0.64 Kg **FIXED LENGTH:** 18" **STRAP COLOR:** BLUE  
**MODEL 2909-6014 WEIGHT:** 1.8 LBS / 0.81 Kg **FIXED LENGTH:** 15" **STRAP COLOR:** ORANGE  
**MODEL 2905-6016-10 WEIGHT:** 1.9 LBS / 0.86 Kg **FIXED LENGTH:** 11" **STRAP COLOR:** YELLOW  
**MODEL 2905-6016-15 WEIGHT:** 2 LBS / 0.91 Kg **FIXED LENGTH:** 16" **STRAP COLOR:** YELLOW  
**MODEL 2905-6016-20 WEIGHT:** 2.1 LBS / 0.95 Kg **FIXED LENGTH:** 21" **STRAP COLOR:** YELLOW

### RATCHET STRAP ASSEMBLY

**NOTE:** NOT FOR LIFTING. LOAD SECURING ONLY.

**2" x 12' w/ S-HOOKS MODEL 2905-7642**

**WORKING LOAD LIMIT (WLL):** 833 LBS / 378 Kg  
**BREAK STRENGTH (BS):** 2,500 LBS / 1,134 Kg

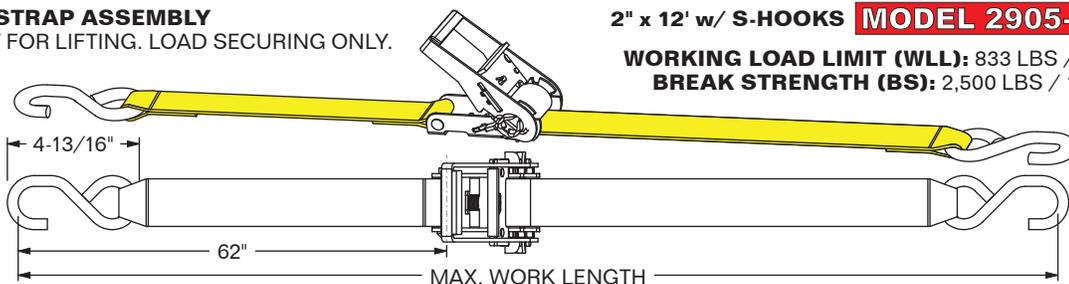

**WEIGHT:** 2.5 LBS / 1.13 Kg **FIXED LENGTH:** 62" **STRAP COLOR:** YELLOW

**SPECIAL ORDER ONLY**

**MODEL 2905-6013**

**CAM BUCKLE STRAP**

1" x 14' w/ Wire Hooks & Web Buckle

**WORKING LOAD LIMIT (WLL):** 400 LBS / 185 Kg

**BREAK STRENGTH (BS):** 1,200 LBS / 544 Kg



**SUB FOR:** KINEDYNE 751281 **STRAP COLOR:** BLUE **WEIGHT:** 1.4 LBS / 0.64 Kg


**MODEL 2905-6042**

**CAM BUCKLE**

2" x 16' w/ Endless Strap

**WORKING LOAD LIMIT (WLL):** 833 LBS / 378 Kg

**BREAK STRENGTH (BS):** 2,500 LBS / 1,134 Kg

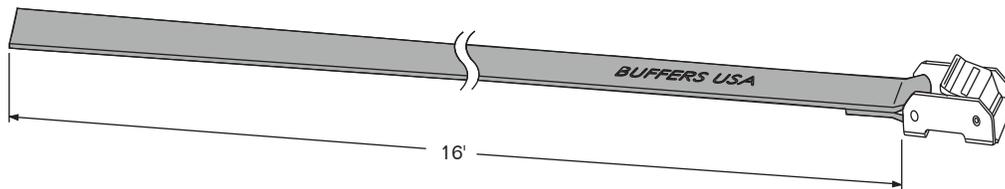

**STRAP COLOR:** GRAY **WEIGHT:** 1.39 LBS / 0.63 Kg



# RATCHET STRAP REPLACEMENT PARTS

CARGO CONTROL

**WEBBING ONLY**  
2" wide, 10k lbs. BS



**MODEL 2905-6092**

2" x 15' Webbing **SPECIAL ORDER**

**MODEL 2905-6093**

2" x 18' Webbing

**MODEL 2905-6047**

2" x 300' Webbing  
Continuous roll - no splicing

**WEBBING ONLY**  
3" wide, 15k lbs. BS



**MODEL 2905-6048**

3" x 100' Webbing  
max. 1 splice / roll

**WEBBING ONLY**  
4" wide, 20k lbs. BS



**MODEL 2905-6078-12**

4" x 12' Webbing **SPECIAL ORDER**

**MODEL 2905-6049**

4" x 100' Webbing  
max. 1 splice / roll

**MODEL 2905-6049-300**

4" x 300' Webbing **SPECIAL ORDER**  
max. 3 splices / roll

**LONG END**  
Fitted w/ Double  
Wire J-Hook



**MODEL 2905-6002-2-20**

for 2" x 20' 6002 Assembly

**MODEL 2905-6002-2-26**

for 2" x 26' 6002 Assembly

**MODEL 2905-6002-2-30**

for 2" x 30' 6002 Assembly

**MODEL 2905-6058-2**

for 2" x 27' 6058 Assembly

**MODEL 2905-6059-2**

for 2" x 30' 6059 Assembly

**MODEL 2905-6082-2**

for 4" x 27' 6082 Assembly  
16.2k lbs. BS

**MODEL 2905-6083-2**

for 4" x 30' 6083 Assembly  
16.2k lbs. BS

**MODEL 2905-6059-4-40**

for 4" x 40' 6082-40 Assembly

**LONG END**  
Fitted w/ Flat Hook



**MODEL 2905-6056-2**

for 2" x 27' 6056 Assembly

**MODEL 2905-6057-2**

for 2" x 30' 6057 Assembly

**MODEL 2904-2805**

for 4" x 27' Assembly, 15k lbs. BS

**MODEL 2904-2806**

for 4" x 30' Assembly, 15k lbs. BS

**LONG END**  
Fitted w/ Grab Hook



**MODEL 2905-6063-2**

for 2" x 30' 6063 Assembly, 10k lbs. BS


**MODEL 2904-2809**

for 4" x 27' Assembly, 16.2k lbs. BS

**MODEL 2904-2810**

for 4" x 30' Assembly, 16.2k lbs. BS

**LONG END**  
Fitted w/ 18" Chain Anchor

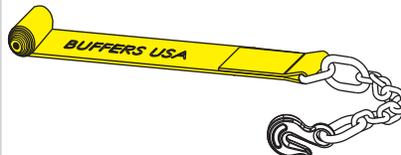

**MODEL 2904-2811**

for 4" x 27' Assembly, 16.2k lbs. BS

**MODEL 2904-2812**

for 4" x 30' Assembly, 16.2k lbs. BS

**BUFFERS USA INC**










"The Intermodal Hardware Specialists"

**2905-8**



**904-696-0010**

E-mail: [sales@buffersusa.com](mailto:sales@buffersusa.com)
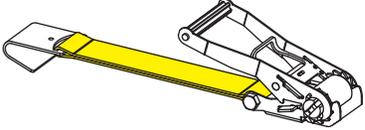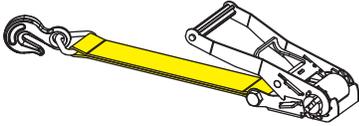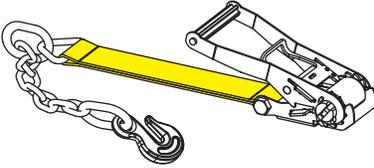
<p><b>RATCHET ONLY</b></p>  <p><b>MODEL 2905-6056-3</b> for 2" Webbing</p> <p><b>MODEL 2905-6068-3</b> for 3" Webbing</p> <p><b>MODEL 2905-6080-3</b> for 4" Webbing</p>	<p><b>RATCHET ASSEMBLY</b> Short End fitted w/ Double Wire J-Hook</p>  <p><b>MODEL 2905-6058-3-KIT-10</b> for 2" Assembly, <b>A = 10"</b> <b>SPECIAL ORDER</b></p> <p><b>MODEL 2905-6058-3-KIT-18</b> for 2" Assembly, <b>A = 18"</b> <b>SPECIAL ORDER</b></p> <p><b>MODEL 2905-6058-3-KIT-60</b> for 2" Assembly, <b>A = 60"</b></p> <p><b>MODEL 2905-6058-3-KIT-78</b> for 2" Assembly, <b>A = 78"</b></p> <p><b>MODEL 2905-6082-3-KIT</b> for 4" Assembly, <b>A = 19-1/2"</b> <b>SP. ORDER</b></p>	<p><b>RATCHET ASSEMBLY</b> Short End fitted w/ Flat Hook</p>  <p><b>MODEL 2905-6056-3-KIT</b> for 2" Assembly</p> <p><b>MODEL 2905-6068-3-KIT</b> for 3" Assembly</p> <p><b>MODEL 2905-6080-3-KIT</b> for 4" Assembly</p>
<p><b>RATCHET ASSEMBLY</b> Short End fitted w/ Grab Hook</p>  <p><b>MODEL 2905-6062-3-KIT</b> for 2" Assembly</p> <p><b>MODEL 2905-6086-3-KIT</b> for 4" Assembly</p>	<p><b>RATCHET ASSEMBLY</b> Short End fitted w/ Chain Anchor</p>  <p><b>MODEL 2905-6060-3-KIT</b> for 2" Assembly</p> <p><b>MODEL 2905-6084-3-KIT</b> for 4" Assembly</p>	<p><b>SHORT END</b> Fitted w/ Double Wire J-Hook</p>  <p><b>MODEL 2905-6058-1</b> for 2" Assembly</p> <p><b>MODEL 2905-6082-1</b> for 4" Assembly</p>
<p><b>SHORT END</b> Fitted w/ Flat Hook</p>  <p><b>MODEL 2905-6056-1</b> for 2" Assembly</p> <p><b>MODEL 2905-6080-1</b> for 4" Assembly <b>SPECIAL ORDER</b></p>	<p><b>SHORT END</b> Fitted w/ Grab Hook</p>  <p><b>MODEL 2905-6062-1</b> for 2" Assembly</p>	<p><b>SHORT END</b> Fitted w/ Chain Anchor</p>  <p><b>MODEL 2905-6060-1</b> for 2" Assembly</p> <p><b>MODEL 2905-6084-1</b> for 4" Assembly</p>

### DOUBLE WIRE J-HOOKS

O.D. 15/32"  
Ø12 MM

3-3/8"  
86 MM

1-5/16"  
33.5 MM

1-5/8"  
41 MM

MODEL	FITS SIZE	A	MBS	WLL	WEIGHT
<b>2905-6058-3</b>	2"	2" 52 MM	10,000 LBS 4,536 Kg	3,333 LBS 1,511 Kg	0.62 LB 0.28 Kg
<b>2902-6082-3</b>	4"	4" 102.6 MM	20,000 LBS 9,072 Kg	5,400 LBS 2,449 Kg	1.76 LBS 0.8 Kg

**MATERIAL:** HIGH-TENSILE STEEL  
**FINISH:** YELLOW ZINC-PLATED

### MODEL 2909-6009-3 SWIVEL J-HOOK for 2"-wide Webbing

O.D. 5/8"  
Ø16 MM

2-1/8"  
55 MM  
(Fits 2" Strap)

**WORKS WITH:** 2909-6009-BU RATCHET TIE-DOWN  
**FINISH:** ZINC-PLATED **WEIGHT:** 1 LB / 0.45 Kg  
**WORKING LOAD LIMIT:** 3,667 LBS  
**MIN. BREAK STRENGTH:** 11,000 LBS

### DELTA RING

MODEL	FITS SIZE	WORKING LOAD LIMIT	WEIGHT
<b>SPECIAL ORDER</b>			
<b>2905-6064-3</b>	2"	3,333 LBS	0.9 LB / 0.41 Kg
<b>2905-6072-3</b>	3"	5,000 LBS	1.3 LBS / 0.59 Kg

MODEL	FITS SIZE	WORKING LOAD LIMIT	WEIGHT
<b>2905-2807-3</b>	4"	5,400 LBS	1.5 LBS / 0.68 Kg

**FINISH:** ZINC-PLATED

### MODEL 2911-6868 WEB STRAP BUCKLE for 2"-wide Webbing

3-9/16"

3-1/8"

2-1/8"

**MATERIAL:** FORGED STEEL  
**FINISH:** ZINC-PLATED  
**WEIGHT:** 0.71 LB / 0.32 Kg  
**MIN. BREAK STRENGTH:** 10,000 LBS

### MODEL 2907-6030-1 CAM BUCKLE for 2"-wide Webbing

2-3/8"

2"

2-3/4"

**MATERIAL:** FORGED STEEL  
**FINISH:** ZINC-PLATED  
**WEIGHT:** 0.55 LB / 0.25 Kg  
**MIN. BREAK STRENGTH:** 3,000 LBS

### SPECIAL ORDER MODEL 2905-6002-3-SL DOUBLE WIRE J-HOOK w/ Spring Latch for 2"-wide Webbing

2"

3"

4-1/2"

2"

O.D. 1/2"  
Ø12 MM

**FINISH:** YELLOW ZINC-PLATED  
**WEIGHT:** 0.92 LB / 0.41 Kg